

TYPE:

CAT. #: DLX16-RM-

# **DLX16-RM** MARINER


The Mariner DLX16-RM downlight is the longest production luminaire in our product line. Continual upgrades over its 25-year history ensure the Mariner is always at the top of its game. The DLX16 Features a thermally conductive Copper core that reduces internal temperature, ensuring peak performance and increased lamp life when using LED lamps. As always, aggressively priced, Made in the USA, and backed by a Lifetime Warranty.

### Features include:

- · Optimized for LED MR16 Retrofit lamps
- 3 Glare Shield Options
- Hermetically Sealed Assembly
- · Solid Brass Construction



DLX16-90-1/2-BLP-XD

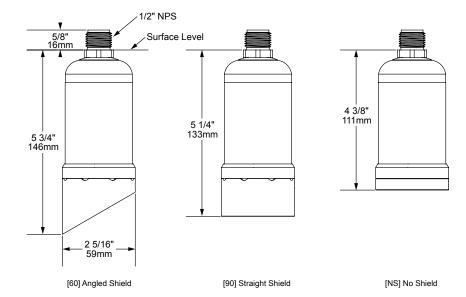



SEE NEXT PAGE FOR ORDERING INFORMATION







TYPE:

CAT. #: DLX16-RM-

# **DLX16-RM** MARINER



ORDERING GUIDE: DLX16 DL (DOWNLIGHT) X (NO LAMP) 16 (MR16 LAMP BASE) R (RIGID) M (MOUNT)

☐ INDICATES REQUIRED FIELD (::)INDICATES OPTIONAL FIELD ✓ INCLUDED [ \_ ]QUICK SPEC (See Below)

QUICK SPEC SKU

**DLX16-90-7W27-H-NAT** 

### DLX16

### SHROUD 🗸 **[60]** 60° Angled [90] 90° Straight

[NS] No Shield

## LED LAMP (92 CRI)

[7N27] 7W, 15°, 2700K [7M27] 7W, 25°, 2700K [7W27] 7W, 35°, 2700K

[7N30] 7W, 15°, 3000K

**[7M30]** 7W, 25°, 3000K [**7W30]** 7W, 35°, 3000K

### **ACCESSORIES**

SELECT UP TO TWO (3/16" each)

[H] Hex Baffle

[L] Linear Spread\*

[P] Prismatic Lens\* [MP] Micro Prismatic\*

[F] Frost (Diffusion)

[O] Opal Lens

[AR] Accessory Retainer (Optional)

\* Limit ONE when AR is selected

### MOUNT

[CP35] 3x5" Brass Cover Plate

[CP4] 4" Brass Cover Plate [CP45] 4 1/2" Brass Cover Plate

[MC45] 4 1/2" Brass Mount Canopy [PC60] 4 1/2" Brass Power Canopy

(Inc. 60W 120-12V Integral Transformer)

[SM2] 2 1/4" Surface Mount

[SM3] 3 1/4" Surface Mount

[SMJB] 3 1/2" Brass Surface Mount J-Box [STM] Screw-In Tree Mount

#### **FINISH**

Standard:

[NAT] Natural 💉

Plus (\$):

[BLP] Bronze Living Patina [BLP-XD] BLP Extra Dark

Premium (\$\$\$):

[NI] Nickel PVD

**[PVD]** PVD Color (Contact Factory for Color Options)

### LED LAMP FACTS

Brightness	580 lumens
Life	25,000hrs
Energy Used	7.5 watts
Halogen Equivalent .	75 watts
CRI	92
Dimmable	Yes
Warranty	5vrs





## **MOUNTS**





