

HDL11-ACS TAOS



The compact HDL11 pendant paired with our exclusive Aurora Catenary System (ACS) is the perfect match for beautifully lighted plazas, courtyards and outdoor common areas. Choose from 9 stunning shroud options to match your aesthetic.

Fixture features include:

- Interchangeable LED Module in 2, 4 or 6 Watts and up to 370 lumens delivered
- Interchangeable UV & Shock Resistant Silicone Optic
- 2700K or 3000K (CRI 80 typ.)
- Thermally Integrated® and Field Serviceable LED Module
- Dimming to <10% typ.
- 12 VAC Electronic or Magnetic
- Solid Brass Construction




Catenary features include:

- Pre-assembled System for Easy Installation
- Catenary Cable up to 1/4" dia. accepted (by other)
- Rigid Mount utilizes Swivel-Pro™ allowing up to 15° of cable swag
- Cable Brake System™ prevents luminaire slippage
- J-box and Luminaire Machined from Solid c3600 Brass Alloy
- UL Approved System
- Also available with Non-Catenary Rigid and Hanging Mount
- Options (See HDL11-RM and HDL11-HL)

SEE NEXT PAGE FOR DIMENSIONS

ORDERING GUIDE: ^{Prefix} **HDL11-ACS** H (HYBRID) DL (DOWN LIGHT) 11 (MR11 SIZE) ACS (AURORA CATENARY SYSTEM)

□ INDICATES REQUIRED FIELD ▭ INDICATES OPTIONAL FIELD

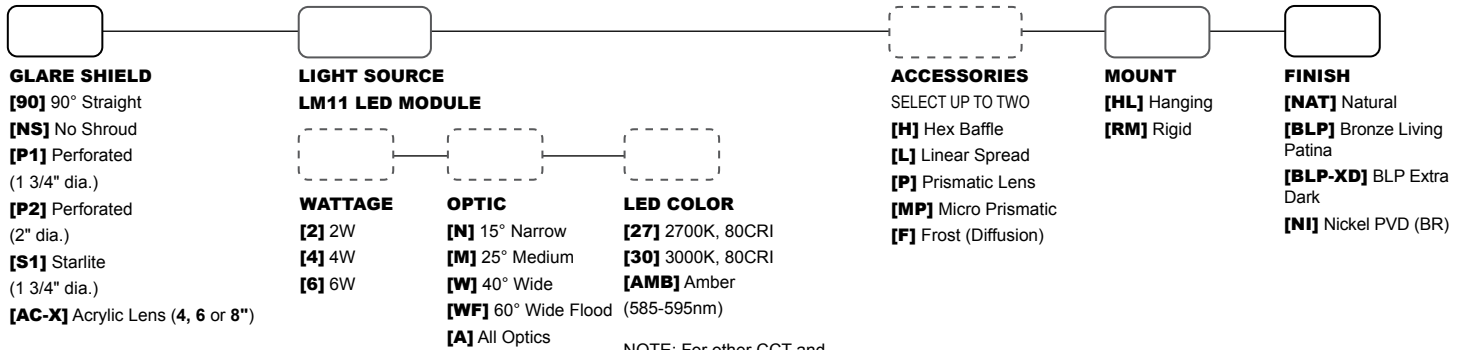

NOTE: For other CCT and CRI options, contact factory

MR11 LED LAMP
 [Dashed Box]
[LBO] Lamp By Other

