


## HPL8 CORONA

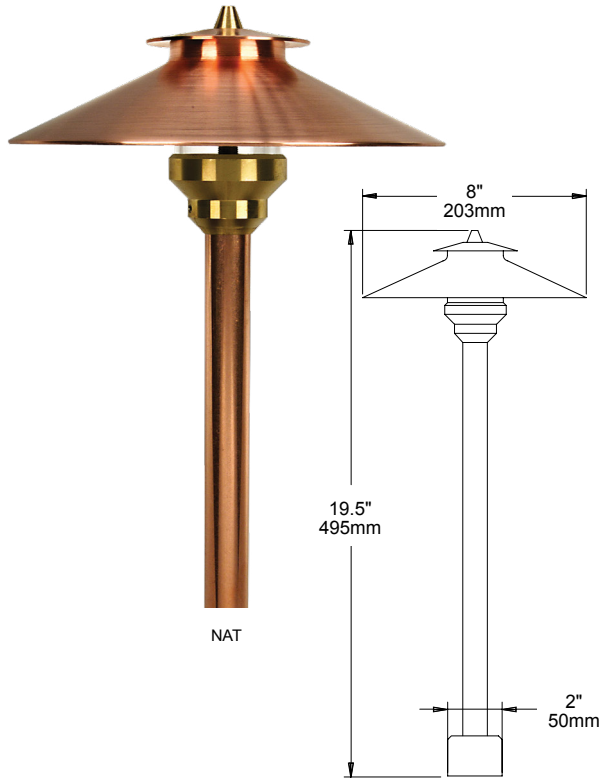


The **HPL8** combines elegance in design with exceptional performance. The Corona is a versatile choice for illuminating intimate gardens, meandering walkways, or large paved areas. With a timeless design, precision manufacturing and the highest quality materials, our HPL luminaires are the clear choice.

Every HPL series path light gives you a choice of a Thermally Integrated® Field Serviceable LED Module or a Halogen/Xelogen lamp. Using Copper Core™ Technology, the HPL LED module is specifically engineered to transfer heat away from the LED driver/circuit and dissipate throughout the luminaire, ensuring optimal performance, color consistency and long life!


### Features include:

- Interchangeable LED Module in 2.5, 3.5 or 5 Watts
- 2700 or 3000K (CRI 80 typ.) Up to 384 Lumens
- Thermally Integrated® Field Serviceable LED Module
- TRIAC Dimming to <10% typ.
- 12 VAC Electronic or Magnetic Source Compatible
- Solid Copper and Brass Construction
- Patent Pending

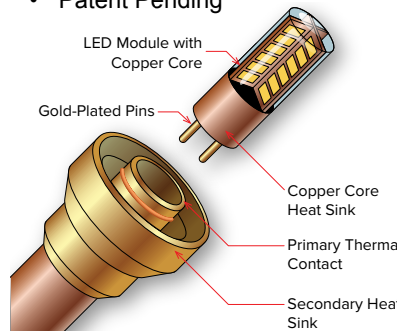

### ORDERING GUIDE: <sup>Prefix</sup> **HPL8** H (HYBRID) PL (PATH LIGHT) 8 (INCHES)

□ INDICATES REQUIRED FIELD    ▭ INDICATES OPTIONAL FIELD



#### Auroralight LED Module

- [227]** 2.5 Watts, 2700k
- [230]** 2.5 Watts, 3000k
- [327]** 3.5 Watts, 2700k
- [330]** 3.5 Watts, 3000k
- [527]** 5 Watts, 2700k
- [530]** 5 Watts, 3000k

#### ACCESSORIES (Select One)

- [180]** 180° Directional Reflector™ \*
- [270]** 270° Directional Reflector™ \*
- [ID]** Internal Diffuser (Frosted)

\* Visible light

#### MOUNT

- [1/2]** 1/2" Male Thread
- [G/S]** Ground Stake (Default)
- [D/S]** Deluxe Stake 9"
- [T/R-X]** Trident Spike (9" or 12")
- [P/B-S]** Power Box w/ Stake (Inc. 60W 120-12V transformer)
- [P/M]** 4" Pedestal Mount
- [SM3]** 3 1/4" Surface Mount
- [SM2]** 2 1/4" Surface Mount

[X] = Specify Length

**NOTE:** See Mount Guide for more options

#### FINISH

- [NAT]** Natural
- [BLP]** Bronze Living Patina
- [BLP-XD]** BLP Extra Dark
- [NI]** Nickel PVD

#### Lumen Output Table

Wattage	Color	Lumens
2.5W	2700K	205lm
2.5W	3000K	212lm
3.5W	2700K	296lm
3.5W	3000K	301lm
5W	2700K	368lm
5W	3000K	384lm

