



LBD350-C11 ARTEMIS

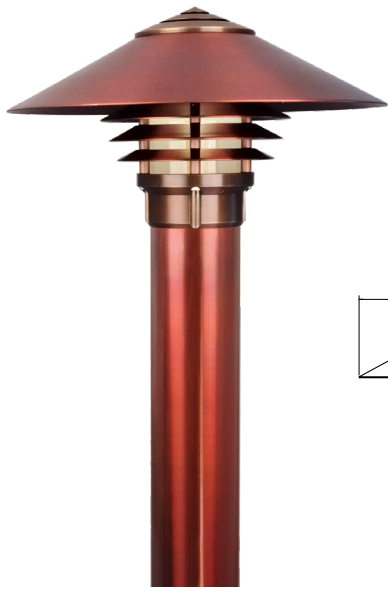

GL-BLP

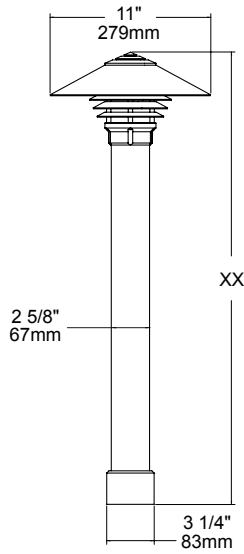

The **LBD350** series of LED Bollards is the latest addition to our growing line of innovative and exquisite area light luminaires. This series is available in seven elegant shade designs with three progressive sizes intended to complement our new series of LML Pendants and LWM Wall Sconces. Coupled to a brass body, our Thermally Integrated® and Field Serviceable LED module provides superior heat dissipation, longer life and higher performance. Ideal for illuminating broad paths, driveways and open exterior spaces.


See *LBD250* and *LBD400* for additional size and configuration options.

Features include:


- 12 or 15 Watts
- Cree XLAMP® High Intensity (XP-L) LED
- 2700, 3000 or 4500K (CRI 80 typ.)
- Thermally Integrated®, Field Serviceable LED Module
- TRIAC Dimming to <10% typ.
- 12 VAC Electronic or Magnetic Source Compatible (or 120 VAC)
- Solid Copper and Brass Construction




CORE STYLES



[GL] Graduated Louvers




[SL] Stacked Louvers



[NL] No Louvers

ORDERING GUIDE: **LBD350-C11** L (LED) BD (BOLLARD) 350 (SERIES) C (CONICAL) 11 (INCHES)

□ INDICATES REQUIRED FIELD ▤ INDICATES OPTIONAL FIELD



CORE	WATTAGE	LED COLOR	HEIGHT	VOLTAGE	MOUNT	FINISH
[GL] Graduated Louvers	[12] 12W	[27D] 2700K	[26] 26"	[12] 12V	[1/2] 1/2" Male Thread	[NAT] Natural
[SL] Stacked Louvers	[15] 15W	[30D] 3000K	[32] 32"	[120] 120V	[G/S] Ground Stake	[BLP] Bronze Living Patina
[NL] No Louvers		[45D] 4500K	[XX] Specify Min: 12" Max: 48"		[T/R] 12" Trident Spike	[BLP-XD] BLP Extra Dark
		[D] = Dimmable			[S/M] Surface Mount	[NI] Nickel PVD
					[L/P] Leveling Pedestal	
					[P/M] Pedestal Mount	

NOTE: See BD Mount Guide for more options

