

LBD400-C14 ARTEMIS

The LBD400 series of LED Bollards are the latest addition to our growing line of innovative and exquisite area light luminaires. This series is available in seven elegant shade designs with three progressive sizes to complement our new LML Pendants and LWM Wall Sconces. Our Thermally Integrated® and Field Serviceable LED modules provide superior heat dissipation, longer life, and higher performance. Ideal for illuminating grand pathways, estate-sized driveways, and expansive outdoor spaces.


See LBD250 and LBD350 for additional size and configuration options.

Features include:

- Up to 1500 lumens at 30 Watts
- Cree XLAMP® High Intensity (XP-L) LED
- 2700K (80 & 90 CRI) or 3000K (80 CRI)
- Thermally Integrated® w/ Copper Core Technology®
- 0-10V Dimming (Upon Request)
- 100-277 VAC
- Solid Copper and Brass Construction



LBD400-C14-BLP

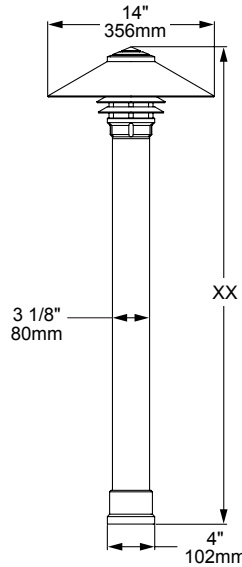

CORE STYLES

[GL] Graduated Louvers

[SL] Stacked Louvers

[NL] No Louvers

COPPER CORE TECHNOLOGY®

Copper Core® is a registered trademark of Auroralight. It is synonymous with the mark of quality and integrity. It means that our products are built upon a superior foundation of Solid Copper, ensuring every critical part functions seamlessly together Thermally integrated® one component to the next. Auroralight manufactured without compromise, engineered with passion, in the USA.

100/277V

THERMALLY INTEGRATED

SEE NEXT PAGE FOR ORDERING INFORMATION






LBD400-C14 ARTEMIS

ORDERING GUIDE: ^{Prefix} **LBD400-C14** L (LED) BD (BOLLARD) 400 (SERIES) C (CONICAL) 14 (INCHES)

INDICATES REQUIRED FIELD INDICATES OPTIONAL FIELD INCLUDED [_] QUICK SPEC (See Below)

QUICK SPEC SKU **LBD400-C14-GL-27-D-40-SM-NAT**

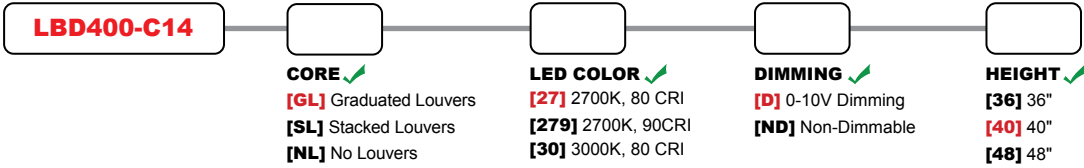


NOTE: For other CCT and CRI options, contact factory



[LP] Leveling Pedestal*
[SM] Surface Mount ✓

*Recommended for concrete installations.

Standard:
[NAT] Natural ✓
 Plus (\$):
[BLP] Bronze Living Patina
[BLP-XD] BLP Extra Dark
 Premium (\$\$\$):
[NI] Nickel PVD
[PVD] PVD Color
 (Contact Factory for Color Options)



LBD400-C14 ARTEMIS

PHOTOMETRIC OVERVIEW

Information based on 20W 3000K. To download more in-depth IES photometric data, visit auroralight.com/product/lbd400-c14-artemis/

Mounting Height - 4 Feet

