


LBD400-C14-GTL CYRANOS



GL-BLP

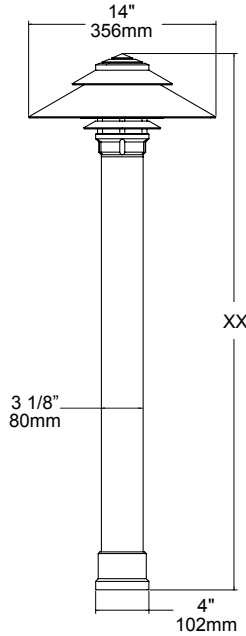

The **LBD400** series of LED Bollards is the latest addition to our growing line of innovative and exquisite area light luminaires. This series is available in six elegant shade designs with three progressive sizes intended to complement our new series of LML Pendants and LWM Wall Sconces. Coupled to a brass body, our Thermally Integrated® and Field Serviceable LED module provides superior heat dissipation, longer life and higher performance. Ideal for illuminating promenades, plazas, courtyards and seaside boardwalks.


See *LBD250* and *LBD350* for additional size and configuration options.

Features include:


- 20 or 30 Watts
- Cree XLAMP® High Intensity (XP-L) LED
- 2700, 3000 or 4500K (CRI 80 typ.)
- Thermally Integrated®, Field Serviceable LED Module
- 0-10V Dimming (Upon Request)
- 100-277 VAC
- Solid Copper and Brass Construction




CORE STYLES



[GL] Graduated Louvers



[SL] Stacked Louvers



[NL] No Louvers

ORDERING GUIDE: **LBD400-C14-GTL** ^{Prefix} L (LED) BD (BOLLARD) 400 (SERIES) C (CONICAL) 14 (INCHES) GTL (GLIMMER TOP W/ LOUVER)

□ INDICATES REQUIRED FIELD

⋯ INDICATES OPTIONAL FIELD

CORE	WATTAGE	LED COLOR	DIMMING	HEIGHT	MOUNT	FINISH
[GL] Graduated Louvers	[20] 20W	[27] 2700K	[D] 0-10V Dimming	[36] 36"	[S/M] 3 1/2" Heavy Duty Surface Mount	[NAT] Natural
[SL] Stacked Louvers	[30] 30W	[30] 3000K	[ND] Non-Dimmable	[40] 40"	[L/P] Heavy Duty Leveling Pedestal*	[BLP] Bronze Living Patina
[NL] No Louvers		[45] 4500K		[48] 48"		[BLP-XD] BLP Extra Dark
						[NI] Nickel PVD

*Recommended for concrete installations.

