


LMG3 MAGLIO

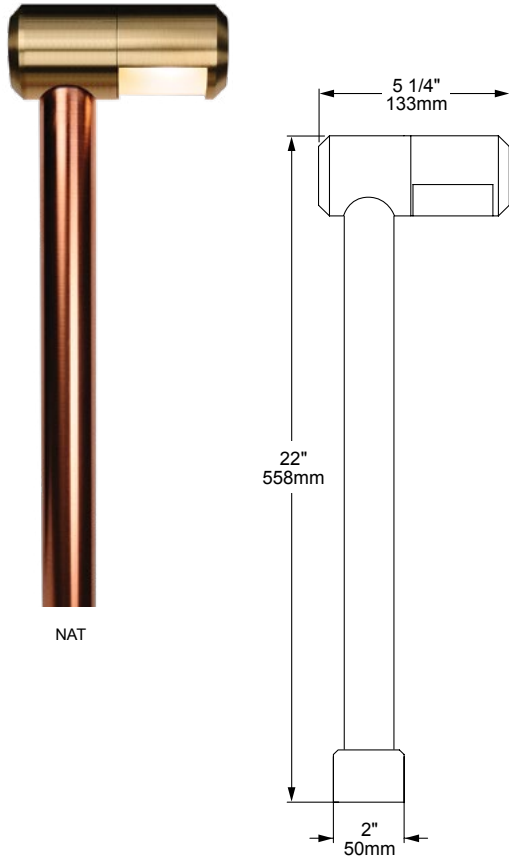


The **LMG3** is among the most versatile in our line of high quality, high performance path lights. Featuring a rotational glare shield with an independently rotating light engine allowing the Maglio to have a seamlessly adjustable aperture from 180° down to 0°, or to aim up, down or anywhere in between. Also ideal for wall washing applications.

Features include:

- 5 Watts
- Cree XLAMP® (XR-E) LED
- 2700 or 3000K (CRI 80 typ.)
- Fully Integrated LED
- TRIAC Dimming to <10% typ.
- 12 VAC Electronic or Magnetic Source Compatible
- Recommended Spacing 15–25' O.C.
- Solid Copper and Brass Construction




INDEPENDENTLY ADJUSTABLE LIGHT SOURCE & SHIELD

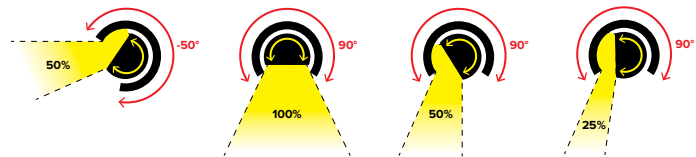

ORDERING GUIDE: ^{Prefix} **LMG3** L (LED) MG (MAGLIO) 3 (SERIES)

□ INDICATES REQUIRED FIELD □□ INDICATES OPTIONAL FIELD



LED COLOR
[27] 2700K
[30] 3000K

PL MOUNT
[1/2] 1/2" Male Thread
[G/S] Ground Stake
[D/S] Deluxe Stake 9"
[T/R-X] Trident Spike (9" or 12")
[P/B-S] Power Box w/ Stake (Inc. 60W 120-12V trans.)
[P/M] 4" Pedestal Mount
[SM3] 3 1/4" Surface Mount
[SM2] 2 1/4" Surface Mount

FINISH
[NAT] Natural
[BLP] Bronze Living Patina
[BLP-XD] BLP Extra Dark
[NI] Nickel PVD

[X] = Specify Length
NOTE: See Mount Guide for more options

