


LPL1 CENTINELA



BLP

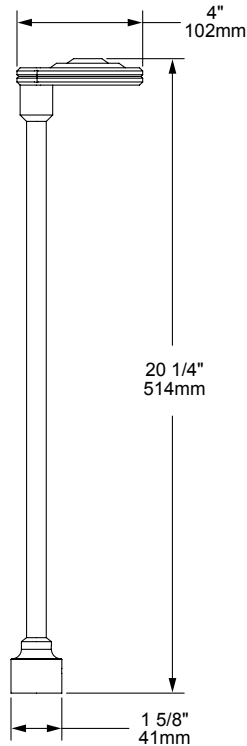

The **LPL1** is a stylish, low energy LED path light. Its contemporary design and slim profile allow it to blend seamlessly into the surrounding landscape.

Features include:

- 2.5 Watts
- Cree XLAMP® (XP-G) LED
- 2700K or 3000K (CRI 80 typ.)
- Fully Integrated LED
- TRIAC Dimming to <10% typ.
- 12 VAC Electronic or Magnetic Source Compatible
- Recommended Spacing 10–18' O.C.
- Solid Copper and Brass Construction



ORDERING GUIDE: ^{Prefix} **LPL1** L (LED) PL (PATH LIGHT) 1 (SERIES)

□ INDICATES REQUIRED FIELD ▤ INDICATES OPTIONAL FIELD



LED COLOR

- [27]** 2700K, 80CRI
- [30]** 3000K, 80CRI

NOTE: For other CCT and CRI options, contact factory

PL MOUNT

- [1/2]** 1/2" Male Thread
- [G/S]** Ground Stake
- [D/S]** Deluxe Stake 9"
- [T/R-X]** Trident Spike (9" or 12")
- [P/B-S]** Power Box w/ Stake (Inc. 60W 120-12V trans.)
- [P/M]** 4" Pedestal Mount
- [SM3]** 3 1/4" Surface Mount
- [SM2]** 2 1/4" Surface Mount

[X] = Specify Length

NOTE: See Mount Guide for more options

FINISH

- [NAT]** Natural
- [BLP]** Bronze Living Patina
- [BLP-XD]** BLP Extra Dark
- [NI]** Nickel PVD

