


LPL1 CENTINELA

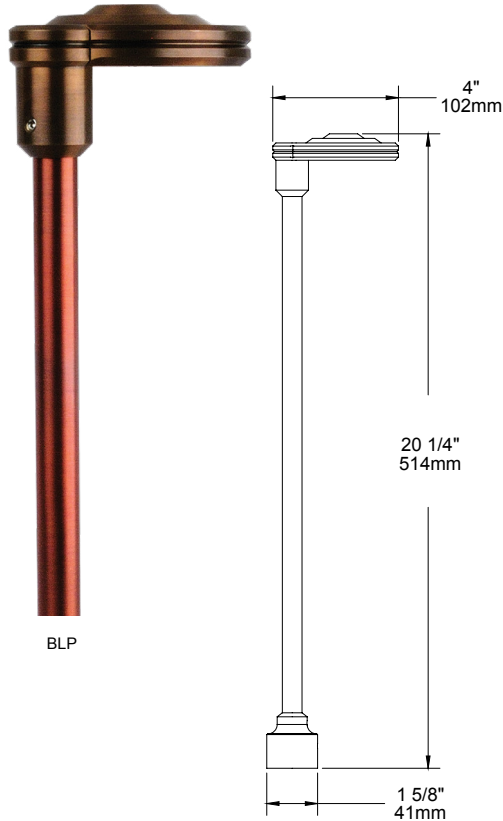

The **LPL1** is a stylish, low energy LED path light. Its contemporary design and slim profile allow it to blend seamlessly into the surrounding landscape.


Features include:

- 2.5 Watts
- Cree XLAMP® (XP-G) LED
- 2700, 3000 or 4500K (CRI 80 typ.)
- Fully Integrated LED
- TRIAC Dimming to <10% typ.
- 12 VAC Electronic or Magnetic Source Compatible
- Recommended Spacing 10–18' O.C.
- Solid Copper and Brass Construction



ORDERING GUIDE: ^{Prefix} **LPL1** L (LED) PL (PATH LIGHT) 1 (SERIES)

□ INDICATES REQUIRED FIELD □ INDICATES OPTIONAL FIELD



LED COLOR

- [27] 2700K
- [30] 3000K
- [45] 4500K
- [27D] 2700K
- [30D] 3000K
- [45D] 4500K

[D] = Dimmable

PL MOUNT

- [1/2] 1/2" Male Thread
- [G/S] Ground Stake
- [D/S] Deluxe Stake 9"
- [T/R-X] Trident Spike (9" or 12")
- [P/B-S] Power Box w/ Stake (Inc. 60W 120-12V trans.)
- [P/M] 4" Pedestal Mount
- [SM3] 3 1/4" Surface Mount
- [SM2] 2 1/4" Surface Mount

[X] = Specify Length

NOTE: See Mount Guide for more options

FINISH

- [NAT] Natural
- [BLP] Bronze Living Patina
- [BLP-XD] BLP Extra Dark
- [NI] Nickel PVD

