


## LPL2 SCEPTER




4" Spherical Shade

No Shade

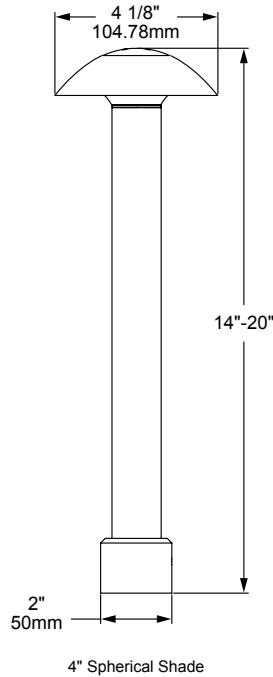

4" Spherical Shade



No Shade

The ultra-compact size of the **LPL2** allows for it to be installed discretely into planters and is ideal for illuminating pathways and intimate garden areas. Use anywhere a less obvious light source is desired. With a modern, yet timeless design, precision manufacturing and the highest quality materials, the LPL2 luminaire is the perfect choice for any landscaping project.

Every LPL2 path light includes a Thermally Integrated® Field Serviceable LED Module. Utilizing our Copper Core Technology®, the LPL2 module is specifically engineered to transfer heat away from the LED driver/circuit and dissipate throughout the luminaire, ensuring optimal performance, color consistency and long life!


**Features include:**

- 5 Watt LED
- 2700K or 3000K (CRI 80 typ.)
- Thermally Integrated, Field Serviceable LED Module
- TRIAC Dimming to <10% typ.
- 12 VAC Electronic or Magnetic Source Compatible
- Solid Copper and Brass Construction
- Field Replaceable, UV & Shock Resistant Acrylic Lens
- Patent Pending



**ORDERING GUIDE:** <sup>Prefix</sup> **LPL2** L (LED) PL (PATH LIGHT) 2 (SERIES)

□ INDICATES REQUIRED FIELD    ▤ INDICATES OPTIONAL FIELD



**LED COLOR**

- [27]** 2700K, 80CRI
- [30]** 3000K, 80CRI
- [AMB]** Amber (585-595nm)

NOTE: For other CCT and CRI options, contact factory

**SHADE STYLE**

- [NS]** No Shade
- [S4]** Spherical 4" Shade

**HEIGHT**

- [14]** 14"
- [16]** 16"
- [18]** 18"
- [20]** 20"

**MOUNT**

- [1/2]** 1/2" Male Thread
- [G/S]** Ground Stake (Default)
- [D/S]** Deluxe Stake 9"
- [T/R-X]** Trident Spike (9" or 12")
- [P/B-S]** Power Box w/ Stake (Inc. 60W 120-12V transformer)
- [P/M]** 4" Pedestal Mount
- [SM3]** 3 1/4" Surface Mount
- [SM2]** 2 1/4" Surface Mount

[X] = Specify Length

NOTE: See Mount Guide for more options

**FINISH**

- [NAT]** Natural
- [BLP]** Bronze Living Patina
- [BLP-XD]** BLP Extra Dark
- [NI]** Nickel PVD

