

LSL6-DL CYCLOPS



BR-BLP
(Actual Size)


The down light version of Auroralight's new **LSL6** is a Micro-Directional X-Platform IP67 luminaire that features a Thermally Integrated® and Field Serviceable LED module. The machined ball and socket design incorporates a remarkably small yet capable Cree® powered light engine. The easily replaceable, self-contained ball fits snugly into a precision machined socket for exceptional heat dissipation allowing this tiny luminaire to operate at 3 watts.

Features include:

- 3 Watts
- Cree XLAMP® High Density (XP-L) LED
- 2700, 3000K or 4500 (CRI 80 typ.)
- Thermally Integrated®, Field Serviceable LED Module
- TRIAC Dimming to <10% typ.
- 12 VAC Electronic or Magnetic Source Compatible
- Solid Copper and Brass Construction
- Patent Pending



12V

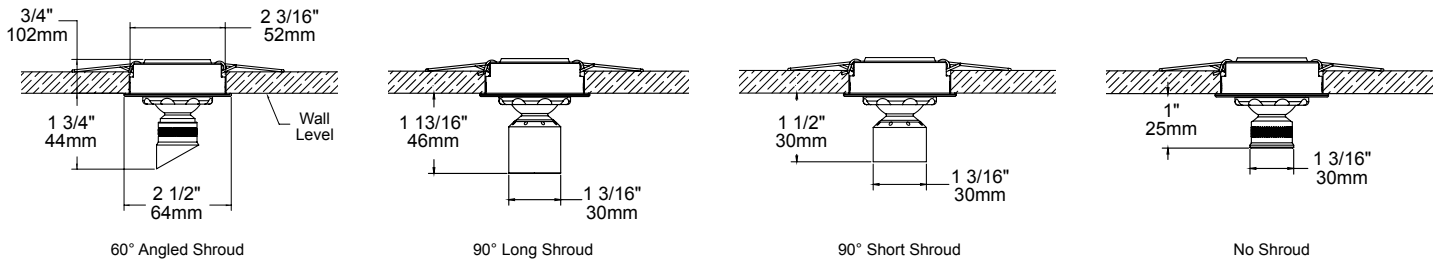

ORDERING GUIDE: LSL6-DL L (LED) SL (SPOTLIGHT) 6 (SERIES) DL (DOWN LIGHT)

□ INDICATES REQUIRED FIELD □□ INDICATES OPTIONAL FIELD

MATERIAL	SHROUD	OPTIC	LED COLOR	FINISH
[BR] Brass [CU] Copper*	[60] 60° Angled [L90] 90° Long [S90] 90° Short [NS] No Shroud	[N] 15° Narrow [M] 25° Medium [W] 40° Wide [EL] Elliptical	[27D] 2700K [30D] 3000K [45D] 4500K [D] = Dimmable	[NAT] Natural [BLP] Bronze Living Patina [BLP-XD] BLP Extra Dark [NI] Nickel PVD

*Shroud, ball and base remains Brass

