

# LSW4 AXIS




BLP

The **LSW4** is a high performance low energy LED step/wall light that features unmatched aiming ability. By combining a full 45° of tilt onto the horizon with 360° of rotation and the ability to regress the light source up to 2" below the lens; the LSW4 is in a class of its own.

See **LSW8** and **LSW16** for additional size and wattage options.

**Features include:**

- 6 Watts and up to 184 lumens delivered
- 2700K or 3000K
- Thermally Integrated™ Field Serviceable LED Module
- IC Rated for Interior and Exterior Use
- Dimming to <10% typ.
- 12 VAC Electronic or Magnetic
- Solid Brass Construction

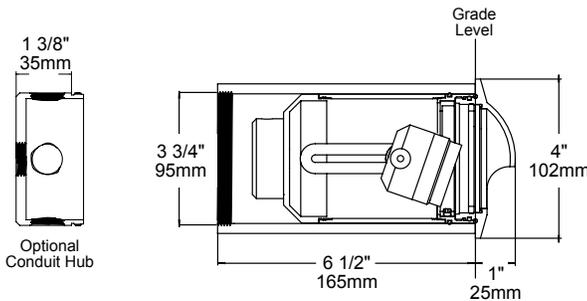

**ORDERING GUIDE:** <sup>Prefix</sup> **LSW4** L (LED) SW (STEP/WALL LIGHT) 4 (INCHES)

□ INDICATES REQUIRED FIELD    ▭ INDICATES OPTIONAL FIELD

OPTIC	LED COLOR	ACCESSORIES	MOUNT	FINISH
<b>[N]</b> 20° Narrow <b>[M]</b> 30° Medium <b>[W]</b> 40° Wide <b>[WF]</b> 50° Wide Flood <b>[SF]</b> 60° Super Flood <b>[UF]</b> 75° Ultra Flood <b>[A]</b> All Optics Kit	<b>[27D]</b> 2700K <b>[30D]</b> 3000K  [D] = Dimmable	<b>[H]</b> Hex Baffle (Included) <b>[HD]</b> Deep Hex Baffle <b>[L]</b> Linear Spread <b>[P]</b> Prismatic Lens <b>[MP]</b> Micro Prismatic <b>[F]</b> Frost (Diffusion) <b>[R1, 2, 3 or 4]</b> Red <b>[G1, 2, 3, or 4]</b> Green <b>[B1, 2, 3, or 4]</b> Blue <b>[Y1, 2, 3 or 4]</b> Yellow	<b>[PVC]</b> PVC Sleeve (default) <b>[CHA]</b> Conduit Hub, Aluminum w/PVC <b>[CHB]</b> Conduit Hub, Brass w/PVC	<b>[NAT]</b> Natural <b>[BLP]</b> Bronze Living Patina <b>[BLP-XD]</b> BLP Extra Dark <b>[NI]</b> Nickel PVD

**MOUNT OPTIONS**

