

## LSW8-FL MERIDIAN




BR-NAT

The **LSW8-FL** down light has a faceplate diameter of just 2 1/4" and an aperture of 1", making it one of the smallest down lights available. The LED package used in the LSW8 is the very latest technology delivering excellent performance and halogen-like color temperature.

### Features include:

- 1.25 Watts and up to 138 lumens
- Cree XLAMP® (XP-L) LED
- Interchangeable UV & Shock Resistant Silicone Optic
- 2700K or 3000K (CRI 80 typ.)
- Thermally Integrated®, Field Serviceable LED Module
- TRIAC Dimming to <10% typ.
- 12 VAC Electronic or Magnetic
- IC Rated for Interior and Exterior Use
- Copper Body with Solid Brass Faceplate

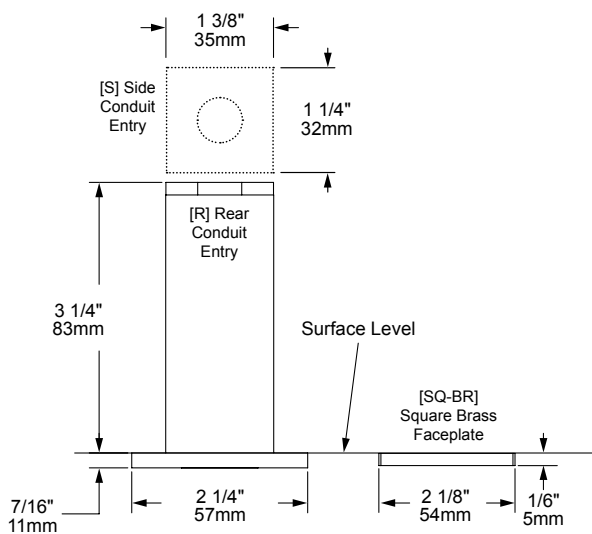

### FACEPLATE OPTIONS



SQ-BR-NAT



BR-NAT




BR-NI



BR-BLP

### ORDERING GUIDE: **LSW8-FL** L (LED) SW (STEP/WALL LIGHT) 8 (8 X 1/8) FL (FLUSH FACEPLATE)

□ INDICATES REQUIRED FIELD    ◻ INDICATES OPTIONAL FIELD



#### FACEPLATE

- [BR] Brass
- [SQ-BR] Square Brass

#### OPTIC

- [N] 15° Narrow
- [M] 25° Medium
- [W] 40° Wide
- [WF] 60° Wide Flood
- [A] All Optics Kit

#### LENS

- [F] Frosted
- [C] Clear
- [DL] Black Dipped Lens

#### LED COLOR

- [27] 2700K, 80CRI
- [30] 3000K, 80CRI
- [AMB] Amber (585-595 nm)

#### MOUNT

- [R] Rear Conduit Entry
- [S] Side Conduit Entry


#### FINISH

- [NAT] Natural
- [BLP] Bronze Living Patina
- [BLP-XD] BLP Extra Dark
- [NI] Nickel PVD (BR)

NOTE: For other CCT and CRI options, contact factory

### Highly Configurable Machined Brass LED Module

IP67 sealed module with encapsulated electronics, Copper PCB and interchangeable silicone optics.



Interchangeable UV & Shock Resistant Silicone Optic

