

LSW8-PL MERIDIAN



The LSW8-PL is an ideal solution for uniform spacing and light levels in the absence of a structure. Its small aperture effectively shields against glare while allowing for excellent forward projection with even illumination side to side. Pair with our LSW8 step/wall light for design continuity throughout your project.


Features include:

- 1.25 Watts and up to 45 lumens
- Cree XP-L® High Density LED
- 2700K or 3000K (CRI 80 typ.)
- Interchangeable UV & Shock Resistant Silicone Optic
- Thermally Integrated®, Field Serviceable LED Module
- TRIAC Dimming to <10% typ.
- 12 VAC Electronic or Magnetic
- Copper and Brass Body w/ Brass or Copper Faceplate

Powered by
CREE
LEDs

12V

COPPER CORE
TECHNOLOGY.

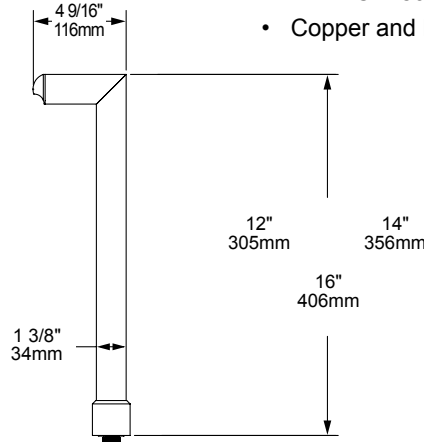


FACEPLATE OPTIONS



ORDERING GUIDE: **LSW8-PL** L (LED) SW (STEP/WALL) 8 (8 X 1/8 INCHES) PL (PATH LIGHT)

☐ INDICATES REQUIRED FIELD ☐ INDICATES OPTIONAL FIELD



FACEPLATE
[BR] Brass
[CU] Copper

OPTIC
[N] 15° Narrow
[M] 25° Medium
[W] 40° Wide
[WF] 60° Wide Flood
[A] All Optics

LED COLOR
[27] 2700K, 80CRI
[30] 3000K, 80CRI
[AMB] Amber (585-595nm)
NOTE: For other CCT and CRI options, contact factory

HEIGHT
[12] 12"
[14] 14"
[16] 16"
[XX] Specify

MOUNT
[1/2] 1/2" Male Thread
[G/S] Ground Stake
[T/R-X] Trident Spike (9" or 12")
[P/B-S] Power Box w/ Stake (Inc. 60W 120-12V transformer)
[P/M] 4" Pedestal Mount
[SM3] 3 1/4" Surface Mount
[SM2] 2 1/4" Surface Mount

FINISH
[NAT] Natural
[BLP] Bronze Living Patina
[BLP-XD] BLP Extra Dark
[NI] Nickel PVD (Faceplate only)

[X] = Specify Length
NOTE: See Mount Guide for more options

Highly Configurable Machined Brass LED Module

IP67 sealed module with encapsulated electronics, Copper PCB and interchangeable silicone optics.

