# LUMIÈRE LADDER LIGHTS KIT - 2.5' W X 7.5' H

LUMIERE LIGHT WALL

PRODUCT CODE: LLW-LED1X3











#### PRODUCT DESCRIPTION


Illuminate your message with the Lumiere Light Wall! Lumiere ladder lights make backlit graphics pop on this innovative combo display of silicone-edge graphics and portable RPL fabric pop ups. Plus, the Lumiere shrinks down in size: simply collapse the geometric frame and the SEG bungeed channel bars, and fold or roll the fabrics graphics. Setup requires 1 person and 5-10 minutes. SEG portability is easy and stylish.

-	
DISPLAY DIMENSION	26.875" W x 24.25" H x .5" D
DISPLAY CONSTRUCTION	
LED Lights Strips	Plastic Wire Connectors
LADDER LIGHTS SPECIFICATION	
EACH LIGHT BEAD	1.0W
ANGLE	170°
OPERATING VOLTAGE	DC12V/24V
TOTAL WATTAGE	105W
TOTAL AMPERAGE	4.5A
TRANSFORMER SPECIFICATION	
OUTPUT	24V/3.75A
INPUT	AC100-240V/1.3A
SHIPPING WEIGHTS & DIMENSIONS	
Shipping Weight	8 lbs
Shipping Dimensions	7.5" L x 5.5" W x 30.5" H
LARGE QUANTITY FREIGHT	
Freight Shipping	30 boxes per 48" L x 40" W x 28.5" H skids
Freight Weight	168 lbs
AVAILABILI	TY CA and PA





# PARTS LIST



Qty 3 - Ladder Lights



Qty 1 - Transformer



Qty 1 - Transformer Power Cord




Qty 1 - Ladder Light Travel Bag

## **SET UP INSTRUCTIONS 1/2**


## **Set Up Pop Up Frame**



a. Place frame with the adjustable feet facing down.




**b.** Expand the frame.



c. Close frame by pushing the outside of the frame until male and female ends connect.

### **Insert Channel Bars**

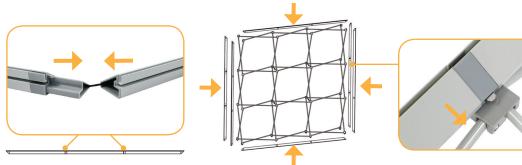

**a.** Expand each channel bar. Follow bungee to connect.

**b.** Attach channel bars to frame.



c. Slide channels bars onto frame, from top to bottom, then secure onto metal peg.



d. Attach the top and bottom endcaps on each side of the frame.

#### **Unfold The Hooks**



a. Locate each hook.



**b.** Turn each hook outward.



c. Twist each hook to face the front of the ladder light.

## SET UP INSTRUCTIONS 2/2

### **Hook Ladder Lights**



**a.** Hang ladder lights from top "x" bar. *Note:* Make sure to follow label that says "UP" or "DOWN".



**b.** Hang ladder lights in each section of the frame until reaching the bottom of the frame.

### **Connect Ladder Lights**



**a.** Connect each ladder light together using the barrel connectors.



**b.** Connect bottom set of lights to the LED Driver using the barrel connectors



**c.** Insert power cord to the LED Driver. Plug other side into your main power outlet.

### **Install Graphic**



**a.** In each corner, insert the silicone edge beading into the groove.



**b.** Then insert the remainder of the beading. Repeat blockout installation for the back frame.



**c.** Then repeat graphic installation on the end caps for each side.