

MINING SLURRY HOSE 150 PSI

Construction:

Tube: Black NR/SBR rubber compound.

Reinforcement: Multi ply synthetic fabric with wire helix.

Cover: Black NR/SBR corrugated abrasion and weather resistant.

Application:


Slurry hoses are designed primarily for handling abrasive and viscous slurries from mine and quarries. They can also be used for handling dry materials such as sand, gravel and grains. The external bolt on the flanges allow for easy installation and uninterrupted free flow.

Characteristic:

- Rugged Versatile alternative to inflexible steel piping system
- Absorb system vibration and saves wear on equipment.
- Can be cut to length and assembled on-site for immediate installation
- Split flange coupling

Temperature:

-40°C to +82°C (-40 °F to +180 °F)

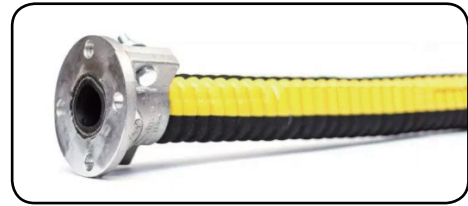

Item code	I.D.		O.D.		W.P.		B.P.		Min B.R.		Length	
	mm	inch	mm	inch	psi	bar	psi	bar	inch	mm	ft	m
MSH051	51	2	79	3.11	150	10	450	30	12	305	200	61
MSH076	76	3	118	4.65	150	10	450	30	14	356	200	61
MSH102	102	4	137	5.38	150	10	450	30	20	508	200	61
MSH127	127	5	167	6.58	150	10	450	30	26	660	200	61
MSH152	152	6	196	7.73	150	10	450	30	30	762	40	12
MSH203	203	8	255	10.02	150	10	450	30	68	1727	40	12
MSH254	254	10	302	11.89	150	10	450	30	78	1981	40	12
MSH305	305	12	349	13.74	150	10	450	30	98	2489	40	12
MSH355	355	14	416	16.36	150	10	450	30	111	2819	40	12

PERISTALTIC PUMP HOSE

Construction:

Tube: Black, smooth, rubber compound

Reinforcement: Multi ply heavy duty synthetic cord

Cover: Black, wrapped, synthetic rubber

Application:

The peristaltic pump hoses are specifically engineered for application on peristaltic pumps, it is designed and manufactured for long operational life and minimized cost.

Characteristic:

- Extremely durable, high abrasion ozone & weather resistance.
- The lowest possible friction between the hose and roller

Temperature: -40°C to +100°C



Item Code	I.D.	O.D.	O.D.	Tolerance	Reinforcement	W.P.	LENGTH
	mm	mm	mm	mm	Ply	bar	mm
PPH1032	10	32	31/32	± 0,5	2	8	570
PPH1537	15	37	36/37	± 0,5	2	8	830
PPH2037	20	37	36/37	± 0,5	2	8	830
PPH2554	25	54	53/54	± 0,5	4	16	1,090
PPH3263	32	63	61/62	± 0,5	4	16	1,300
PPH3863	38	63	62/63	± 0,5	4	16	1,300
PPH4067	40	67	66/67	± 0,5	4	16	1,500
PPH4581	45	81	80/81	± 0,5	4	16	1,850
PPH5081	50	81	80/81	± 0,5	4	16	1,850
PPH6087	60	87	86/87	± 0,5	4	16	1,850
PPH65100	65	100	99/100	± 0,5	4	16	2,335
PPH80124	80	124	120/121	± 0,5	6	16	2,910
PPH100145	100	145	144/145	± 0,5	6	16	3,410
PPH125168	125	168	167/168	± 0,5	6	16	4,000