


SK electric chain hoist

Technical data(single speed)										
Model	Sk0.25	Sk0.5	Sk1	Sk1.5	Sk2-1	Sk2-2	Sk2.5	Sk3-1	Sk3-2	Sk5
Capacity(t)	0.25	0.5	1	1.5	2	2	2.5	3	3	5
Lifting speed (m/min)	9.2	8.3	6.3	8.5	6.9	3.2	6.6	6.6	4.2	3.3
Motor power (kw)	0.56	0.9	1.5	3.0	3.0	1.5	3.0	3.0	3.0	3.0
Rotation speed (r/min)	1440r/min									
Insulation grade	F									
Power supply	3-phase/220v-380v									
Control voltage	24v/36v/48v									
No.of chain	1	1	1	1	1	2	1	1	2	2
Spec. of load chain	4.0m	6.3m	7.1m	10.0m	10.0m	7.1m	11.2m	11.2m	10mm	11.2m
Technical data(frequency transformer)										
Model	Sk0.25	Sk0.5	Sk1	Sk1.5	Sk2-1	Sk2-2	Sk2.5	Sk3-1	Sk3-2	Sk5
Capacity(t)	0.25	0.5	1	1.5	2	2	2.5	3	3	5
Lifting speed (m/min)	0.92-9.2	0.83-8.3	0.83-8.3	0.85-8.5	0.69-6.9	0.32-3.2	0.66-6.6	0.66-6.6	0.42-4.2	0.33-3.3

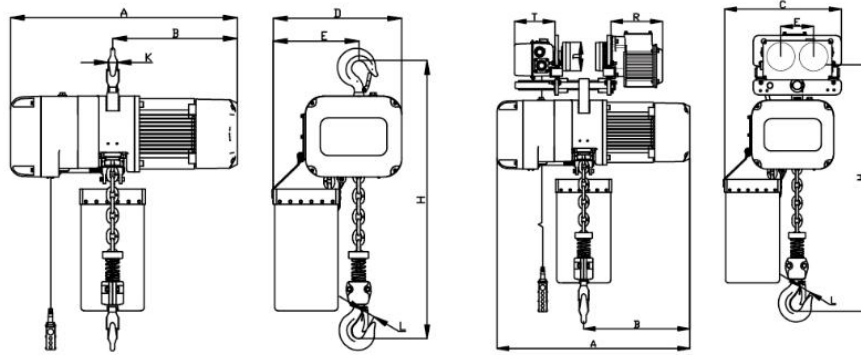

Main dimension(hook suspension)										
Model	Capacity(t)	H(mm)	A(mm)	B(mm)	D(mm)	E(mm)	K(mm)	L(mm)		
SK0.25	0.25	354	475	260	290	190	20	28		
SK0.5	0.5	380	510	265	305	200	20	28		
SK1	1	410	620	326	295	175	20	34		
SK1.5	1.5	615	745	410	370	230	30	40		
SK2-1	2	615	745	410	420	280	30	40		
SK2-2	2	610	620	328	295	210	30	40		
SK2.5	2.5	615	745	410	420	280	35	48		
SK3-1	3	615	745	410	420	280	35	48		
SK3-2	3	820	745	410	420	345	35	48		
SK5	5	845	745	410	420	345	44	48		
Main dimension(with electric trolley)										
Model	Capacity(t)	H(mm)	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	L(mm)	R(mm)	T(mm)
SK0.25	0.25	380	475	260	355	55	111	28	200	156
SK0.5	0.5	400	510	265	355	95	111	28	200	156
SK1	1	430	620	326	350	95	111	34	200	156
SK1.5	1.5	640	745	410	450	110	127	40	200	156
SK2-1	2	640	745	410	450	110	127	40	200	156
SK2-2	2	700	620	328	370	110	127	40	200	156
SK2.5	2.5	650	745	410	450	125	140	48	246	156
SK3-1	3	650	745	410	450	125	140	48	246	156
SK3-2	3	790	745	410	515	125	140	48	246	156
SK5	5	865	745	410	545	140	156	48	246	156