PVC REINFORCED HOSE

ORIENTFLEX
Quality hose serve the world

PVC MINING HOSE

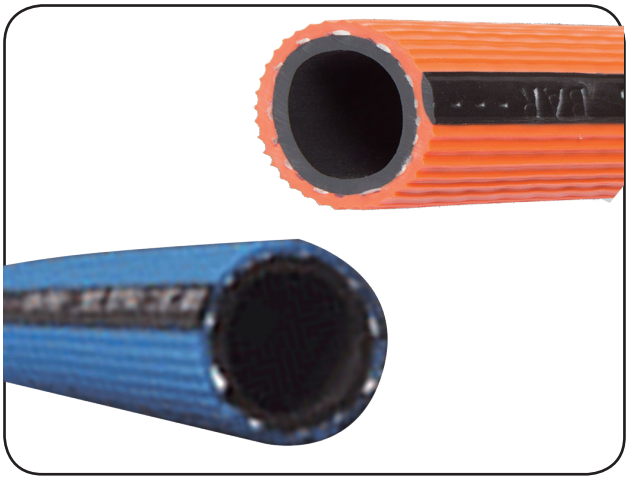

Construction:

Tube: PVC ,Black

Reinforcement: high tensile polyester fibre braiding

Cover: PVC ribbed cover, orange,blue,green.

Application: The pvc mining hose with fire retardant and self-extinguishing properties, is mainly used for air and water service in underground mining operations. It is designed to work in rugged mining conditions and conforms to SANS1086/2007 specifications.

Characteristic:

- Long lasting working life
- Light weight,Flexible,non-kinking
- Cut and abrasion resistant
- Oil resistant and non-absorbent
- Tested for high burst pressure

Temperature: -10℃ (-50 ℉)to + 60°C (+ 140°F)

ORANGE, BLUE MINING HOSE ,STANDARD DUTY

Item Code	I.D		Wall Thickness	W.P		B.P		L	kg	M^3
	inch	mm	mm	psi	bar	psi	bar	m	kg/roll	m^3/roll
PMH-10	3/8	10	2.9	2465	17	9860	68	100	15.39	0.037
PMH-12	1/2	12	3.3	2465	17	9860	68	100	20.77	0.060
PMH-20	3/4	20	3.6	2175	15	8700	60	50	17.47	0.057
PMH-25	1	25	4.1	2000	14	8000	56	50	24.54	0.089
PMH-32	1-1/4	32	4.6	1450	10	5800	40	50	34.63	0.146
PMH-50	2	50	6.8	1270	8.8	5080	35	50	79.44	0.357

GREEN MINING HOSE, HEAVY DUTY

Item Code	I.D		Wall Thickness	W.P		B.P		L	kg	M^3
	inch	mm	mm	psi	bar	psi	bar	m	kg/roll	m^3/roll
PMHG-10	3/8	10	3.1	2465	17	9860	68	100	16.70	0.038
PMHG-12	1/2	12	3.5	2465	17	9860	68	100	22.32	0.062
PMHG-20	3/4	20	4.9	2175	15	8700	60	50	25.09	0.061
PMHG-25	1	25	4.5	2000	14	8000	56	50	27.30	0.093
PMHG-32	1-1/4	32	5.1	1450	10	5800	40	50	38.91	0.148
PMHG-40	1-1/2	40	6.2	1270	8.8	5080	35	50	58.91	0.210
PMHG-50	2	50	7.2	1270	8.8	5080	35	50	84.70	0.361