


Hook suspension electric chain hoist 500kg-5tons

Technical parameters (Single speed/Dual speed)								
Model	Capacity (ton)	Standard lift(m)	Test load(kn)	Motor power(kw)	No.of chain	Dia of chain(m)	Lifting speed(m/min) Single/Dual	Power supply
SY-0.5	0.5	3	6.25	0.75,0.8 /0.27	1	6.3	6.8,6.9/ 2.3	220-690 v 50/60hz 3phase
SY-1.0	1	3	12.5	1.5,1.8/ 0.6	1	7.1	6.6,6.9/ 2.3	
SY-1.0	1	3	12.5	0.75,0.8 /0.27	2	6.3	3.4,3.5/ 1.2	
SY-2.0	2	3	25	3.0,3.1/ 0	1	10	6.6,6.8/ 2.3	
SY-2.0	2	3	25	1.5,1.8/ 0.6	2	7.1	3.3,3.3/ 1.1	
SY-3.0	3	3	37.5	3.0,3.0/ 1.0	1	11.2	5.4,5.4/ 1.8	
SY-3.0	3	3	37.5	3.0,3.0/ 1.0	2	10	4.4,4.5/ 1.5	
SY-5	5	3	62.5	3.0,3.0/ 1.0	2	11.2	2.8,2.7/ 0.9	

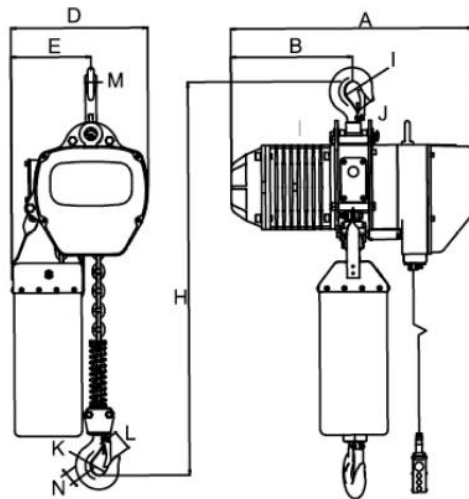

Main Dimension(Single speed/Dual speed)												
Model	Capacity(ton)	H(m)	A(m)	B(m)	D(m)	E(m)	I(m)	J(m)	k(m)	L(m)	M(m)	N(m)
SY-0.5	0.5	530	545	260	280	160	35	28	35	25	17	17
SY-1.0	1	650	582	280	300	176	40	31	40	31	22	22

0												
SY-1. 0	1	650	545	260	280	205	40	31	40	31	22	22
SY-2. 0	2	800	670	313	430	265	47	40	47	38	30	30
SY-2. 0	2	835	582	280	300	236	47	38	47	38	30	30
SY-3. 0	3	845	670	313	430	265	58	47	58	47	36	36
SY-3. 0	3	950	670	313	430	320	58	47	58	47	36	36
SY-5	5	1030	670	313	430	325	60	48	60	48	43	3