



# ND9441P ND9541P

H.265 16-CH/32-CH  
Embedded Plug & Play NVR



H.265/H.264 • 4K Display • 16x PoE Port • 4x HDD • PoE Management • RAID •  
Fisheye Dewarp • Cybersecurity • VIVOCLOUD • Web Plugin Free

VIVOTEK's ND9441P and ND9541P are H.265 Linux-based standalone NVRs with embedded PoE. Equipped for up to 16-CH/32-CH network cameras, the NVRs both support 16x 802.3 at/af PoE ports which feature PoE Management function to help users troubleshoot the physical layer structure. Both also display the PoE power information, providing for a more convenient and smarter installation.

The ND9441P/ND9541P also supports remote and mobile access via VIVOCLOUD and iViewer apps for both iOS and Android handheld devices. The VIVOCLOUD app provides instant push notification and direct video playback functions when triggered by an alarm notification, providing users with a flexible and intelligent NVR for seamless use in small to medium sized video surveillance applications.

With H.265 compression technology and embedded with 4 HDD's providing up to 32TB, the ND9441P/ND9541P offers greater than 30% more recording capacity than H.264 systems. This advancement provides users with more storage space for longer durations of video recording. In addition, the RAID 0/1/5 configurations provide further data security in the rare event of a hard drive failure.

For high-quality and detailed images, the ND9441P/ND9541P supports a maximum network camera resolution of 12-Megapixels. To intelligently manage bandwidth while maintaining this high-quality, the "Auto Adaptive Stream" function will adjust the display resolution automatically for each different layout type. Furthermore, the NVR supports VIVOTEK's fisheye network camera "Fisheye Dewarp" function, which provides multiple de-warping modes in live view and playback, ensuring the correct angle of video view and detailed information for flexible usage. Lastly, to quickly and intuitively find any target event, the ND9441P/ND9541P is equipped with the "Story-Board Search" function, which provides a glimpse of past recordings over an intuitive timeline.

The ND9441P/ND9541P supports HDMI and VGA local video output, so users can control the GUI OSD interface via mouse & keyboard, eliminating the need for a separate PC to search video or playback from the NVR. Additionally, the intuitive and friendly VIVOTEK GUI design gives users a smoother control experience than ever before.


## Key Features

- H.265/H.264 Compression Technology
- 4K Display for Clear Monitoring
- Up to 1080p 16CH Decoding Ability
- Trend Micro IoT Security within Standard Warranty Period
- 802.3at/af Compliant PoE port x 16
- PoE Management
- RAID 0, 1, 5 Supported to Prevent from Recording Data Loss
- Remote Schedule Backup to FTP
- Multiple Browsers Supported: IE, Chrome and Firefox on both Windows & macOS
- Supports VCA Counting Solution

## Highlight Features

### H.265 1080P Real-time Live Display

Featuring a powerful multi-core SoC to provide 1080p (1920x1080) real-time live display so that users will not miss any information during monitoring, the NVRs also provide H.265 and VIVOTEK's Smart Stream technology to help greatly save recording capacity than regular H.264 systems.

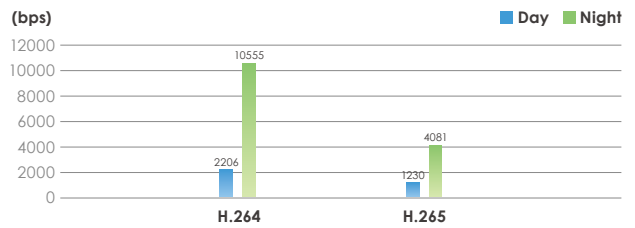

### 4K IP Camera Video Input and 4K Local Video Output


Supporting 4K IP camera video input and 4K local video output, VIVOTEK's NVR can provide users extra high definition video resolution ensuring they will never miss a single detail in both video monitoring and recording.



4K Resolution

### Trend Micro IoT Security

In collaboration with industry-leading cybersecurity software partners, VIVOTEK focuses on making network security products and software that meet industry protocols as well as constantly developing shields to increase your protection from various cyberattacks. By choosing VIVOTEK solutions, users can experience not only high-quality products, but also safer network environments.

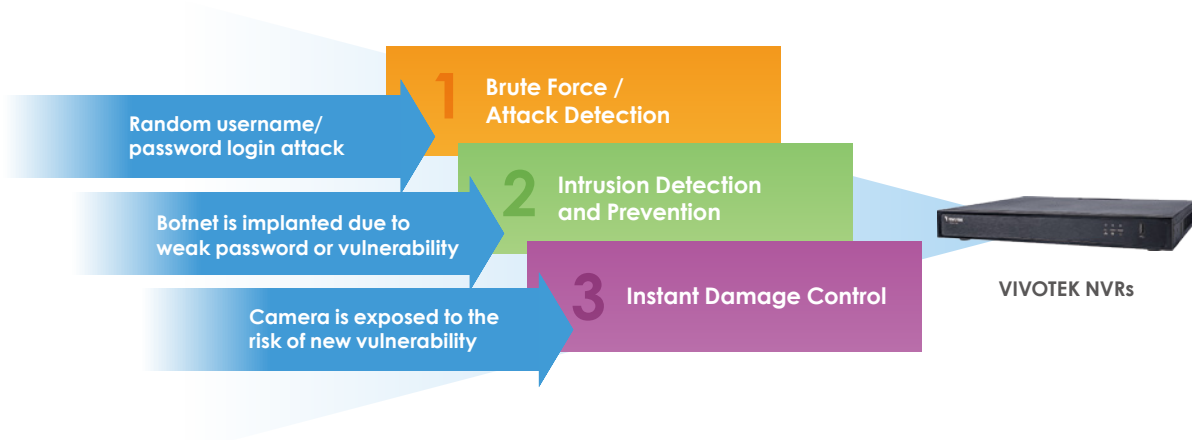

### VCA Counting Solution

The NVR supports VIVOTEK's counting cameras and counting data storage. In local display mode, it can display the counting rule and the detected object information, as well as send that data to VIVOTEK's backend system for counting results analysis.



### Chrome & Firefox Now Supported


Support for plug-in free web browsers enables users with direct web viewing/setting on IE, and now also on Chrome and Firefox web browsers, for both Windows and macOS.



# Highlight Features


## RAID

The RAID 0, 1, 5 configuration provides further data security and reliable video storage. (RAID Max. Volume: 16TB)

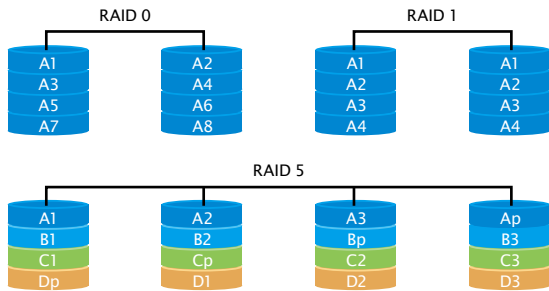


## Story Board Event Search

To quickly and intuitively find any target event, we provide a glimpse of past recording over an intuitive timeline, allowing users to direct playback and archive their video within 10 seconds.

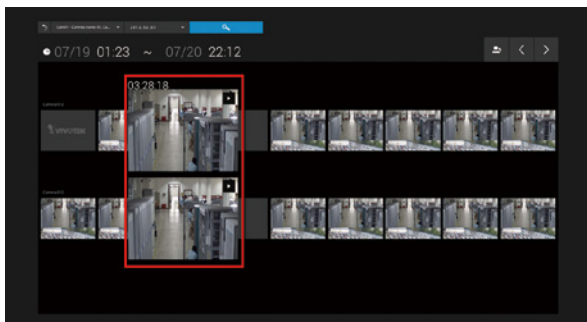


## PoE Management

Both NVRs support 16 x 802.3at/af PoE ports which feature PoE management functions, allowing users to easily troubleshoot problems, control power budget for better operation, and set port priority settings to ensure the most important cameras are always on. When system power is overloaded, the PoE ports will auto-reboot for power supply recovery.

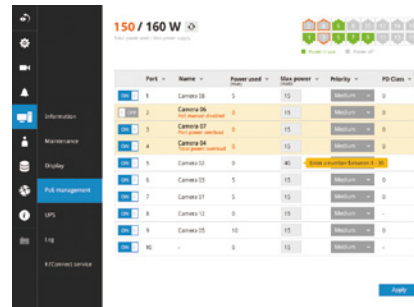

## Fisheye Dewarp

VIVOTEK's NVR offers both LiveView and Playback modes for one fisheye network camera simultaneously. They also provide multiple fisheye de-warp display modes, including 1O, 1P, 1R, 1O3R, 1O8R, allowing users to monitor any angle, or to enjoy precise detailed images for a total surveillance experience.

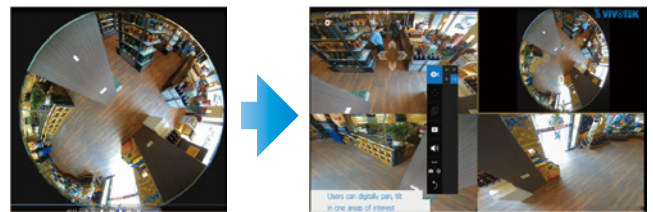

\*Support LiveView and Playback modes

## Product - Order Information


Model	Description	Part Number
ND9441P	H.265, 16CH, 16 PoE, 4HDD NVR	100150900G, US
		100150910G, EU
		100150920G, UK
		100150930G, AU
		100150800G, US
ND9541P	H.265, 32CH, 16 PoE, 4HDD NVR	100150810G, EU
		100150820G, UK
		100150830G, AU
		100150840G, AU

## Accessory - Order Information


Model	Part Number
AM-612: Rack Mount Slide Rails	900030000G

## Mechanical Information

Front View

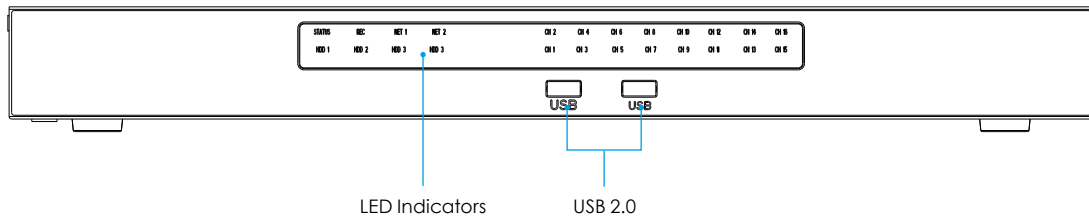

Back View

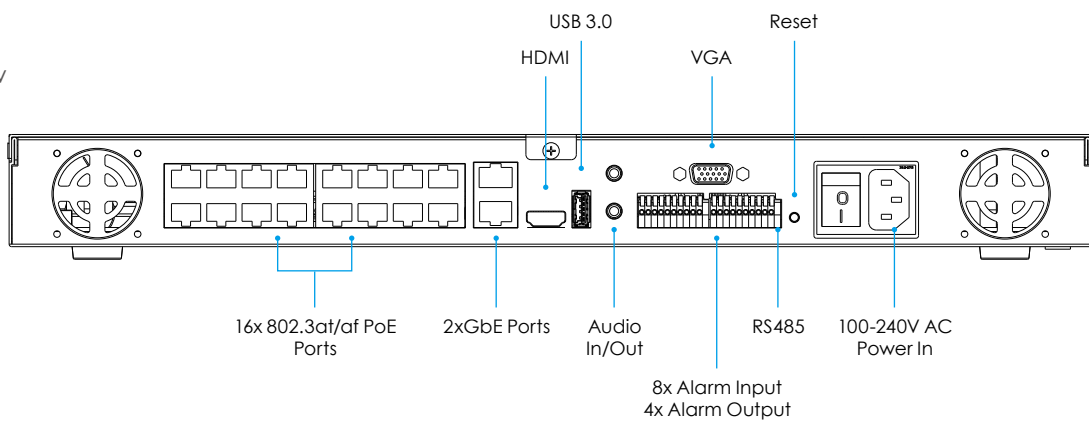

## Technical Specifications

Model	ND9441P H.265 16-CH Embedded Plug & Play NVR	ND9541P H.265 32-CH Embedded Plug & Play NVR
<b>Device</b>		
OS	Embedded Linux	
CPU	ARM Processor	
Flash	256 MB	
RAM	2 GB	4 GB
Watchdog	Hardware + Software	
Power Restoration	System Restart Automatically after Power Recovery	
<b>Local Display</b>		
LiveView Display	16 Channels Multi Layout Display: 1x1, 2x2, 3x3, 1P+3,2P+3,1M+5, 1P+6, 3V,1M+12, 4x4	32 Channels Multi Layout Display: 1x1, 2x2, 3x3, 1P+3,2P+3,1M+5, 1P+6, 3V,1M+12, 4x4, 1M+3I
Video Output	HDMI x1, VGA x1	
Display Resolution	3840x2160, 1920x1080, 1280x720	
Camera Position	Change the viewcell position on the Live View screens	
Stream Application	Constant\Auto Adaptive Stream	
Monitor Enhancement	OSD Display (NVR), OSD Display (Camera), Camera Information, Remote I/O Control, Event Notification, Aspect Ratio	
Fisheye Dewarp	1O,1P,1R,1O3R,1O8R	
PTZ Operation	Direction Control, Home, Iris, Preset, Patrol (Group), PIP Control	
<b>Video</b>		
Video Format	MJPEG, H.264, H.265	
Graphic Decoder	Hardware decoding	
Decoding Resolution	Up to 4096x4096 (H.265) 8192x8192 (H.264)	
Decoding Capability	H.265/H.264: 3840x2160 @ 120 fps (4-CH) 1920x1080 @ 480 fps (16-CH)	
<b>Audio</b>		
Audio Format	G.711, G.726	
Audio In/Out	3.5 Phone Jack Audio Output x1 3.5 Phone Jack Audio Input (Reserved) x1	
<b>Record</b>		
Recording Time (sec.)	Pre-Record: 5 (Max. 10) Post-Record: 20 (Max. 300)	
Recording Stream	Single	
Recording Throughput	192 Mbps	
Recording Mode	Continuous, Schedule, Manual, Event, Activity Adaptive Streaming	
Recording Setting	Recycle (unit: Day)	
Watermark	Supported	
<b>Storage &amp; Backup</b>		
HDD Devices	Internal x4 (3.5")	
HDD Max. Capacity	8 TB	
RAID	RAID 0, 1, 5	
Disk Management	Create, Format and Remove Disk HDD S.M.A.R.T	
Manual Backup	USB Dongle (FAT Format)	
Schedule Backup	FTP	

## Technical Specifications

Model	ND9441P H.265 16-CH Embedded Plug & Play NVR	ND9541P H.265 32-CH Embedded Plug & Play NVR
<b>Playback</b>		
Playback Display	4 Channels Multi Layout Display: 1x1,2x2,1P+3,1V+3	
Playback Control	Regular (Play, Pause, Stop), Rewind, Next / Previous Frame, Speed Control, Calendar, Event, Timeline, Timeline Scale, Thumbnail (Storyboard)	
Video Search	By Calendar, Date/Time, and Alarm	
Thumbnail Explorer (Storyboard)	Listing the thumbnail of recorded video (Max. 2 CH)	
Snapshot	JPEG	
Video Clip Export	EXE	
<b>Network</b>		
Ethernet	10/100/1000Mbps Ethernet (RJ-45) x 2	
Video Throughput for Remote Client	96 Mbps	
PoE	802.3at/af Compliant PoE Ports x 16 (Total Max. 160W)	
PoE Management	Supported	
Protocols	IPv4, TCP/IP, HTTP, HTTPS, UPnP, RTSP/RTP/RTCP, SMTP, FTP, DHCP, NTP, DNS, DDNS, IP Filter	
<b>External Interface</b>		
USB	Front: 2 (USB 2.0) Back: 1 (USB 3.0)	
Alarm In	8	
Alarm Out	4	
Audio	3.5 Phone Jack Audio Output x1 3.5 Phone Jack Audio Input (Reserved) x1	
RS485	1 Port (Reserved)	
<b>System</b>		
POS Integration	Supported (*by project)	
UPS Integration	Supported (*by project)	
Camera Integration	ONVIF Profile S	
Event	Motion Detection, PIR Detection, Tampering Detection, Camera DI/DO, Camera Disconnected, Disk Failure, Disk Full, NVR DI/DO	
Event Action	Record, Email (Text), Email (Snapshot), FTP, Buzzer, ePTZ Control (Go to Preset), NVR DO, Camera DO, VIVOCLOUD APP Notification	
User Management	User level: administrator, regular user	
Log	System, Recording, User, Error	
Date&Time	Time Zone, Manual, Automatic Sync NTP, Daylight Saving Time	
Language(*)	Czech, English, French, German, Italian, Japanese, Korean, Portuguese, Polish, Russian, Spanish, Simplified Chinese, Traditional Chinese	
<b>Advance Features</b>		
VCA Counting Solution	Supported	
<b>Remote Client</b>		
Software AP	Shepherd ,VAST 2	
Mobile/Tablet App	iViewer (Android & iOS)	
Web Browser	Internet Explorer 10 (32 bit) or above/ Windows Chrome v68.0.3 & Firefox v61.02 or above/ Windows & macOS	
VIVOCLOUD	Supported	
<b>General</b>		
Power Input	100-240V AC, 50/60Hz	

## Technical Specifications

Model	ND9441P H.265 16-CH Embedded Plug & Play NVR	ND9541P H.265 32-CH Embedded Plug & Play NVR
Power Consumption	Max. 260 W	
Dimensions	430 (W) x 400 (D) x 44.5 (H) mm	
Weight	4.5 kg (without HDD)	
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)	
Humidity	0 ~ 95%	
Safety Certifications	CE, LVD, FCC, VCCI, C-Tick, UL	

### Dimensions

