


## WATER DISCHARGE HOSE 300PSI

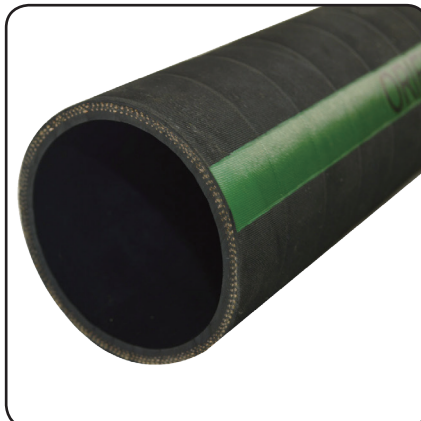

### Construction:

Tube:Black,smooth,NR,SBR rubber compound.

Reinforcement:Multi plies high strength synthetic fibre

Cover:Black,smooth,cloth impression, SBR rubber compound,

### Application:

Designed for water and non-corrosive fluids used in construction ,mines and light duty industrial.

### Temperature:

-40°C (-104 °F )to+70°C (+158 °F)

### Characteristics:

- Weathering and ozone resistant.
- Flexible and high working pressure
- Excellent for tough working conditions

Item Code	I.D		O.D	W.P		B.P		L	
	inch	mm	mm	bar	psi	bar	psi	m	ft
WDH2-005	3/16"	4.8	12	20	300	60	900	100	330
WDH2-006	1/4"	6.4	13	20	300	60	900	100	330
WDH2-008	5/16"	7.9	15	20	300	60	900	100	330
WDH2-009	3/8"	9.5	16	20	300	60	900	100	330
WDH2-012	1/2"	12.7	22	20	300	60	900	100	330
WDH2-016	5/8"	15.9	26	20	300	60	900	100	330
WDH2-019	3/4"	19.1	29	20	300	60	900	100	330
WDH2-025	1"	25.4	36	20	300	60	900	100	330
WDH2-032	1-1/4"	31.8	44	17	250	51	750	60	200
WDH2-038	1-1/2"	38.1	51	17	250	51	750	60	200
WDH2-050	2"	50.8	65	17	250	51	750	60	200
WDH2-063	2-1/2"	63.5	78	17	250	51	750	60	200
WDH2-076	3"	76.2	91	17	250	51	750	60	200
WDH2-089	3-1/2"	88.9	108	17	250	51	750	60	200
WDH2-102	4"	101.6	120	17	250	51	750	60	200
WDH2-127	5"	127	148	17	250	51	750	30	100
WDH2-152	6"	152.4	173	17	250	51	750	30	100
WDH2-203	8"	203.2	228	17	250	51	750	30	100
WDH2-254	10"	254	280	17	250	51	750	12	40
WDH2-304	12"	304.8	330	17	250	51	750	12	40