

QUEEN

50Hz@1500RPM 400/230V 3PH - MINING SPEC

GENMAC
POWER PRODUCTS


Standard Composition:

Control Panel:

Self-standing internal tower panel IP65 inside canopy
Comap controller AMF25 and electronic battery charger
Analogic fuel level gauge
Adjustable Earth Fault Breaker (RCD)
Dedicated area for cable entrance

Structure:


270L integrated Bunded tank + containment up to 110% of total liquids
Fuel tank cap with lock
Central lifting hook
Bilateral forklift pockets
Galvanized steel canopy with powder coated paint
Exhaust manifold insulation jacket
Lockable battery switch
3 way valve
Quick coupling (1/4") for external tank
Quick coupling for oil discharge
Ground rod
Doors earthing

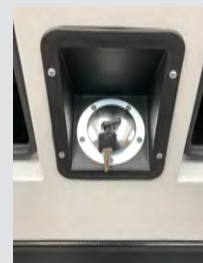

Structure Details:



100% recyclable, Class 1, fireproof foam, mechanically fixed - no glue.

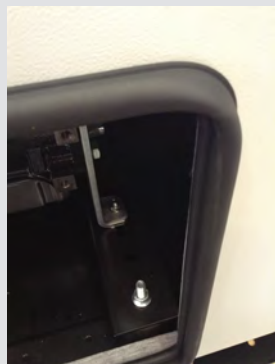

Automotive gaskets seal doors



Bunded tank 110%




Coolant Drain tap



Modular canopy



Drain plug

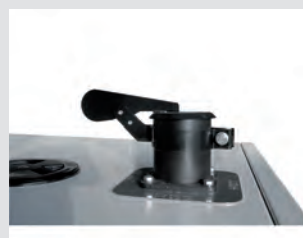

Rain cap



External Emergency Stop Button

Optional:



Cyclon Air Prefilter



Skid base



Automatic Refueling Kit