



爱协林热处理多用炉 Heat Treatment Multi-purpose Chamber Furnace



数控立式磨床 CNC Vertical Milling Machine



数控立式磨床 CNC Vertical Milling Machine



枪炮钻 CNC Drilling Machine



数控立式车床 CNC Vertical Lathe



数控卧式磨床 CNC Horizontal Milling Machine



-190°超低温深冷设备
-190° Ultra Low-Temp Cryogenic Equipment



斗山斜轨数控车床 Doosan Inclined CNC Lathe



斗山卧式加工中心 Doosan Horizontal Machining Center



Zhengzhou Hanyun Construction Machinery Co., Ltd
Hydraulic breaker full industry chain production

BOX TYPE SILENCED BREAKER




TOP TYPE BREAKER



SIDE TYPE BREAKER




BREAKER MAIN PARTS

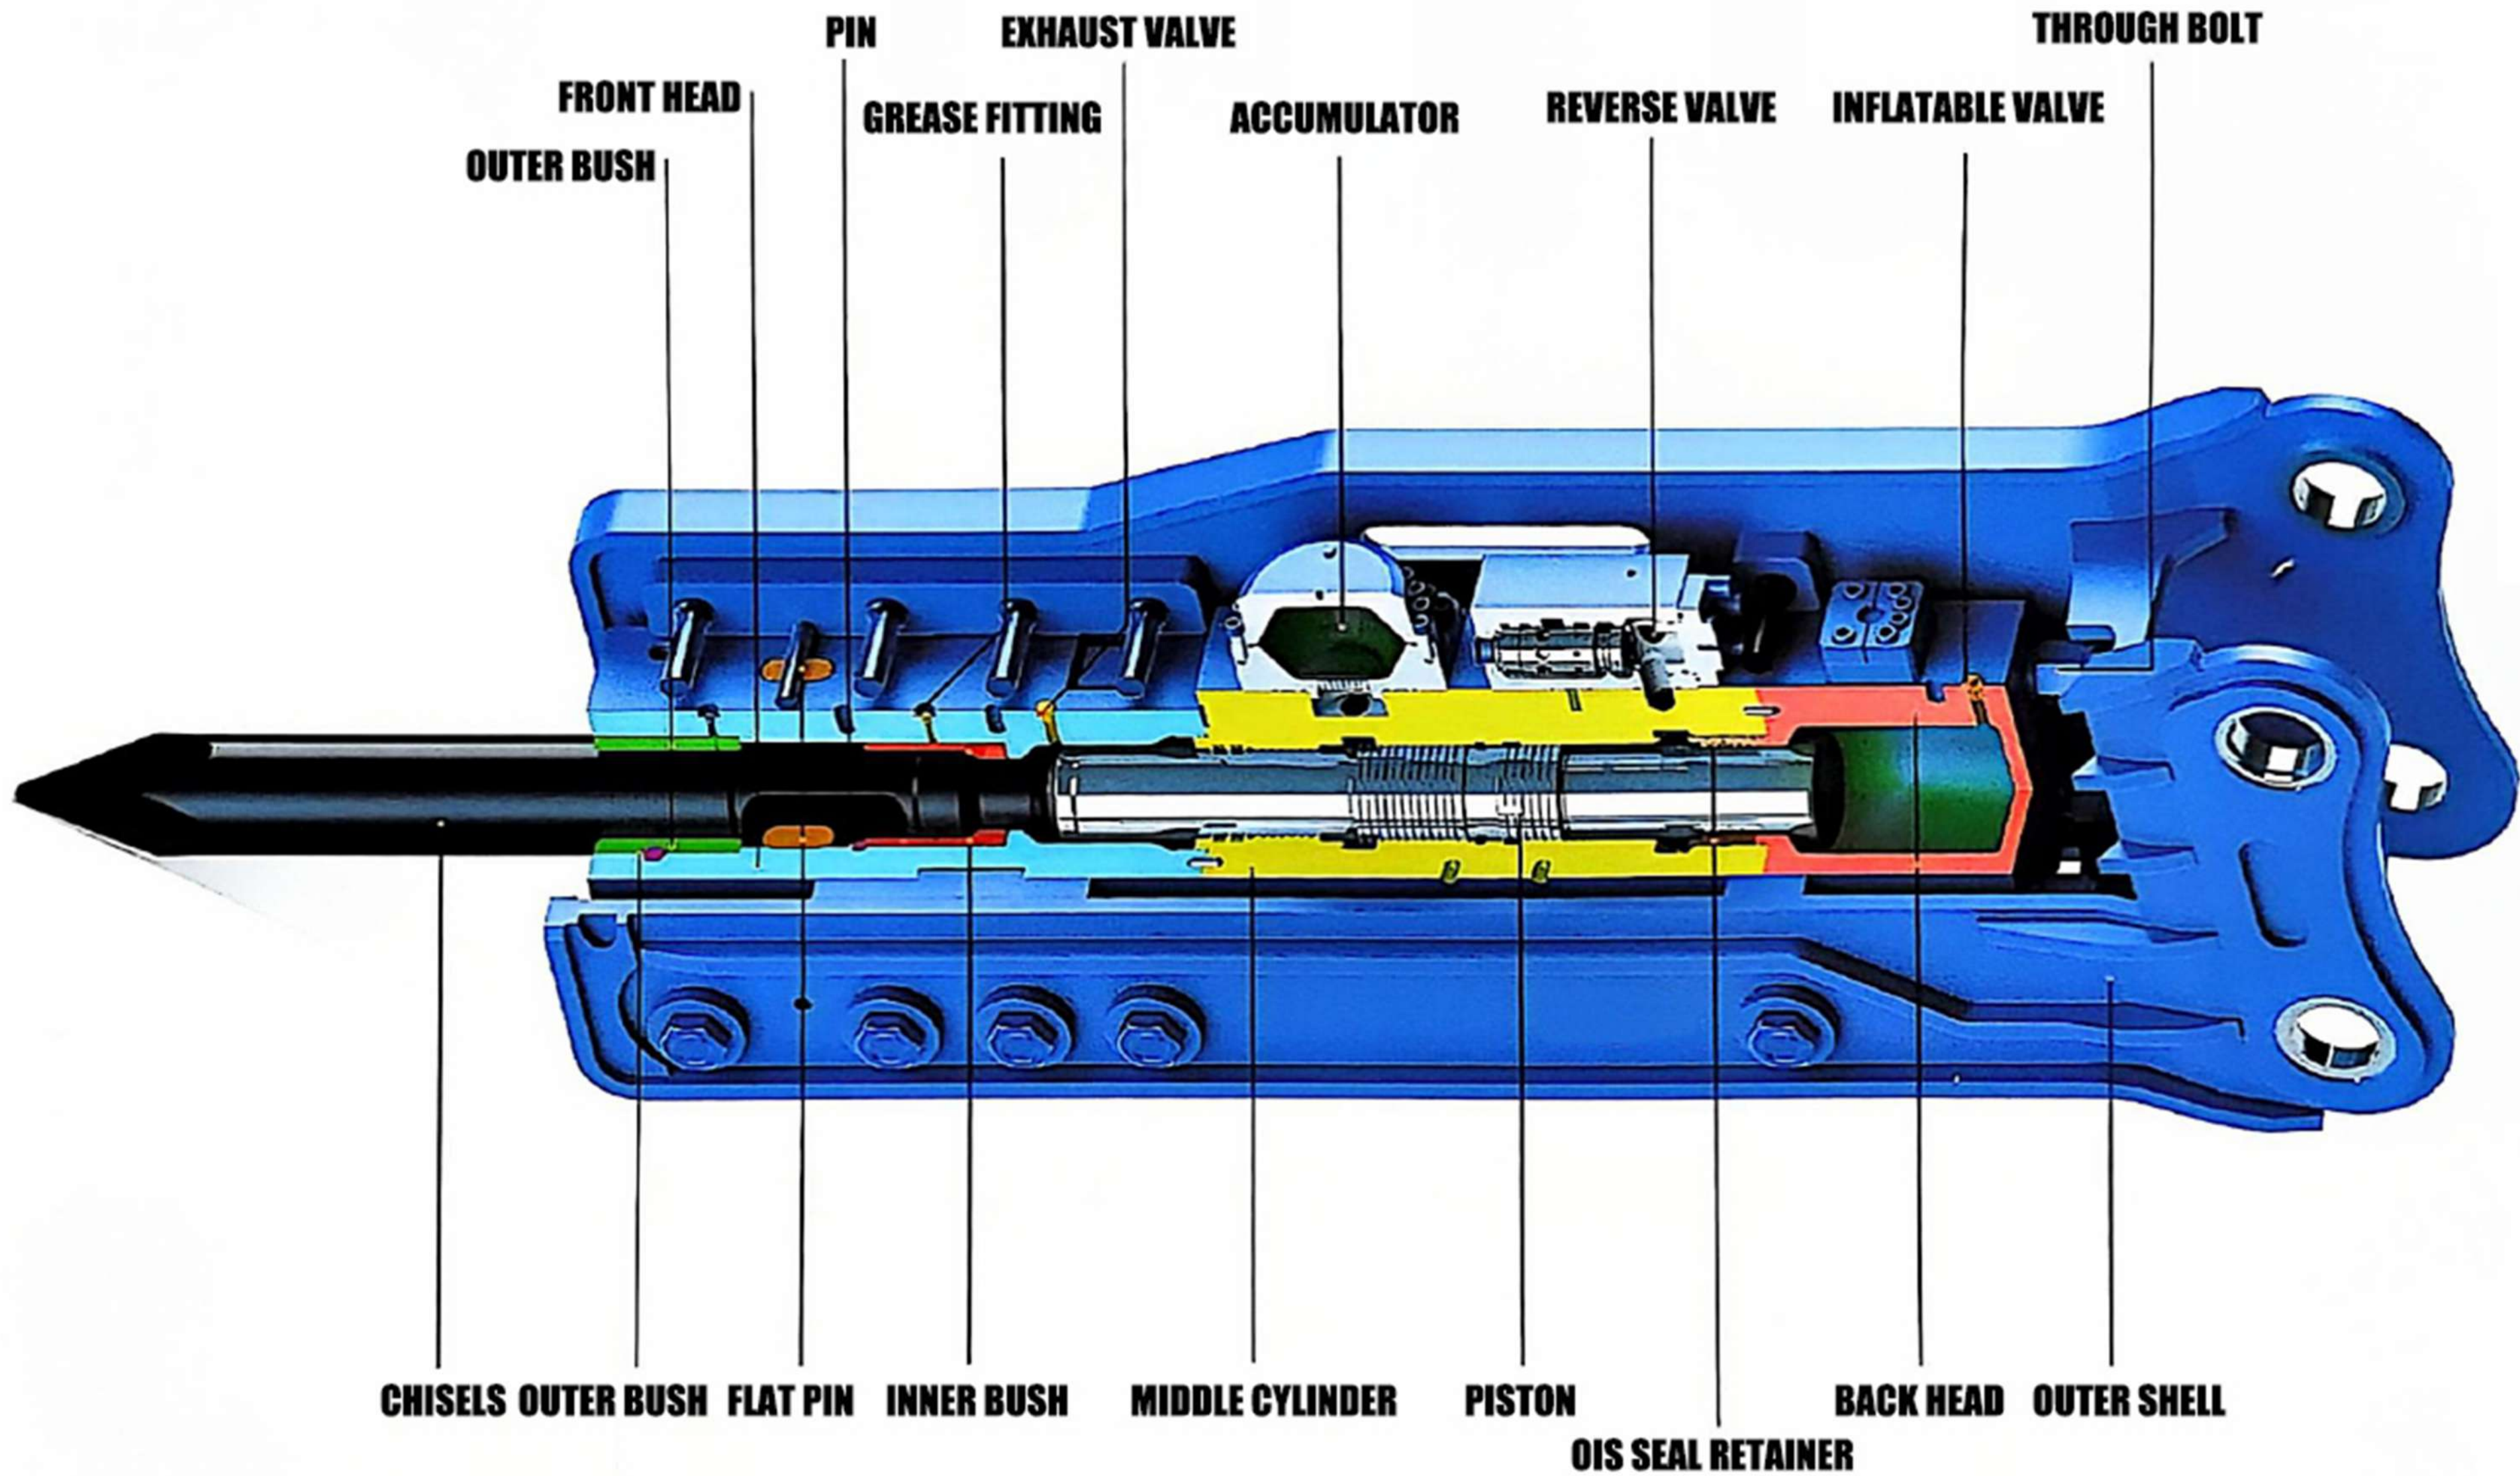

规格 SPECIFICATIONS		名称 NAME	HY400	HY450	HY530	HY680	HY750	HY850	HY1000	HY1200	HY1250	HY1350	HY1400
总重量 TOTAL WEIGHT	三角型 TRIANGULAR TYPE	kg	70	95	158	263	334	493	736	1374	1484	1653	1774
	直型 SIDE TOP	kg	72	95	158	343	409	591	880	1420	1587	1847	2059
	静音型 SLIENCE	kg	102	129	180	361	450	648	917	1358	1415	1893	2011
钎杆直径 DIAMETER OF TOOL		mm	40	45	53	68	75	85	100	120	125	135	140
钎杆重量 WEIGHT OF TOOL		kg	4	8	9	18	22	29	57	89	94	115	135
液压油压力 OPERATING PRESSURE		bar	90-120	90-120	90-120	110-140	120-150	130-160	150-170	150-170	150-170	160-180	160-180
液压油流量 HYDRAULIC FLOW RANGE		1/min	15-25	20-30	25-50	40-70	50-90	60-100	80-110	90-120	90-120	130-150	120-180
打击频率 IMPACT FREQUENCY		bpm	800-1400	700-1200	600-1100	500-900	400-800	400-800	350-700	350-650	350-650	400-600	350-500
配用车重 SUITABLE CARRIER		ton	0.8-2.5	1.2-3.0	2.5-4.5	4-7	6-9	7-14	10-15	15-18	15-18	18-26	18-26

规格 SPECIFICATIONS		名称 NAME	HY1500	HY1550	HY1600	HY1650A	HY1650B	HY1750	HY1850	HY1950	HY2000	HY2050	HY2100	HY2300
总重量 TOTAL WEIGHT	三角型 TRIANGULAR TYPE	kg	2281	2577	3075	2751	3277	3905	4365	4841	5800	6623	7300	8000
	直型 SIDE TOP	kg	2380	2745	3007	3156	3447	4057	4844	5374	--	--	--	--
	静音型 SLIENCE	kg	2457	2968	2791	2916	2925	3902	--	--	--	--	--	--
钎杆直径 DIAMETER OF TOOL		mm	150	155	160	165	165	175	185	195	200	205	210	230
钎杆重量 WEIGHT OF TOOL		kg	164	183	200	224	215	247	269	302	321	340	362	465
液压油压力 OPERATING PRESSURE		bar	160-180	160-180	160-180	160-180	170-200	260-270	270-280	270-280	270-280	270-280	280-290	280-290
液压油流量 HYDRAULIC FIOW RANGE		1/min	150-190	180-240	200-260	200-260	200-260	250-300	220-290	250-320	250-320	250-320	280-350	310-380
打击频率 IMPACT FREQUENCY		bpm	350-700	300-450	250-400	250-400	250-400	200-300	150-250	150-250	150-250	150-250	100-200	100-200
配用车重 SUITABLE CARRIER		ton	27-35	28-35	30-40	30-40	30-40	45-50	45-50	50-60	50-60	55-65	65-75	70-80

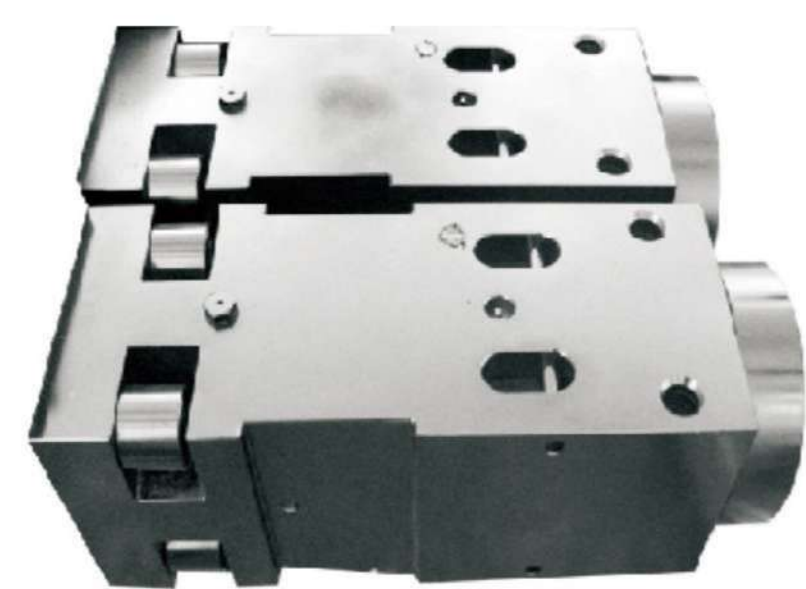

前缸体
Front Head



中缸总成
Cylinder Assy



氮气室
Back Head



换向阀
Valve



活塞
Piston



油封
Seal



活塞环
Oil Seal Retainer



蓄能器
Accumulator



皮碗
Diaphragm



氮气瓶
Gas Cylinder



氮气表
Gas Charging Kit



扁销
Tool Pin



外导向套
Outer Bush



内导向套
Inner Bush



通体螺栓
Through Bolt




壳体螺丝
Side Bolt



钎杆
Tool



管路
Pipeline

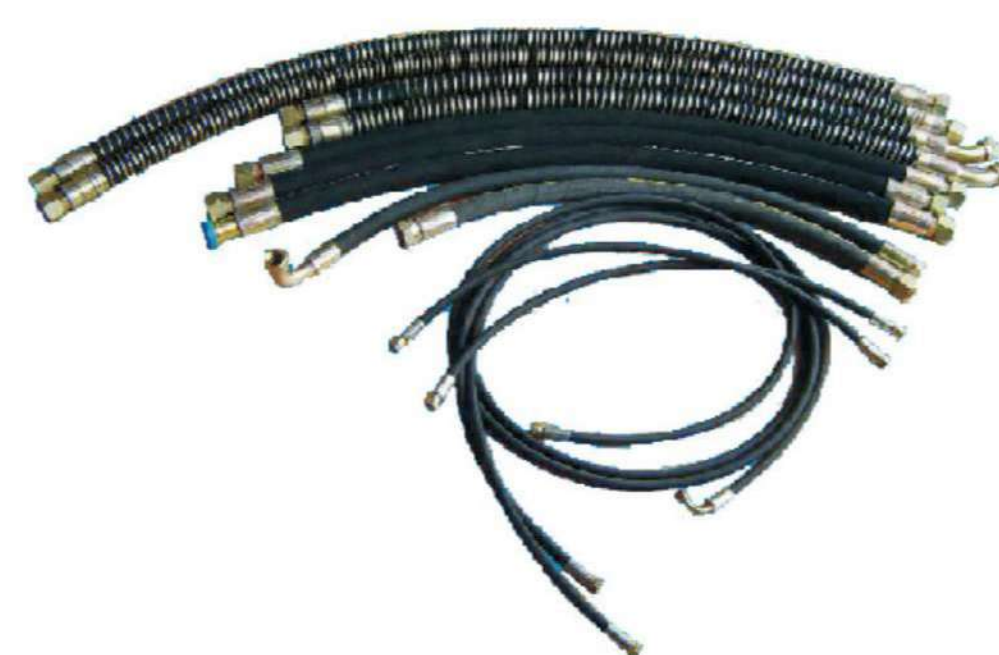

锤头管
Rubber Hose

破碎锤钎杆 High Quality Tools

破碎锤钎杆可以是标准的，也可以定做，用户可以决定破碎锤钎杆的长度、硬度和形状。

Standard chisels and customerized ones are both available. Chisels' length, hardness & type can be tailor-made to satisfy different clients' requirements.




尖头 Moil Point



这个工具是适当的破碎大块物料和混凝土。

Moil point goes through quickly. Used for breaking oversize objects and concrete.

铲头 Flat Wedge

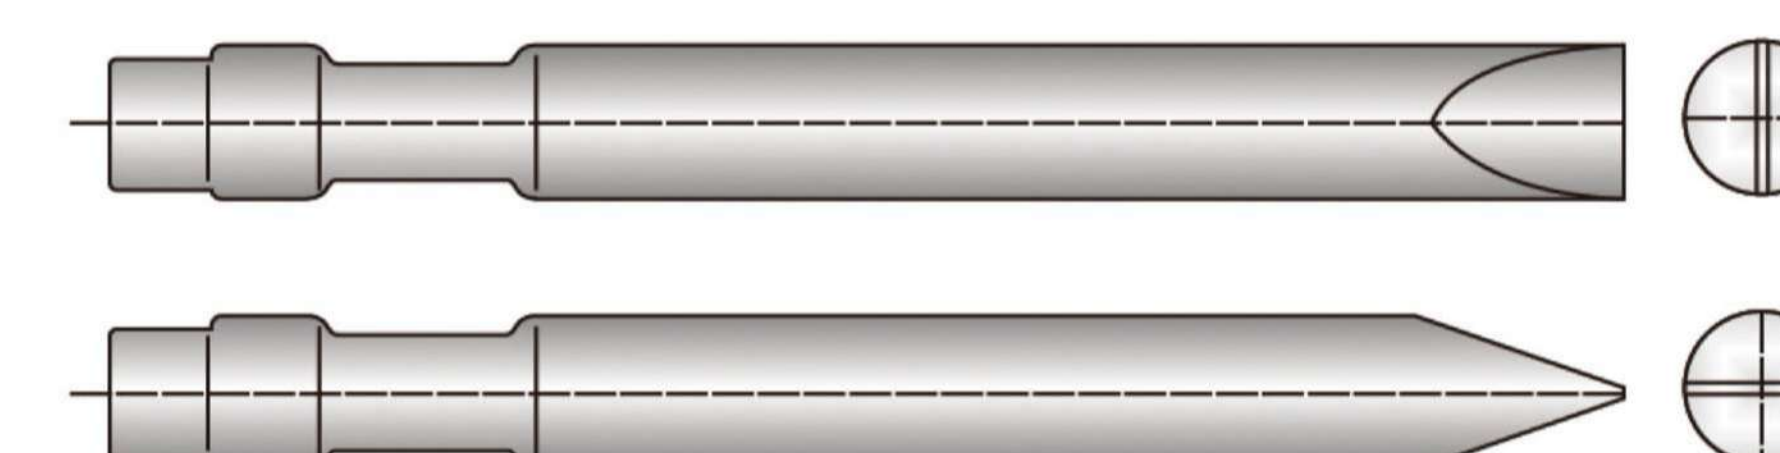

这个工具是适用于特殊的破碎工作时。
Used for special breaking jobs, during which accurate breaking is not required.

球头 Blunt



拆迁工作，一般的拆除作业。
Used for most demolition jobs.

破碎锤钎杆 High Quality Tools

型号Model	40	45	53	68	70	75	85	100	125	135	140	150	155	165	175	190	195	200	205	210	230	255
项目Item	40	45	53	68	70	75	85	100	125	135	140	150	155	165	175	190	195	200	205	210	230	255
钎杆直径 Chisel Dia(ø)	40	45	53	68	70	75	85	100	125	135	140	150	155	165	175	190	195	200	205	210	230	255
长度 Length(mm)	450	500	600	700	700	750	850	1000	1200	1300	1300	1500	1500	1500	1600	1700	1700	1700	1800	1800	1800	1800

WhatsApp/WeChat +8619003835319