



DATALINK
TECHNOLOGIES


**Streamax
Australia**

MOBILE CCTV SURVEILLANCE SYSTEMS





Introduction

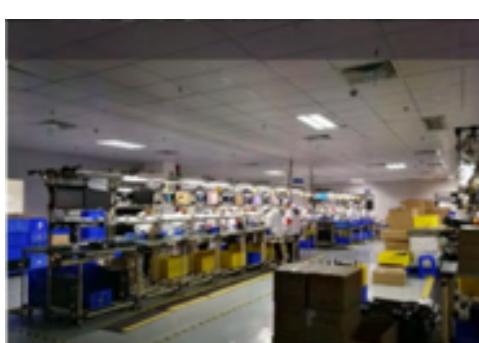

A Humble Beginning

Streamax Technology is a leading mobile surveillance solution provider with global perspective. Founded in 2002 and strongly committed to competitive mobile surveillance, Streamax continues to create maximum value for international end users, as well as distribution and installation companies. Building on the intelligence of 300 dedicated engineers, the company has become a leader in technology innovation - along our recent history, Streamax has received over 100 exclusive patents, as well as a large number of awards.

What We Offer

Streamax Australia has been a market leader in the Mobile Digital Video Recording (MDVR) industry in Australia for many years. We pride ourselves on our technical resources and after sales service. We aim to provide an efficient, effective and informative service to all our customers.

Our products and services offer solutions to suit the needs from the smallest to largest of fleet operators.

Why Streamax?

Streamax isn't just about providing quality products, it's about empowering our customers with affordable solutions that can help them better manage both their vehicle fleet and their drivers while providing peace of mind knowing that their investments are being watched.



Vehicle Video Recorder Series

X3N-H0404



Features

- 1 4 channels AHD + 4 channel IPC
- 2 Supports HDD/SSD for main recording
- 3 Supports SD card for mirror recording
- 4 Supports GPS for location tracking
- 5 Supports WIFI for video files download optional
- 6 Optional Built-in 4G for live view and remote management
- 7 H265 file compression/decompression

X5N-E0804



Features

- 1 8 channels AHD + 4 channel IPC
- 2 Modular design for easy maintenance
- 3 Revolutionary anti-vibration technology for 360 degree installation
- 4 Supports 2.5" HDD/SSD storage and SD card for mirror recording
- 5 Dual streams for local recording and wireless transmission
- 6 Built-in 4G for live view and remote management optional
- 7 Internal GPS for location tracking
- 8 H265 file compression/decompression



X7N PRO-H0416

Features

- 1 Supports 4 channels AHD + 16 channels IPC
- 2 Supports 3.5" HDD/SSD for main recording
- 3 Supports SD card for mirror recording
- 4 Supports GPS for location tracking
- 5 Supports WIFI for video files download optional
- 6 Built-in 4G for live view and remote management optional
- 7 HD VGA output
- 8 H265 file compression/decompression



ADPLUS



Features

- 1 2 or 3 channel options including driver safety monitoring and ADAS
- 2 Supports 4G, Bluetooth, WIFI, 6 axis and other functions
- 3 Front facing dashcam
- 4 Dual SD card video storage
- 5 Compact size & light weight.
- 6 Mounts to the glass under the rearview mirror
- 7 H265 file compression/decompression

X1N-H0401



Features

- 1 4 channels FULL HD+1 channel
- 2 Supports HDD/SSD for main recording
- 3 Supports SD card for mirror recording
- 4 Supports GPS for location tracking
- 5 Supports WIFI for video files download optional
- 6 Built-in 4G for live view and remote management optional
- 7 H265 file compression/decompression

X1N-N0400



Features

- 1 4 channels IPC
- 2 Supports HDD/SSD for main recording
- 3 Supports 360 degree anti-vibration
- 4 Supports GPS for location tracking
- 5 Supports WIFI for video files download optional
- 6 Optional Built-in 4G for live viewing and remote management
- 7 H265 file compression/decompression



M1N-TKH0401



Features

- 1 4 channels FULL HD+1 channel 1080P
- 2 Supports dual SD cards for main recording
- 3 Supports 360 degree anti-vibration
- 4 Supports GPS for location tracking
- 5 Supports WIFI for video files download optional
- 6 Optional Built-in 4G for live viewing and remote management
- 7 H265 file compression/decompression

CEIBA III Back To Base Monitoring & Reporting

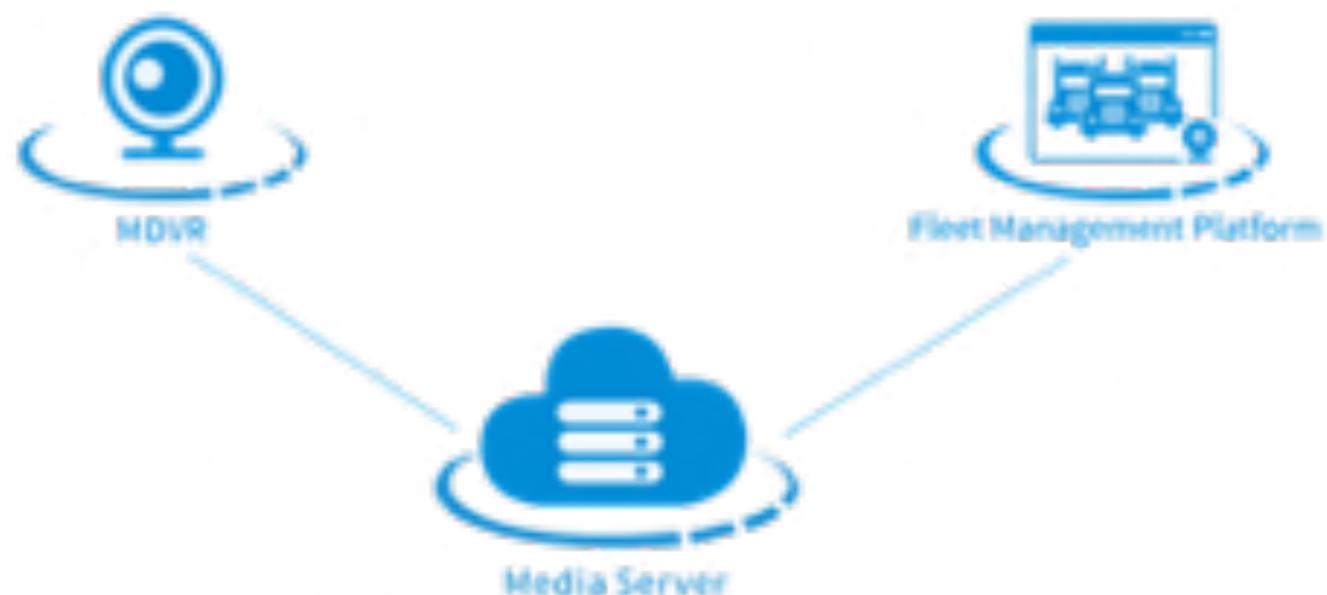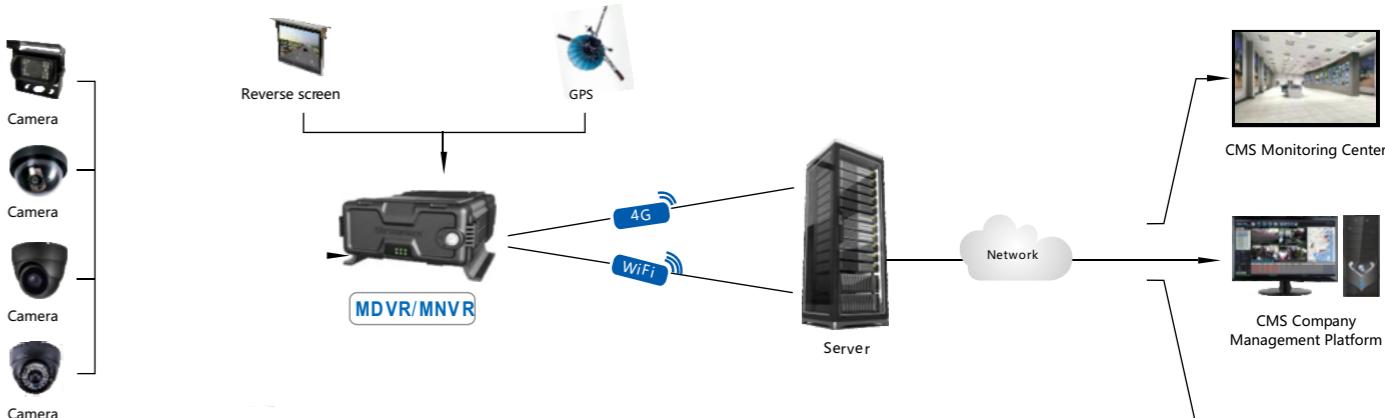

Central Hosting Subscription Local Hosting Software Licensing



VEHICLE CAMERAS



SA-2035-13IP

Dome view Camera
IP68 Waterproof & Vandalproof
5 leds, fixed lens 2.1 mm/140degree
145 Degree view angle
Dimension:60 X60X50mm
Dome view Camera
IP68 Waterproof & Vandalproof
5 leds, fixed lens 2.1 mm/140degree
145 Degree view angle
Dimension:60 X60X50mm



SA-2095-13IP

Mini Front view AHD Camera
2.1 mm megapixel lens
145 Degree view angle
Dimension:68X62X55 mm



SA-2105-13IP

2.1mm megapixel lens
IP69 waterproof
2.1mm megapixel lens/
145 Degree view angle
Dimension: 112.5 x 80.3 x 50mm



VEHICLE CAMERAS



SA-2475-13IP

POE 1080P 960P 720P IP Truck Fleet Rear View camera ;
H.264 Main Profile,AVI Base Line.
Main Stream:HD 1920*1080 1-25 fps
2.0 Mega Pixel 1080P,1920X1080P ;1.3Megapixel 720P
,1280X720P.
18pcs IR LED, IR distance: 15m;
Megapixel Lens: 2.8mm/3.6mm.
Audio: Without audio/With Audio Optional;
Waterproof Rate: IP69.



SA-2735-13IP

POE Heavy IP69 IR Truck Fleet Bus IP Side View Camera;
H.264 Main Profile,AVI Base Line.
Main Stream:HD 1920*1080 1-25 fps
2.0 Mega Pixel 1080P,1920X1080P ;1.3Megapixel 720P
,1280X720P.
12pcs IR LED, IR distance: 10m;
Megapixel Lens: 2.8mm/3.6mm.
Waterproof RJ45 port POE Connector
Audio: Without audio
Waterproof Rate: IP69.



SA-2845-13IP

POE Heavy IP69 IR Vehicle
IP Side View Camera;
H.264 Main Profile,AVI Base Line.
Main Stream:HD 1920*1080 1-25 fps
2.0 Mega Pixel 1080P,1920X1080P ;
1.3Megapixel 720P,1280X720P.
10pcs IR LED, IR distance: 10m;
Megapixel Lens: 2.8mm/3.6mm.
Audio: Without audio;
Waterproof Rate: IP69.



SA-2485-13IP

Outdoo,IR IP Vehicle Heavy-Duty Camera
2.0 Mega Pixel1080P ,1920X1080P
Video Compression: H.264 Main Profile;
AVI Baseline
Main Stream: HD 1920*1080P 1-20fps
H.264 Compression Plug & Play
P2P Support Mobile Remote Viewing
Support ONVIF2.0/2.2/2.3/2.4
12pcs IR LED, IR distance: 10m-15m
Megapixel Lens: 2.8mm/3.6mm /6mm/8mm.
Audio:With Audio/without Audio optional)



SA-2835-13IP

Out door IR IP Vehicle Heavy-Duty Camera:
1.0/2.0 Mega Pixel 720P/1080P ,1280X720P/1920X1080P.
Video Compression: H.264 Main Profile; AVI Baseline.
Main Stream: HD 1920*1080P 1-25fps.
H.264 Compression Plug & Play,P2P Support Mobile Remote
Viewing.
Support ONVIF2.0/2.2/2.3/2.4.
10pcs IR LED, IR distance: 10m-15m.
Megapixel Lens: 2.8mm/3.6mm /6mm/8mm.



SA-2335-13IP

Dome view Camera
IP66 Vandalproof
12 leds,
fixed lens 1.8mm/2.1mm
170/140 view degree
Dimension:104 X104X55mm



SA-2585-13IP

Resolution: 1920x1080@60fps
1/2.8 CMOS
Face recognition under varied light conditions
Compact size, light weight
Anti-vibration, vandal resistant
Auto shutter speed, white balance, contrast,
brightness, saturation, etc
excellent color reproduction



SA-2375-13IP

Resolution: 1920x1080@30fps
1/2.8 CMOS
Supports D-WDR, white balance, gain control
Compact size, light weight
Anti-vibration, vandal resistant
IP69K, Ip67
excellent color reproduction



SA-2605-13IP

Resolution: 1920x1080@30fps
1/2.9 CMOS
Supports D-WDR, white balance,
gain control
Compact size, light weight
Anti-vibration, vandal resistant
IP66(Without audio),
IP65(With audio)
excellent color reproduction



SA-2155-13IP

Out door IR IP Vehicle Heavy-Duty Camera.
1.0/2.0 Mega Pixel 720P/1080P ,1280X720P/1920X1080P.
Video Compression: H.264 Main Profile; AVI Baseline.
Main Stream: HD 1920*1080P 1-25fps.
H.264 Compression Plug & Play,P2P Support Mobile Remote
Viewing.
Support ONVIF2.0/2.2/2.3/2.4.
10pcs IR LED, IR distance: 10m-15m.



SA-2525-13IP

Indoor IR IP Vehicle Heavy-Duty Camera
1.0/2.0 Mega Pixel 720P/1080P ,1280X720P/1920X1080P
Video Compression: H.264 Main Profile; AVI Baseline
Main Stream: HD 1920*1080P 1-25fps
H.264 Compression Plug & Play,P2P Support Mobile Remote
Viewing
Support ONVIF
12pcs IR LED, IR distance: 10m-15m



SA-2295-13IP

Indoor IR IP Vehicle Car
Front View Camera
1.0/2.0 Mega Pixel 720P/1080P ,1280X720P/1920X1080P
Video Compression:
H.264 Main Profile; AVI Baseline
Main Stream: HD 1920*1080P 1-25fps
H.264 Compression Plug & Play,
P2P Support Mobile Remote Viewing
Support ONVIF
NO IR



SA-2925-13IP

Resolution: 1280x720@30fps
1/3 CMOS SONY IMX238
Day/Night(ICR), Digital Noise Filter, Super Wide Dynamic
Range
Perfect solutions for vehicles
Anti-vibration, vandal resistant
IP66 water proof and dust proof(IP65 with audio)
Built-in power loss protection



SA-2225-13IP

Resolution: 1280x720@30fps
1/3 CMOS SONY IMX238
Day/Night(ICR), Digital Noise Filter, Super Wide Dynamic
Range
Built-in power loss protection
Anti-vibration, vandal resistant
IP66 water proof and dust proof(IP65 with audio)
Built-in power loss protection



SA-2775-13IP

Resolution: 1280x720@30fps
1/3 CMOS SONY IMX238
Day/Night(ICR),
Digital Noise Filter,
Super Wide Dynamic Range
Built-in power loss protection
Anti-vibration, vandal resistant
Ip66 water proof and
dust proof(IP65 with audio)
built-in power loss protection.



VEHICLE CAMERAS



SATE-25-13AHDNA

720*960*1080

Feature:
Inside Dome camera
Lens:2.8mm(2.5mm optional)
Lens Angle: 120°/92°
Audio:Without Audio
(with audio ,more 2USD)
Infrared LED light: 12 PCS
IR Distance: 15 ~20m
Waterproof Rate IP66(Outdoor&Indoor)
Shell material: aluminum alloy
HD mechanical IR-cut, true day & night
Size: 70mmx70mmx60mm



SA-2695-13AHD

960*1080

Dual Lens Car Camera
Inside View Cam's Lens 2.1mm ,
130 Degree view angle,
6 pcs IR LEDS,
IR Illumination:5-8m, 0Lux IR On
Audio: With Audio
Front View Cam : 2.8mm ,no IR ,
Power supply DC12V.

VEHICLE CAMERAS



SA-2885-13AHD

720*960*1080

Side view camera
Lens: 2.6mm/3.6mm
Lens Angle: 130°
Audio: Without audio
Infrared LED light: 10PCS
IR Distance: 13 m
Waterproof Rate IP69k
Shell material: aluminum alloy
HD mechanical IR-cut, true day & night



SA-2865-13AHD

720*960*1080

Side view camera
Lens: 2.6mm/3.6mm
Lens Angle: 130°
Audio: Without audio
Infrared LED light: 10PCS
IR Distance: 13 m
Waterproof Rate IP69k
Shell material: aluminum alloy
HD mechanical IR-cut, true day & night



SA-2835-13AHD

720*960*1080

Side view camera
Lens: 2.1mm/2.8mm/3.6mm
Lens Angle: 120°/110°/80°
Audio: Without audio
Infrared LED light: 9PCS
IR Distance: 8 m
Waterproof Rate IP69k
Shell material: aluminum alloy
HD mechanical IR-cut, true day & night



SA-2495-13AHD

720*960*1080

Side view camera
Lens: 2.6mm/3.6mm
Lens Angle: 130°
Audio: Without audio
Infrared LED light: 10PCS
IR Distance: 13 m
Waterproof Rate IP69k
Shell material: aluminum alloy
HD mechanical IR-cut, true day & night



SA-2455-13AHD

720*960*1080

Side view camera
Lens: 2.6mm/3.6mm
Lens Angle: 130°
Audio: Without audio
Infrared LED light: 10PCS
IR Distance: 13 m
Waterproof Rate IP69k
Shell material: aluminum alloy
HD mechanical IR-cut, true day & night



SA-2705-13AHD

720*960*1080

Fish eye Side view camera
Lens: 2.1mm/
Lens Angle: 140°
Audio: Without audio
Infrared LED light: 10PCS
IR Distance: 10 m
Waterproof Rate IP69k
Shell material: ABS&Aluminum alloy
Bracket material: iron



SA-2655-13AHD

1920*1080

- It can record in the front of car(outside) and inside at the same time;
- Special design for Taxi inside use.
- Horizontal view angle:130 degree, can synchronous take driver and passenger' s video recording;
- *Lens: Front View : 2.1mm. Inside : 2.1mm
- Excellent night-vision,clear image, little noise
- When IR light is ON, it won' t have infrared visible line, so that won' t distract driver' s sight, so it can be safe driving.



SATD-2695-13AHD

720*1080

- It can record in the front of car (outside) and inside at the same time;
- Special design for Taxi inside use.
- Horizontal view angle:130 degree, can synchronous take driver and passenger' s video recording;
- *Lens: Front View : 2.1mm. Inside : 2.1mm
- Excellent night-vision, clear image, little noise
- When IR light is ON, it won' t have infrared visible line, so that won' t distract driver' s sight, so it can be safe driving.
- Stick the camera directly via sticker.



SA-2985-13AHD

960P

Feature:
Mini Back View car camera
.Megapixel varifocal Lens 2.8mm ,
120 Degree view angle
.With LEDS,8M IR Distance
Waterproof IP67
.Powersupply DC12V.
100g, Colors black



SA-2915-13AHD

960P

Feature:
Mini Back View car camera
.Megapixel varifocal Lens 2.33mm ,
140 Degree view angle
.Without LEDS
Waterproof IP67
.Powersupply DC12V.
100g, Colors black



SA-2935-13AHD

960P

Feature:
Mini Side/Back View car camera
.Megapixel varifocal Lens 2.33mm ,
140 Degree view angle
.Without LEDS
Waterproof IP67
.Powersupply DC12V.



SATI-2975-13AHD

720*960*1080

Feature:
Mini inside View car camera
.Megapixel varifocal Lens 2.33mm ,
140 Degree view angle
.With LEDS
Waterproof IP66
.Powersupply DC12V.
100g,



VEHICLE CAMERAS



SA-2115-13AHD

720*960*1080
Rear view camera
Heavy-duty camera
Lens: 2.5mm/2.8mm
Lens Angle: 110°
Audio: Without audio(Audio optional more 2usd/pcs)
Infrared LED light: 12 PCS
IR Distance: 15 m
Waterproof Rate: IP68
Shell material: aluminum alloy
Bracket material: iron
HD mechanical IR-cut, true day & night
Dimension:75mm x 50mm x 88mm



SA-2125-13AHD

720*960*1080
Rear view camera
Heavy-duty camera
Lens: 2.5mm/2.8mm
Lens Angle: 110°
Audio: Without audio(Audio optional more 2usd/pcs)
Infrared LED light: 18 PCS
IR Distance: 15 m
Waterproof Rate: IP68
Shell material: aluminum alloy
HD mechanical IR-cut, true day & night
Dimension:80mm(L)x37mm(W)x65mm(H)



SA-2015-13AHD

720*960*1080
Mini Rear view camera
Heavy-duty camera
Lens: 2.8mm
Lens Angle: 110°
Audio: Without audio
Infrared LED light: 11 PCS
IR Distance: 8m
Waterproof Rate: IP69
Shell material: aluminum alloy
HD mechanical IR-cut, true day & night
Dimension:80mm(L)x37mm(W)x65mm(H)



SA-2325-13AHD

720*960*1080
Mini Rear view camera
Heavy-duty camera
Lens: 2.8mm
Lens Angle: 110°
Audio: Without audio(Audio optional more 2usd/pcs)
Infrared LED light: 8 PCS
IR Distance: 8m
Waterproof Rate: IP69
Shell material: aluminum alloy
HD mechanical IR-cut, true day & night
Dimension:80mm(L)x37mm(W)x65mm(H)



SA-2145-13AHD

720*960*1080
Mini Star light Rear view camera /
Front View Camera
Heavy-duty camera
Lens: 2.8mm
Lens Angle: 110°
Audio: Without audio(Audio optional more 2usd/pcs)
Infrared LED light: NO
IR Distance: NO
Waterproof Rate: IP69
Shell material: aluminum alloy
HD mechanical IR-cut, true day & night
Dimension:80mm(L)x37mm(W)x65mm(H)



SA-2185-13AHD

720*960*1080
Mini Star light Rear view camera /
Front View Camera
Heavy-duty camera
Lens: 2.8mm
Lens Angle: 110°
Audio: Without audio(Audio optional , more 2usd/pcs)
Infrared LED light: NO
IR Distance: NO
Waterproof Rate: IP69
Shell material: aluminum alloy
HD mechanical IR-cut, true day & night
Dimension:80mm(L)x37mm(W)x65mm(H)



SA-2615-13AHD

720*960*1080
Rear view camera
Heavy-duty camera
Lens: 2.8mm
Lens Angle: 120°
Audio: Without audio(Audio optional , more 2usd/pcs)
Infrared LED light: 24 PCS
IR Distance: 15 m
Waterproof Rate: IP68K
Shell material: aluminum alloy
HD mechanical IR-cut, true day & night
Dimension:80mm(L)x37mm(W)x65mm(H)



SA-2425-13AHD

720*960*1080
Dual Rear view camera
Heavy-duty camera
Lens: 2.1mm/2.8mm
Lens Angle: 120°
Audio: Without audio
Infrared LED light: 8PCS
IR Distance: 8 m
Waterproof Rate: IP68K
Shell material: aluminum alloy
HD mechanical IR-cut, true day & night



VEHICLE CAMERAS



SA-2195-13AHD

720*960*1080
Feature:
Heavy-duty camera
Lens: 2.8mm(3.6mm optional)
Lens Angle: 120° /92°
Audio: Without Audio
(with audio ,more 2USD)
Infrared LED light: 24 PCS
IR Distance: 15~20m
Waterproof Rate: IP66(Outdoor&Indoor)
Shell material: aluminum alloy
HD mechanical IR-cut, true day & night



SA-2455-13AHD

720*960*1080
Feature:
Mini Dome camera
Lens:3.6mm(2.5mm optional)
Lens Angle: 120° /92°
Audio:Without Audio
(with audio ,more 2USD)
Infrared LED light: 12 PCS
IR Distance: 15~20m
Waterproof Rate: IP66(Outdoor&Indoor)
Shell material: aluminum alloy
HD mechanical IR-cut, true day & night
Size: 68mmx68mmx55mm



SA-2685-13AHD

720*960*1080
★.Megapixel varifocal Lens 2.8mm ,
External Adjustable,
vandalproof camera case.
★.12pcs IR LEDs,
IR Illumination:10~15m, OLux IR On,
Without Audio
★.Powersupply DC12V.
★.Dimension(Φ*H)95*55mm,
Weight: 0.3kg
★.Vandal Resistant Metal Housing.
★.Without IR optional ,IP66 ,
Resistant rate: 10k



SA-2715-13AHD

720*960*1080
Mini Rear view camera
Heavy-duty camera
Lens: 2.8mm
Lens Angle: 110°
Audio: Without audio(Audio optional more 2usd/pcs)
Infrared LED light: 8 PCS
IR Distance: 8m
Waterproof Rate: IP69
Shell material: aluminum alloy
HD mechanical IR-cut, true day & night
Dimension:80mm(L)x37mm(W)x65mm(H)



SA-2545-13AHD

720*960*1080
Feature:
Dome camera
Lens:3.6mm(2.5mm optional)
Lens Angle: 120° /92°
Audio:Without Audio
(with audio ,more 2USD)
Infrared LED light: 24 PCS
IR Distance: 15~20m
Waterproof Rate: IP66(Outdoor&Indoor)
Shell material: aluminum alloy
Color:Black/White



SA-2215-13AHD

720*960*1080
Feature:
Dome camera
Lens:2.8mm(3.6mm optional)
Lens Angle: 120° /92°
Audio:Without Audio
Infrared LED light: 10 PCS
IR Distance: 15m
Waterproof Rate: IP64(Indoor)
Shell material: ABS Plastic



SA-2365-13AHD

720*960*1080
Front View camera
Heavy-duty camera
Lens: 2.1mm/2.5mm/2.8mm/3.6mm
Lens Angle: 120° /92°
Audio: Without audio
Infrared LED light: NO
IR Distance: NO
Waterproof Rate: IP64 Indoor Use
Shell material: aluminum alloy
Bracket material: 3M adhesive
Size:42mmX25mmX42mm



SA-2445-13AHD

720*960*1080
Feature:
Heavy-duty camera
Lens:2.8mm(2.5mm optional)
Lens Angle: 120° /92°
Audio:Without Audio
Infrared LED light: 12 PCS
IR Distance: 15~20m
Waterproof Rate: IP66(Outdoor&Indoor)
Shell material: aluminum alloy
HD mechanical IR-cut, true day & night
Size: 70mmx70mmx60mm



VEHICLE CAMERAS



SA-2335-13AHD

720*960*1080
Small Fish eye Side view camera
Lens: 2.1mm/
Lens Angle: 140°
Audio: Without audio
Infrared LED light: 10PCS
IR Distance: 10 m
Waterproof Rate IP69k
Shell material: aluminum alloy
Bracket material: iron



SA-2305-13AHD

720*960*1080
Small Side view camera
Lens: 2.6mm/3.6mm
Lens Angle: 130°
Audio: Without audio
Infrared LED light: 10PCS
IR Distance: 10 m
Waterproof Rate IP69k
Shell material: aluminum alloy
Bracket material: iron



SA-2805-13AHD

720*960*1080
Small Side view camera
Lens: 2.6mm/3.6mm
Lens Angle: 130°
Audio: Without audio
Infrared LED light: 10PCS
IR Distance: 10 m
Waterproof Rate IP69k
Shell material: aluminum alloy
Bracket material: iron



SA-2705-13AHD

720*960*1080
Star Light Side view camera
Lens: 2.6mm/3.6mm
Lens Angle: 130°
Audio: Without audio
Infrared LED light: No
IR Distance: No
Waterproof Rate IP69k
Shell material: aluminum alloy
Bracket material: iron



SA-2105-13AHD

720*960*1080
Heavy-duty Inside camera
Lens: 2.5mm/2.8m
Lens Angle: 110°
Audio: With audio
Infrared LED light: 12 PCS
IR Distance: 15 m
Waterproof Rate IP64(indoor use)
Shell material: aluminum alloy
HD mechanical IR-cut, true day & night



SA-2505-13AHD

720*960*1080
Feature:
Mini Dome camera
.Megapixel varifocal Lens 2.1/2.8mm,
External Adjustable,
vandalproof camera case.
.12 pcs IR LED,
IR Illumination:10-15m, 0Lux IR On
.Powersupply DC12V.
.Dimension(Φ*H)95*63mm, Weight: 0.3kg
.Vandal Resistant Metal Housing.
.Without IR optional ,IP68,
Resistant rate: 10K



front door vehicle camera



front vehicle camera



inside vehicle camera



VEHICLE CAMERAS



SA-2115-13C

Image Sensor: CMOS
Horizontal Resolution: 480/600/700/800TVL
TV System: NTSC/PAL
Lens: 1.85mm
Waterproof Grade:IP67
Operation Temp.: -20° C~+70° C
Power Supply: DC12V



SA-2915-13C

Image Sensor: CCD&CMOS
Horizontal Resolution: 480/600/700/800TVL&960P
TV SC/PAL
Lens: 1.85mm
IR Leds: 7pcs
Lens: 2.8mm
IWATERPROOF GRADE:IP67
Operation Temp.: -20° C~+70° C
Power Supply: DC12V



SA-2415-13C

Image Sensor: CCD&CMOS
Horizontal Resolution: 480/600/700/800TVL
TV System: NTSC/PAL
Lens: 2.8/3.6mm
Waterproof Grade:IP65
Operation Temp.: -20° C~+70° C
Power Supply: DC12V



SA-2935-13C

Image Sensor: CMOS
Horizontal Resolution: 700/800TVL&960P
TV System: NTSC/PAL
IR Led :No
View angle:170 degree
Waterproof Grade:IP67
Power Supply:DC12V



SA-2575-13C

Image Sensor: CMOS
Horizontal Resolution: 480/600/700/800TVL
TV System: NTSC/PAL
Lens: 1.3/1.85/2.0mm
Waterproof Grade:IP67
Operation Temp.: -20° C~+70° C
Power Supply: DC12V



SA-2885-13C

Image Sensor: CMOS
Horizontal Resolution: 480/600/700/800TVL
TV System: NTSC/PAL
Lens: 2.8/3.6mm
IR Leds: 4 pcs white light
Waterproof Grade:IP65
Operation Temp.: -20° C~+70° C
Power Supply: DC12V



SA-2565-13C

Image Sensor: CMOS
Horizontal Resolution: 480/600/700/800TVL
TV System: NTSC/PAL
Lens: 1.85/2.33mm
Waterproof Grade:IP67
Operation Temp.: -20° C~+70° C
Power Supply: DC12V



SA-2905-13C

Image Sensor: CMOS
Horizontal Resolution: 800TVL
TV System: NTSC/PAL
Lens: 1.85/2.33mm
Waterproof Grade:IP67
Operation Temp.: -20° C~+70° C
Power Supply: DC12V



SA-2355-13C

Image Sensor: CMOS
Horizontal Resolution: 480/600/700/800TVL
TV System: NTSC/PAL
Lens: 1.42mm
Waterproof Grade:IP67
Operation Temp.: -20° C~+70° C
Power Supply: DC12V



SA-2385-13C

Image Sensor: CMOS
Horizontal Resolution: 700/800TVL
TV System: NTSC/PAL
Lens: 1.85/2.33mm
Waterproof Grade:IP67
Operation Temp.: -20° C~+70° C
Power Supply: DC12V



SA-2445-13C

Image Sensor: CCD/CMOS
Horizontal Resolution: 480/600/700/800TVL
TV System: NTSC/PAL
Lens: 1.85mm
Waterproof Grade:IP67
Operation Temp.: -20° C~+70° C
Power Supply: DC12V





All-in-one Vehicle Display Screen



SA-2095-13M

"9" Monitor with Quad Images& Built-in DVR (with shade)
9"Resolution:800*R.G.B*480 /Brightness 350cd/m2
View angle:L/R: 70°,UP:50°,down: 70° degree
4 way video input, 4 ways Trig function
Trigger priority:CH2>CH1>CH3>CH4
1 way audio input for V1 (Optional)
DVR image quality:DVR recording 4 channels video signal,
VGA resolution 720*480, PAL Recording speed: 50FPS,
NTSC Recording speed: 60FPS Storage format: AVI
Memory interface:1 SD interface



SA-2895-13M

7"car rear view monitor (with shade)
Aspect ratio:16:9 image

Resolution: 800*R.G.B*480 /Brightness 400cd/m2
Resolution 1024*R.G.B*600 IPS/Brightness 300cd/m2 Optional
View angle:L/R 70°,UP:50°,down: 70° degree
2 way video input, 2 way audio input,
Automatically switch to V2 when reversing
2 ways Trig function(Optional)
System:PAL&NTSC auto-switching
8 languagesOSD,remote control

Cables Optional



7-Pin Trailer cable 4-CH (Anti-jamming)



5-Pin Trailer cable



Iron lining



multi-pin Trailer cable



5-Pin Trailer cable (Anti-jamming)



4pin aviation connector cable



Trailer curly cable



10 meters 4pin aviation connector cable



Multi-channel monitoring audio
and video connection cables



SA-2775-13M

5"/7 inch AHD vehicle mounted display (with shade)
Aspect ratio:16:9image
AV Resolution:800*R.G.B*480
View angle: L/R: 70°,UP:50°,down: 70° degree
Back Light Luminance LED, 400-500cd/
2 channel HD video input, single image display,
support 720P@25/30, 720P@50/60,
1080P@25/30 (Video Compatibility: CVBS AHD)
Automatically switch to V2 when reversing
OSD menu, remote control



SA-2315-13M

Screen size: 10.1 inches
2 Video input
Format : PAL or NTSC
Pixels : 1024(W) xRGBx600(H)
Power supply: DC 12-24V
Power Consumption: 5W
Contrast ratio:500:1
Brightness:300cd/
Operational temperature : -10 ~ +60
Storage temperature : -20 ~ +65



5-25M extension cables



10 meters 4pin aviation connector cable



4pin aviation connector cable



Setup, Download & Monitoring Tools



CP4

7" Touch Screen Display
Supports MDVR diagnosis and operation control
Built-in Speakers
Built in RFID module for sign in/out
Resolution of 800*480
Station announcement (manual and automatic)
Multiple mounting methods



CP5

10.1" Touch Screen Display
Supports MDVR diagnosis and operation control
Built-in Speakers
Built in RFID module for sign in/out
Resolution of 1024*600
Station announcement (manual and automatic)
Multiple mounting methods



Easycheck

Check the MDVR status
Support multi-channel HD video real-time preview
Supports video/track playback analysis
Plug and play design for easy use
Uses External SD card for file download
Compatible with android and iphone
Works as an SD card reader for PC for easy playback

Streamax
Australia



DATALINK
TECHNOLOGIES