


6.1 传动滚筒 Drive Pulley

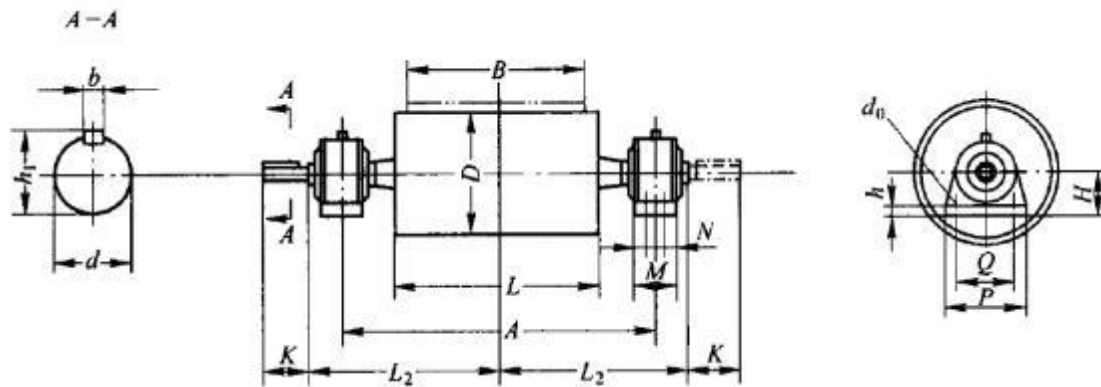

滚筒出轴要求：图号后加-S为双出轴，无S为单出轴。

Pulley shaft requirements: -S after the drawing number indicates a double shaft, and no S indicates a single shaft.

滚筒面要求：一律为铸胶表面，图号后加Y为右向人字形，加Z为左向人字形，有Y,Z为菱形。

Pulley surface requirements: All are cast rubber surfaces, Y after the drawing number indicates a rightward chevron, Z after the drawing number indicates a leftward chevron, Y and Z indicate a diamond shape.

表 6-1 Table 6-1

代号 Code	D/ mm	许用扭矩 Allowable torque kN • m	许用合力 Allowable force kN	轴承 Bearing	主要尺寸 Main size/mm														转动惯量 Moment of inertia	质量 Weight kg	图号 Drawing NO.
					A	L	L ²	d	K	M	N	Q	P	H	h	h ¹	b	d ⁰			
5050	500	2.7	49	22216	850	600	495	70	140	70		350	410	120	33	74.5	20	M20	6	259	50A105Y(Z)
6550.1	500	3.5	40	22216	1000	750	570	70	140	70		350	410	120	33	74.5	20	M20	7.8	298	65A105Y(Z)
6550.2	500	6.3	59	22220	1000	750	590	90	170	80		380		135	46	95	25	M24	7.8	393	65A205Y(Z)
6563.1	630	4.1	40	22216	1000	750	570	70	140	70		350	410	120	33	74.5	20	M20	18.5	342	65A106Y(Z)
6563.2	630	7.3	80	22220	1000	750	590	90	170	80		380		135	46	95	25	M24	18.5	451	65A206Y(Z)
8050	500	4.1	40	22220	1300	950	740	90	170	80		380		135	46	95	25	M24	9.8	454	80A105Y(Z)
8063.1	630	6	50	22220	1300	950	740	90	170	80		380		135	46	95	25	M24	23.5	521	80A106Y(Z)
8063.2	630	12	80	22224	1300	950	740	110	210	110			530	155	46	116	28	M24	29.5	749	80A206Y(Z)
8063.3	630	20	100	22228	1300	950	750	130	250	120		480	570	170	63	137	32	M30	32	932	80A306Y(Z)
8080.1	800	7	50	22220	1300	950		90	170	80		380		135	46	95	25	M24	25	618	80A107Y(Z)
8080.2	800	12	80	22224	1300	950		110	210	110			530	155	46	116	28	M24	58	868	80A207Y(Z)
8080.3	800	20	110	22228	1300	950	750	130	250	120		480	570	170	63	137	32	M30	66.3	1055	80A307Y(Z)
8080.4	800	32	160	22232	1400	950	800	150	250	200	105	520	640	200	60	158	36	M30	67.5	1255	80A407Y(Z)
80100	1000	40	240	22236	1400	950	870	170	300	220	120	570	700	220	70	179	40	M30	132.7	1770	80A108Y(Z)
80125	1250	52	360	23240	1500	950	870	190	350	225	140	640	780	240	75	200	45	M30	313	2884	80A109Y(Z)
10063.1	630	6	40	22220	1500	1150	840	90	170	80		380	460	135	46	95	25	M24	26.5	585	100A106Y(Z)
10063.2	630	12	73	22224	1500	1150	840	110	210	110		440	530	155	46	116	28	M24	38.3	823	100A206Y(Z)
10080.1	800	12	73	22224	1500	1150	840	110	210	110		440	530	155	46	116	28	M24	78.8	962	100A107Y(Z)
10080.2	800	20	110	22228	1500	1150	850	130	250	120		480	570	170	63	137	32	M30	80.3	1165	100A207Y(Z)
10080.3	800	27	160	22232	1600	1150	900	150	250	200	105	520	640	200	60	158	36	M30	81.8	1375	100A307Y(Z)
10080.4	800	40	190	22236	1600	1150	910	170	300	220	120	570	700	220	70	179	40	M30	83.3	1693	100A407Y(Z)
100100.1	1000	12	80	22224	1500	1150	840	110	210	110		440	530	155	46	116	28	M24	164.8	1176	100A108Y(Z)
100100.2	1000	20	110	22228	1500	1150	850	130	250	120		480	570	170	63	137	32	M30	166.8	1341	100A208Y(Z)
100100.3	1000	27	170	22232	1600	1150	900	150	250	200	105	520	640	200	65	158	36	M30	168.3	1607	100A308Y(Z)


代号 Code	D/ mm	许用扭矩 Allowable torque kN • m	许用合力 Allowable force kN	轴承 Bearing	主要尺寸 Main size/mm														转动惯量 Moment of inertia	质量 Weight kg	图号 Drawing NO.
					A	L	L ²	d	K	M	N	Q	P	H	h	h ¹	b	d ⁰			
100100.4	1000	40	210	22236	1600	1150	910	170	300	220	120	570	700	220	70	179	40	M30	170	1922	100A408Y(Z)
100100.5	1000	52	330	23240	1650	1150	875	190	350	255	140	640	780	240	75	200	45	M30	215.3	2683	100A508Y(Z)
100125	1250	52	450	23244	1650	1150	1000	200	350	270	140	720	880	270	80	210	45	M36	410.7	3500	100A109Y(Z)
100140	1400	66	560	23248	1650	1150	1000	220	350	300	150	750	900	290	90	231	50	M36	736	4233	100A110Y(Z)
12063.1	630	12	52	22224	1750	1400	975	110	210	110		440	530	155	46	116	28	M24	46.5	924	120A106Y(Z)
12063.2	630	20	85	22228	1750	1400	975	130	250	120		480	570	170	63	137	32	M30	47.3	1141	120A206Y(Z)
12080.1	800	12	80	22224	1750	1400	975	110	210	110		440	530	155	46	116	28	M24	96	1026	120A107Y(Z)
12080.2	800	20	110	22228	1750	1400	975	130	250	120		480	570	170	63	137	32	M30	97.8	1247	120A207Y(Z)
12080.3	800	27	140	22232	1850	1400	1025	150	250	200	105	520	640	200	65	158	36	M30	99.5	1467	120A307Y(Z)
12080.4	800	40	180	22236	1850	1400	1035	170	300	220	120	570	700	220	70	179	40	M30	101.3	1868	120A407Y(Z)
12080.5	800	52	230	23240	1900	1400	1100	190	350	240	140	640	780	240	75	200	45	M30	118.3	2517	120A507Y(Z)
120100.1	1000	12	80	22224	1750	1400	975	110	210	110		440	530	155	46	116	28	M24	200	1259	120A108Y(Z)
120100.2	1000	20	110	22228	1750	1400	975	130	250	120		480	570	170	63	137	32	M30	202.5	1430	120A208Y(Z)
120100.3	1000	27	160	22232	1850	1400	1025	150	250	200	105	520	640	200	65	158	36	M30	204.8	1710	120A308Y(Z)
120100.4	1000	40	210	22236	1850	1400	1035	170	300	220	120	570	700	220	70	179	40	M30	207	2055	120A408Y(Z)
120100.5	1000	52	290	23240	1900	1400	1100	190	350	255	140	640	780	240	75	200	45	M30	262	2911	120A508Y(Z)
120100.6	1000	66	330	23244	1900	1400	1100	200	350	270	140	720	880	270	80	210	45	M36	283	3311	120A608Y(Z)
120125.1	1250	40	420	23248	1900	1400	1150	220	350	300	150	750	900	290	90	231	50	M36	444	4265	120A109Y(Z)
120125.2	1250	66	560	24152	1900	1400	1150	240	350	320	170	750	900	290	90	252	56	M36	560	4569	120A209Y(Z)
120140	1400	80	650	24156	1900	1400	1150	260	350	320	170	840	1000	310	100	272	56	M36	855	5390	120A110Y(Z)
14080.1	800	20	100	22228	2050	1600	1125	130	250	120		480	570	170	63	137	32	M30	111.8	1359	140A107Y(Z)
14080.2	800	27	130	22232	2050	1600	1125	150	250	200	105	520	640	200	65	158	36	M30	113.8	1614	140A207Y(Z)
14080.3	800	40	170	22236	2050	1600	1135	170	300	220	120	570	700	220	70	179	40	M30	115.8	1942	140A307Y(Z)
14080.4	800	52	210	23240	2100	1600	1200	190	350	255	140	640	780	240	75	200	45	M30	135.3	2673	140A407Y(Z)
140100.1	1000	20	100	22228	2050	1600	1125	130	250	120		480	570	170	63	137	32	M30	202.5	1560	140A108Y(Z)
140100.2	1000	27	160	22232	2050	1600	1125	150	250	200	105	520	640	200	60	158	36	M30	204.8	1832	140A208Y(Z)

代号 Code	D/ mm	许用扭矩 Allowable torque kN • m	许用合力 Allowable force kN	轴承 Bearing	主要尺寸 Main size/mm														转动惯量 Moment of inertia	质量 Weight kg	图号 Drawing NO.
					A	L	L ²	d	K	M	N	Q	P	H	h	h ¹	b	d ⁰			
140100.3	1000	40	210	22236	2050	1600	1135	170	300	220	120	570	700	220	70	179	40	N30	236.5	2199	140A308Y(Z)
140100.4	1000	52	260	23240	2100	1600	1200	190	350	255	140	640	780	240	75	200	45	N30	299.5	3098	140A408Y(Z)
140100.5	1000	66	300	23244	2100	1600	1200	200	350	270	140	720	880	270	80	210	45	M36	300	3516	140A508Y(Z)
140125.1	1250	40	390	23248	2100	1600	1250	220	350	300	150	750	900	290	90	231	50	M36	541	4515	140A109Y(Z)
140125.2	1250	66	560	24152	2100	1600	1250	240	350	320	170	750	900	290	90	252	56	M36	592	4793	140A209Y(Z)
140140	1400	80	900	24060	2100	1600	1250	280	350	320	170	940	1150	330	100	272	63	M36	940	6546	140A110Y(Z)

注：1. 表中轴承型号均省略了尾标。其省略的尾标为：尾数小于等于32的为C/W33, 尾数大于等于36的为CA/W33。如轴承22232全称为22232C/W33, 轴承22236全称为22236CA/W33。
2. 双出轴滚筒之质量约为表中单出轴滚筒质量的1.05倍。

Note:
1. The bearing models in the table have omitted suffixes. The omitted suffixes are: C/W33 for bearings with a suffix less than or equal to 32, and CA/W33 for bearings with a suffix greater than or equal to 36. For example, the full name of bearing 22232 is 22232C/W33, and the full name of bearing 22236 is 22236CA/W33.
2. The mass of the double-output roller is approximately 1.05 times the mass of the single-output roller in the table.

6.2 改向滚筒 Bend Pulley

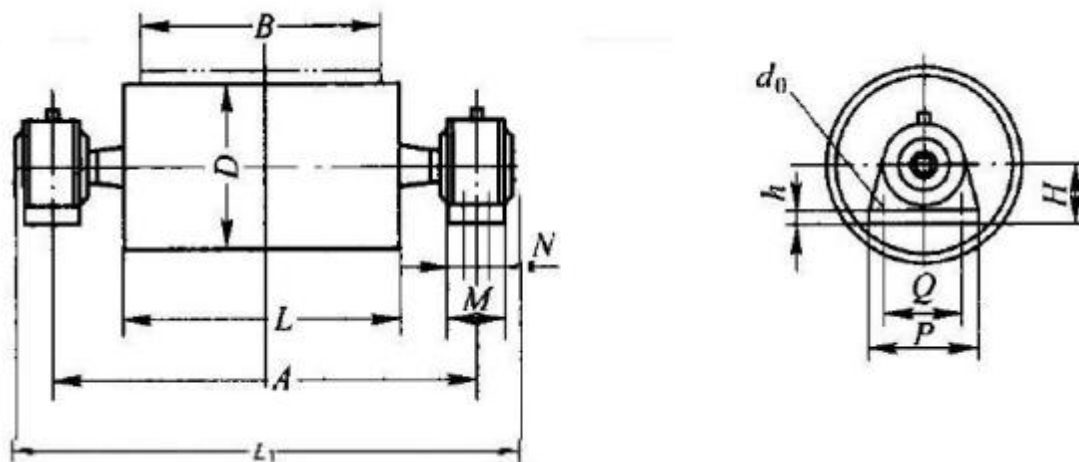

滚筒表面要求：图号后加G为光面滚筒，无G为胶面滚筒。

Pulley surface requirements: G after the drawing number indicates a smooth pulley, while no G indicates a rubber-surface pulley.

表 6-2 Table 6-2

带 宽 B/mm	直 径 D/mm	许用合力 Allowabl e force kN	轴 承 Bearing	主要尺寸 Main size/mm										光面Smooth		胶面Rubber		图 号 Drawing NO.
				A	L	L ¹	Q	P	H	h	M	N	d ^o	转动惯量 Moment of inertia/kg. m 2	质量 Weight /kg	转动惯量 Moment of inertia/kg. m 2	质量 Weight /kg	
500	250	9	22210	850	600	945	260	320	90	33	70		M16	0.5	102			50B102 (G)
	315	10												1.3	116			50B103 (G)
	400	10												3	135	3.5	147	50B104 (G)
		23	22212	850	600	953	280	340	100	33	70		M16	3	166	3.5	177	50B204 (G)
	500	28	22212											5	187	6	201	50B105 (G)
		49	22216			959	350	410	120	33			M20	5	245	6	260	50B205 (G)
		20	22216			1359	350	410	120				M20	1.8	260			80B203 (G)

带 宽 B/mm	直 径 D/mm	许用合力 Allowable force kN	轴 承 Bearing	主要尺寸 Main size/mm										光面Smooth		胶面Rubber		图号 Drawing NO.
				A	L	L ¹	Q	P	H	h	M	N	d ^o	转动惯量 Moment of inertia/kg. m2	质量 Weight /kg	转动惯量 Moment of inertia/kg. m2	质量 Weight /kg	
650	250	8	22210	1000	750	1095	260	320	90	33	70		M16	0.8	117			65B102(G)
	315	8														1.5	133	
		16	22212			1103	280	340	100	33	70		M16	1.8	166			65B203(G)
		26	22216											1109	350	410	120	33
	400	20	22212	1000	750	1103	280	340	100	33	70		M16	3	189	3.5	203	65B104(G)
		32	22216			1109	350	410	120	33	70		M20	3.3	251	3.8	265	65B204(G)
		46	22220			1129	380	460	135	46	80		M24	3.5	332	4	346	65B304(G)
	500	40	22216	1000	750	1109	350	410	120	33	70		M20	6.5	278	7.8	296	65B105(G)
		59	22220			1129	380	460	135	46	80		M24	6.5	368	7.8	386	65B205(G)
	630	59	22220	1000	750	1119	380	460	135	46	80		M24	16.3	422	18.5	440	65B106(G)
		70	22224	1050		1189	440	530	155	46	110		M24	20.3	613	21.3	640	65B206(G)
	800	250	6	22210	1250	950	1345	260	320	90	33	70		M16	0.8	136		
315		12	22212	1353			280	340	100	1.5					200			80B103(G)
		20	22216	1359			350	410	120	M20				1.8	260			80B203(G)
		20	22216							M20				4.5	288	4.8	306	80B104(G)
400		29	22220	1300	1429		380	460	135	46	80		M24	4.8	360	5	487	80B204(G)
		45	22224		1439		440	530	155		110		5.5	509	6.3	527	80B304(G)	

带宽 B/mm	直径 D/mm	许用合力 Allowable force kN	轴承 Bearing	主要尺寸 Main size/mm										光面Smooth		胶面Rubber		图号 Drawing NO.
				A	L	L ₁	Q	P	H	h	M	N	d ₀	转动惯量 Moment of inertia/kg. m2	质量 Weight /kg	转动惯量 Moment of inertia/kg. m2	质量 Weight /kg	
800	500	40	22220	1300	950	1429	380	460	135	46	80		M24	7.8	412	9.8	434	80B105(G)
		56	22224			1439	440	530	155	46	110		M24	7.8	560	9.3	582	80B205(G)
	630	50	22220	1300	950	1429	380	460	135	46	80		M24	19.5	472	23.5	560	80B106(G)
		73	22224			1439	440	530	155	46	110		M24	24.3	690	49.5	719	80B206(G)
		100	22228			1449	480	570	170	63	120		M30	27.8	855	30.8	883	80B306(G)
		170	22232	1400	950	1600	520	640	200	60	200	105	M30	30	1080	33	1108	80B406(G)
	800	90	22224	1300	950	1439	440	530	155	46	110		M24	49.8	780	57.3	823	80B107(G)
		126	22228	1300		1449	480	570	70	63	120		M30	54.8	942	61.8	976	80B207(G)
		170	22232	1400		1600	520	640	200	65	200	105		60.5	1200	67.5	1243	80B307(G)
		250	22236	1400		1620	570	700	220	70	220	120		61.8	1469	68.8	1533	80B407(G)
	1000	240	22232	1400	950	1600	520	640	200	65	200	105	M30	125.3	1413	140	1487	80B108(G)
		330	22236	1400	950	1620	570	700	220	70	220	120	M30	126.5	1675	140.3	1755	80B208(G)
		400	22240	1400	950	1655	640	780	240	75	255	140	M30	285.8	2397	290.4	2463	80B308(G)
	1250	400	23244	1400	950	1702	720	880	270	80	270	140	M36	365.4	3104	370.8	3174	80B109(G)
1000	250	6	22210	1450	1150	1545	260	320	90	33	70		M16	1	156			100B102(G)
	315	11	22212			1553	280	340	100				M16	1.8	221			100B103(G)
		18	22216			1559	350	410	120				M20	2	296			100B203(G)
	400	18	22216	1450	1150	1559	350	410	120	33	70		M20	5	328	6	350	100B104(G)
		29	22220	1500		1629	380	460	135	46	80		M24	5	427	6	445	100B204(G)
		45	22224	1500	1150	1639	440	530	155	46	110		M24	7.3	567	8.3	589	100B304(G)

带宽 B/mm	直径 D/mm	许用合力 Allowable force kN	轴承 Bearing	主要尺寸 Main size/mm										Smooth		Rubber		图号 Drawing NO.
				A	L	L ¹	Q	P	H	h	M	N	d ⁰	转动惯量 Moment of inertia/kg. m2	质量 Weight /kg	转动惯量 Moment of inertia/kg. m2	质量 Weight /kg	
1000	500	35	22220	1500	1150	1629	380	460	135	46	80		M24	8.5	472	9.8	500	100B105 (G)
		45	22224			1639	440	530	155	46	110		M24	9.5	624	11.3	652	100B205 (G)
		75	22228			1649	480	570	170	63	120		M30	11.5	804	13.3	831	100B305 (G)
	630	43	22220	1500	1150	1629	380	460	135	46	80		M24	23	546	26.5	567	100B106 (G)
		64	22224	1500	1150	1639	440	530	155	46	110		M24	29.8	753	33.3	797	100B206 (G)
		87	22228		1150	1649	480	570	170	63	120		M30	32.5	940	36	975	100B306 (G)
		168	22232	1600	1150	1800	520	640	200	65	200	105	M30	34	1180	38.5	1214	100B406 (G)
	800	79	22224	1500	1150	1639	440	530	155	46	110		M24	58.3	864	67	916	100B107 (G)
		110	22228			1649	480	570	170	63	120		M30	64.3	1042	73	1094	100B207 (G)
		168	22232	1600	1150	1800	520	640	200	65	200	105	M30	73.3	1313	81.8	1365	100B307 (G)
		220	22236			1820	570	700	220	70	220	120	M30	74.8	1606	83.3	1659	100B407 (G)
	1000	130	22228	1500	1150	1649	480	570	170	63	120		M30	131.5	1214	150.8	1280	100B108 (G)
		200	22232	1600		1800	520	640	200	65	200	105	M30	151.5	1542	168.3	1607	100B208 (G)
		290	22236			1822	570	700	220	70	220	120	M30	153.3	1830	170	1885	100B308 (G)
		387	23240	1650		1930	640	780	240	75	255	140	M30	198.5	2440	215.3	2510	100B408 (G)
		429	23244			1952	720	880	270	80	270	140	M36	215.8	2818	232.5	2884	100B508 (G)
	1250	400	23244	1650	1150	1952	720	880	270	80	270	140	M36	410.5	3340	419.8	3425	100B109 (G)
	1400	600	23248			1976	750	900	290	90	300	150	M36	556.3	3972	232.5	5684	100B110 (G)

带宽 B/mm	直径 D/mm	许用合力 Allowable force kN	轴承 Bearing	主要尺寸 Main size/mm										光面Smooth		胶面Rubber		图号 Drawing NO.
				A	L	L ₁	Q	P	H	h	M	N	d ^o	转动惯量 Moment of inertia/kg. m2	质量 Weight /kg	转动惯量 Moment of inertia/kg. m2	质量 Weight /kg	
1200	250	6	22210		1400	1795	260	320	90	33	70		M16	1.3	181			120B102 (G)
	315	11	22212			1803	280	340	100	33	70		M16	1.8	255			120B103 (G)
		17	22216			1809	350	410	120	33	70		M20	2	341			120B203 (G)
	400	17	22216	1700	1400	1809	350	410	120	33	70		M20	6	378	7	405	120B104 (G)
		26	22220	1750		1879	380	460	135	46	80		M24			7	556	120B204 (G)
		38	22224	1750	1400	1889	440	530	155	46	110		M24			10	659	120B304 (G)
	500	30	22220	1750	1400	1879	380	460	135	46	80		M24			16.3	572	120B105 (G)
		41	22224			1899	440	530	155	46	110		M24			13.8	731	120B205 (G)
		70	22228			1899	480	570	170	63	120		M30			21	925	120B305 (G)
	630	37	22220	1750	1400	1879	380	460	135	46	80		M24			32.3	659	120B106 (G)
		53	22224			1889	440	530	155	46	110		M24			38	893	120B206 (G)
	630	90	22228	1750	1400	1899	480	570	170	63	120		M30			42.5	1090	120B306 (G)
		150	22232	1850	1400	2050	520	640	200	65	200	105	M30			46.8	1334	120B406 (G)
	800	64	22224	1750	1400	1889	440	530	155	46	110		M24			79.5	1032	120B107 (G)
		100	22228			1889	480	570	170	63	120		M30			87	1229	120B207 (G)
		150	22232	1850		2050	520	640	200	65	200	105	M30			99.5	1507	120B307 (G)
		200	22236			2070	570	700	220	70	220	120	M30			101.3	1824	120B407 (G)
		230	23240	1900		2180	640	780	240	75	255	140	M30			118.3	2309	120B507 (G)
	1000	134	22228	1750	1400	1899	480	570	170	63	120		M30			175.8	1438	120B108 (G)
		150	22232	1850		2050	520	640	200	65	200	105	M30			204.8	1770	120B208 (G)
		200	22236			2070	570	700	220	70	220	120	M30			207	2086	120B308 (G)
		351	23240	1900	1400	2180	640	780	240	75	255	140	M30			262	2711	120B408 (G)
		391	23244	1900	1400	2202	720	880	270	80	270	140	M36			283	3068	120B508 (G)
		437	23248			2226	750	900	290	90	300	150	M36			291	3622	120B608 (G)
	1250	400	23248	1900	1400	2226	750	900	290	90	300	150	M36			528	4173	120B109 (G)
		550	24152			2230	750	900	290	90	320	170	M36			564	4324	120B209 (G)
	1400	900	24060			2230	940	1150	330	100	320	170	M36			906	5983	120B110 (G)

带宽 B/mm	直径 D/mm	许用合力 Allowable force kN	轴承 Bearing	主要尺寸 Main size/mm										光面Smooth		胶面Rubber		图号 Drawing NO.
				A	L	L ¹	Q	P	H	h	M	N	d ^o	转动惯量 Moment of inertia/kg. m2	质量 Weight /kg	转动惯量 Moment of inertia/kg. m2	质量 Weight /kg	
1400	315	17	22216	1900	1600	2009	350	410	120	33	70		M20	2.3	356			140B103 (G)
	400	17	22220	1900	1600	2009	350	410	120	33	70		M20	6.8	398	8	429	140B104 (G)
		25	22224	1950		2079	380	460	135	46	80		M24			8	560	140B204 (G)
		40	22228			2089	440	530	155	46	110		M24			11.5	729	140B304 (G)
	500	25	22224	1950	1600	2079	380	460	135	46	80		M24			18.5	629	140B105 (G)
		40	22228			2089	440	530	155	46	110		M24			15.8	809	140B205 (G)
		66	22232			2050	2199	480	570	170	63	120		M30			24	1009
	630	50	22224	1950	1600	2089	440	530	155	46	110		M24			42.8	971	140B106 (G)
		90	22228	2050	1600	2199	480	570	170	63	120		M30			48	1197	140B206 (G)
		150	22232			2250	520	640	200	65	200	105	M30			53.5	1439	140B306 (G)
1400	800	50	22224	1950	1600	2089	440	530	155	46	110		M24			89.3	1124	140B107 (G)
		94	22228	2050	1600	2199	480	570	170	63	120		M30			98.3	1350	140B207 (G)
		150	22232			2250	520	640	200	65	200	105	M30			113.8	1628	140B307 (G)
		186	22236			2270	570	700	220	70	220	120	M30			115.8	1970	140B407 (G)
		214	23240	2100		2380	640	780	240	75	240	140	M30			135.3	2253	140B507 (G)
	1000	100	22228	2050	1600	2199	480	570	170	63	120		M30			198	1580	140B108 (G)
		150	22232			2250	520	640	200	65	200	105	M30			234	1910	140B208 (G)
		236	22236			2270	570	700	220	70	220	120	M30			236.5	2253	140B308 (G)
		331	23240	2100		2380	640	780	240	75	255	140	M30			299.5	2820	140B408 (G)
		361	23244			2402	720	880	270	80	270	140	M36			300	3831	140B508 (G)
		400	23248			2426	750	900	290	90	300	150	M36			323.8	3848	140B608 (G)
		427	24152			2444	750	900	290	90	320	170	M36			375.5	4118	140B708 (G)
	1250	600	24156	2100	1600	2444	840	1000	310	100	320	170	M36			592	4519	140B109 (G)
	1250	900	24060			2444	940	1150	330	100	320	170	M36			713	5828	140B209 (G)
	1400	900	24060			2444	940	1150	330	100	320	170	M36			990	6329	140B110 (G)

注: 表中轴承型号均省略了尾标。其省略的尾标为: 尾数小于等于 32 的 C/W33, 尾数大于等于 36 的为 CA/W33。如轴承 22232 全称为 22232C/W33, 轴承 22236 全程 22236CA/W33。

Note: The bearing models in the table all omit the suffix. The omitted suffix is: C/W33 with a suffix less than or equal to 32, and CA/W33 with a suffix greater than or equal to 36. For example, the full name of bearing 22232 is 22232C/W33, and the full name of bearing 22236 is 22236CA/W33.