




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF OCTANE FITNESS. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF OCTANE FITNESS IS PROHIBITED.

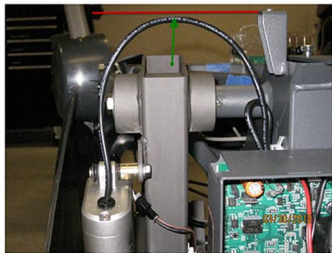



HEIGHT OF CABLE FROM ACTUATOR MOTOR SHOULD BE EVEN WITH BRACKET ON FRAME AS SHOWN IN ABOVE PICTURE

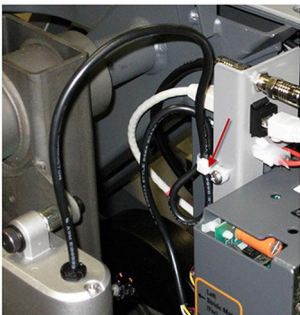

ROUTE RIGHT ACTUATOR MOTOR CABLE AS SHOWN. POSITION CABLE TIE 101416-001 AS SHOWN.

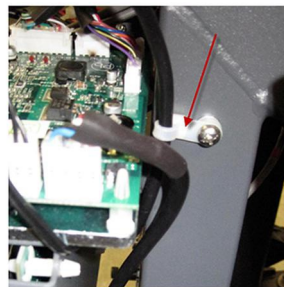

ROUTE LEFT ACTUATOR MOTOR CABLE AS SHOWN. POSITION CABLE TIE 101416-001 AS SHOWN.

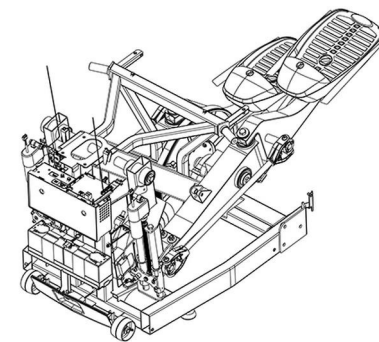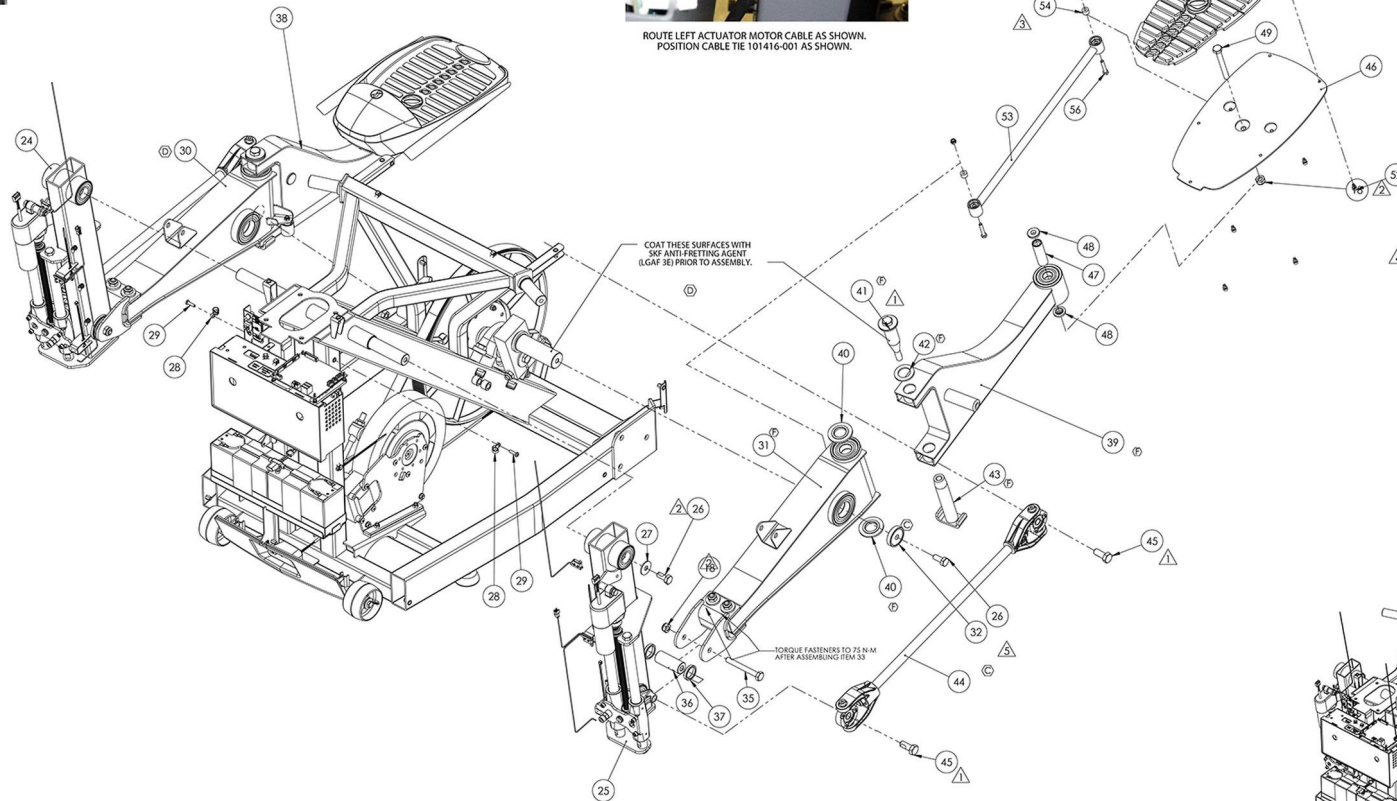

NOTES:

- ▲ TORQUE FASTENER TO 102 N-M (75 FT-LBS)
- ▲ TORQUE FASTENER TO 45 N-M (33 FT-LBS)
- ▲ TORQUE FASTENER TO 10 N-M (7.3 FT-LBS)
- ▲ TORQUE FASTENER TO 6 N-M (4.4 FT-LBS)
- ▲ TORQUE FASTENER TO 75 N-M (55 FT-LBS)

- OCTANE FITNESS ENGINEERING APPROVAL ON FIRST SAMPLE AND VENDOR INSPECTION REPORT REQUIRED PRIOR TO PRODUCTION FROM NEW OR REVISED TOOLING.
- SUPPLIER MUST SUPPLY A DECLARATION OF COMPLIANCE WITH EUROPEAN COUNCIL DIRECTIVE 2002/95/EC, ON THE RESTRICTION OF USE OF CERTAIN HAZARDOUS SUBSTANCES (ROHS).

ITEM NO.	PART NUMBER	DESCRIPTION	SHEET 3/QTY.
18	103395-001	NUT, HEX, NYLON INSERT, M10 X 1.5, CZ CLASS 10	11
24	107580-001	ASSY, ADJUSTABLE ROCKER, RH	1
25	107579-001	ASSY, ADJUSTABLE ROCKER, LH	1
26	106618-001	BOLT, M10 X 1.5 X 25, HEX HEAD, CLASS 10.9	14
27	101720-001	WASHER, 10 X 30 X 2, STEEL, CZ	4
28	101416-001	CABLE TIE, SCREW MOUNT, M5	2
29	102134-001	SCREW, M5 X 0.8 X 18, PAN HEAD, TYPE 1 CROSS RECESSED, SS	37
30	110124-001	ASSY, MID PEDAL - RH	1
31	110123-001	ASSY, MID PEDAL - LH	1
32	108441-001	RETAINER, MID PEDAL CRANK SPINDLE	2
35	104591-001	BOLT, M10 X 1.5 X 85, HEX HEAD, CLASS 10.9	2
36	106622-001	SHAFT, PEDAL ROCKER PIVOT	2
37	106623-001	SPACER, PEDAL ROCKER CAP	4
38	110126-001	ASSY, REAR PEDAL - RH	1
39	110125-001	ASSY, REAR PEDAL - LH	1
40	110268-001	CUP SPACER	4
41	110264-001	BOLT-25MM SHOULDER, M12 X 1.75 X 115, HEX HEAD, CLASS 12.9	2
42	110147-001	WASHER, PLAIN, STL, 26 X 41 X 3.1	2
43	110134-001	WLDMT, EXTENDED NUT	2
44	106575-001	ASSY, MULTI-AXIS BEARING LINK	2
45	104588-001	BOLT, M12 X 1.75 X 30, HEX HEAD, CLASS 10.9	4
46	106171-001	WLDMT, FOOT PLATFORM	2
47	106165-001	SHAFT, FOOT PLATFORM	2
48	105880-001	SPACER, FOOT PLATFORM	4
49	106211-001	BOLT, M10 X 1.5 X 90, HEX HEAD, CLASS 10.9	2
50	107788-001	ASSY, LATERAL, FOOT PEDAL	2
51	106277-001	INSERT, RUBBER TREAD, WIDE PEDAL	2
52	101298-001	SCREW, M5 X 0.8 X 10.0, SHCS, BLACK ZINC, 12.9 STL, SPRING WASHER	10
53	107067-001	ASSY, PARALLEL LINK	2
54	107034-001	SPACER, PARALLEL LINK	4
55	103584-001	NUT, HEX, NYLON INSERT, M6 X 1, CZ CLASS 10	4
56	107035-001	BOLT, M6 X 1.0 X 35, HEX HEAD, CLASS 10.9	4

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS (IN PARENTHESES)		OCTANE FITNESS Fuel Your Life	
TOLERANCES ARE:		PART DESCRIPTION LX8000 TOUCH BASE	
DECIMALS	ANGLES	XX ±0.50 XXX ±0.100	
APPROVALS	DATE	SCALE	107100-001
DESIGNED BY	5/18/2011	SCALE 1:1	DO NOT SCALE DRAWING