
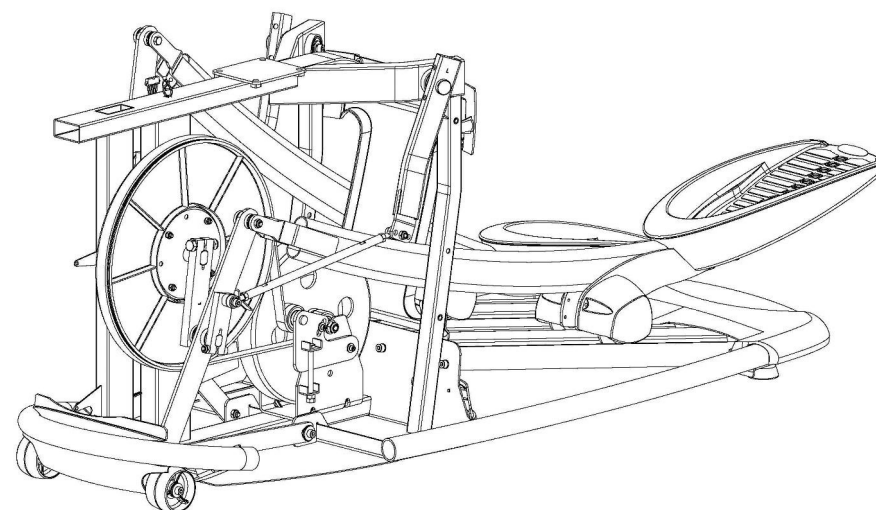


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF OCTANE FITNESS. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF OCTANE FITNESS IS PROHIBITED.

REV	DESCRIPTION	ECN #	DATE	ENG
-	See Sheet1	-	-	-

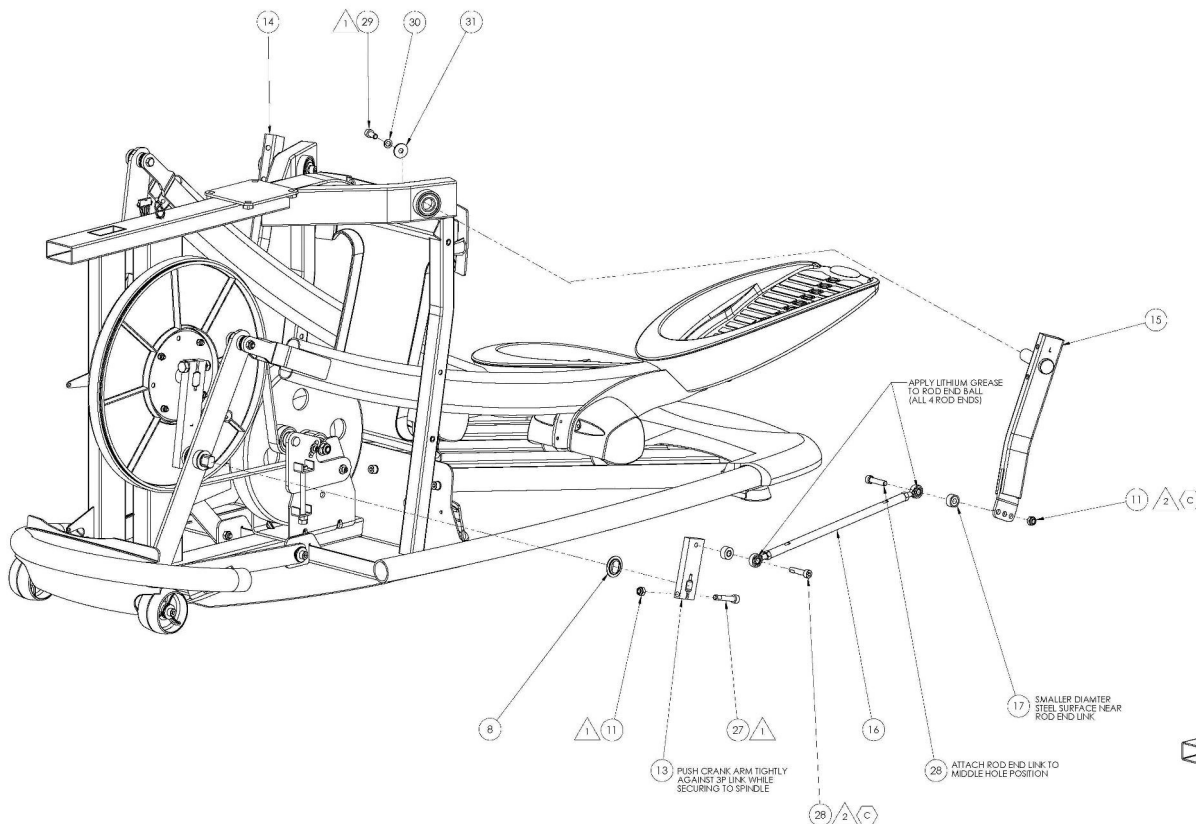

ITEM NO.	PART NUMBER	DESCRIPTION	QTY
8	103732-001	WASHER, CENTER 3P	2
11	103393-001	NUT, HEX, NYLON INSERT, M8 X 1.25, CZ CLASS 10	4
13	103420-001	CRANK, OFFSET	2
14	103721-001	WELDMENT, RIGHT ROCKER	1
15	103724-001	WELDMENT, LEFT ROCKER	1
16	109747-001	ASSEMBLY, ROD END LINK	2
17	106653-001	SPACER, 8 X 20 X 10, METAL-PLASTIC, HARDENED	4
27	101296-001	SCREW, M8 X 1.25 X 45.0L SHCS, BLACK ZINC, 12-9 STL	2
28	101723-001	SCREW, M8 X 1.25 X 35.0L SHCS, BLACK ZINC, 12-9 STL	4
29	950007-001	SCREW, M8 X 1.25 X 20.0L SHCS, BLACK ZINC, STL	2
30	950052-008	8.18.21.2M, WASHER, LOCK, STL, M8	2
31	102454-001	WASHER, 8 X 24 X 2, STEEL, CZ	2

NOTES:

- TORQUE FASTENER TO 23 N-M (17 FT-LB)
- TORQUE FASTENER TO 45 N-M (33 FT-LB)

TOLERANCES ARE:		PART DESCRIPTION	
DECIMALS	ANGLES	PRO310 BASE INT'L	
0.00	0.00		
0.01	0.01		
0.02	0.02		
0.03	0.03		
0.04	0.04		
0.05	0.05		
0.06	0.06		
0.07	0.07		
0.08	0.08		
0.09	0.09		
0.10	0.10		
0.11	0.11		
0.12	0.12		
0.13	0.13		
0.14	0.14		
0.15	0.15		
0.16	0.16		
0.17	0.17		
0.18	0.18		
0.19	0.19		
0.20	0.20		
0.21	0.21		
0.22	0.22		
0.23	0.23		
0.24	0.24		
0.25	0.25		
0.26	0.26		
0.27	0.27		
0.28	0.28		
0.29	0.29		
0.30	0.30		
0.31	0.31		
0.32	0.32		
0.33	0.33		
0.34	0.34		
0.35	0.35		
0.36	0.36		
0.37	0.37		
0.38	0.38		
0.39	0.39		
0.40	0.40		
0.41	0.41		
0.42	0.42		
0.43	0.43		
0.44	0.44		
0.45	0.45		
0.46	0.46		
0.47	0.47		
0.48	0.48		
0.49	0.49		
0.50	0.50		
0.51	0.51		
0.52	0.52		
0.53	0.53		
0.54	0.54		
0.55	0.55		
0.56	0.56		
0.57	0.57		
0.58	0.58		
0.59	0.59		
0.60	0.60		
0.61	0.61		
0.62	0.62		
0.63	0.63		
0.64	0.64		
0.65	0.65		
0.66	0.66		
0.67	0.67		
0.68	0.68		
0.69	0.69		
0.70	0.70		
0.71	0.71		
0.72	0.72		
0.73	0.73		
0.74	0.74		
0.75	0.75		
0.76	0.76		
0.77	0.77		
0.78	0.78		
0.79	0.79		
0.80	0.80		
0.81	0.81		
0.82	0.82		
0.83	0.83		
0.84	0.84		
0.85	0.85		
0.86	0.86		
0.87	0.87		
0.88	0.88		
0.89	0.89		
0.90	0.90		
0.91	0.91		
0.92	0.92		
0.93	0.93		
0.94	0.94		
0.95	0.95		
0.96	0.96		
0.97	0.97		
0.98	0.98		
0.99	0.99		
1.00	1.00		