


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF OCTANE FITNESS. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF OCTANE FITNESS IS PROHIBITED.

REV	DESCRIPTION	ECN #	DATE	ENG
1	See Sheet 1			

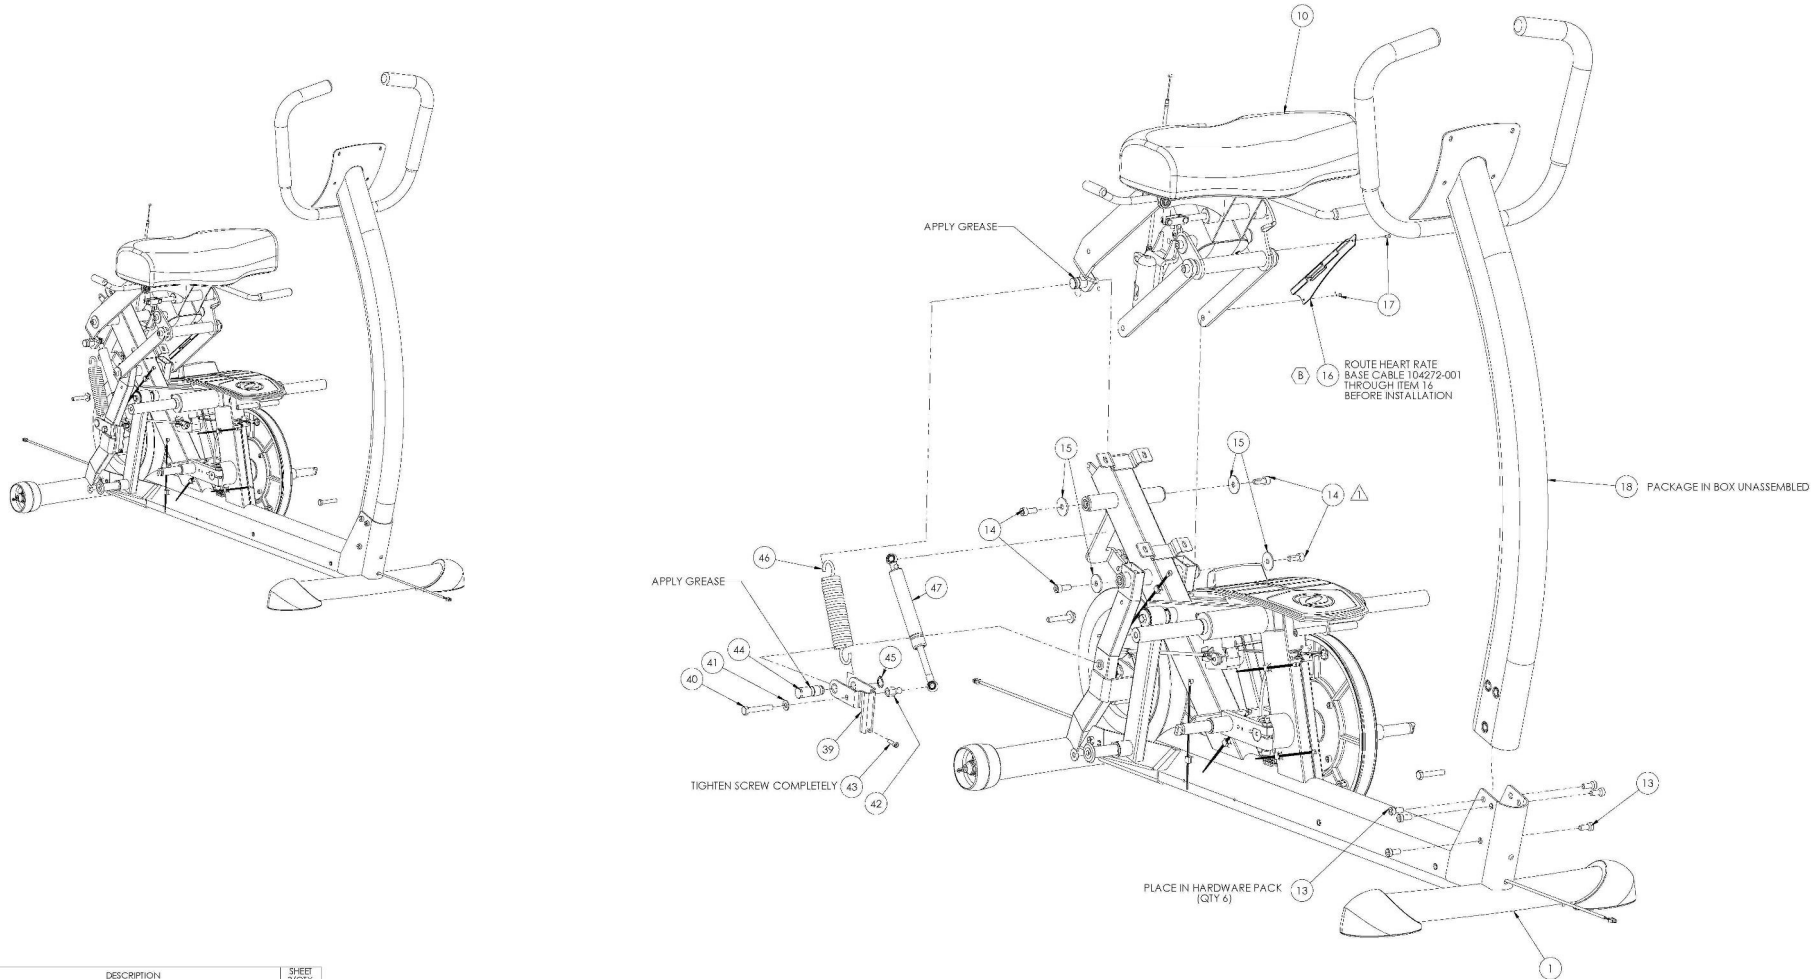

ITEM	PART NUMBER	DESCRIPTION	SHEET 3/QTY.
13	100754-001	SCREW, M8X1.25X1.6 SHCS, STL, BZ	6
14	104697-001	SCREW, M8 X 1.25 X 20 DL SHCS, CLEAR ZINC, 12.9 STL	4
15	102132-001	WASHER, 8.5 X 30 X 2 CZ	4
16	104515-001	RETAINER, HR CABLE	1
17	103237-001	SCREW, M3 X 0.5 X 8, FLAT SHCS, STAINLESS STEEL	2
39	104957-001	BRACKET, SPRING MOUNT	1
40	101889-001	SCREW, M8 X 1.25 X 50 FHCS, 8.8 ST, CZ	1
41	101029-001	WASHER, M8, 8.3 X 16.0 X 1.6, ST, BZ	1
42	104971-001	NUT, BALL STUD	1
43	104988-001	SCREW, M5 X 0.8 X 18L SHCS, BZ	1
44	104670-001	PNL, SPRING MOUNT	1
45	101713-001	RETAINING RING, 14MM	1
46	104965-001	SPRING, EXTENSION, 31.8 X 165	1
47	104968-001	ASSEMBLY, DAMPER	1

NOTES:

⚠ TORQUE FASTENERS TO 23 N-M (17 FT-LBS)

- OCTANE FITNESS ENGINEERING APPROVAL ON FIRST SAMPLE AND VENDOR INSPECTION REPORT REQUIRED PRIOR TO PRODUCTION FROM NEW OR REVISED TOOLING.
- SUPPLIER MUST SUPPLY A DECLARATION OF COMPLIANCE WITH EUROPEAN COUNCIL DIRECTIVE 2002/95/EC, ON THE RESTRICTION OF USE OF CERTAIN HAZARDOUS SUBSTANCES (RoHS).

TOLERANCES ARE:		PART DESCRIPTION	
DECIMALS	ANGLES	XR4 BASE WW, 2014	
.005	.005		
.005	.005		
.005	.005		
APPROVED BY:	DATE:	REV:	109500-001
1/1/2024	1/1/2024	1	