

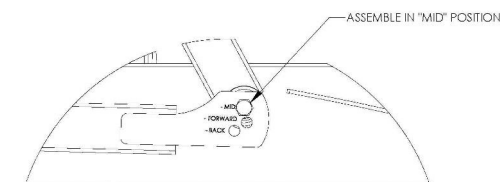
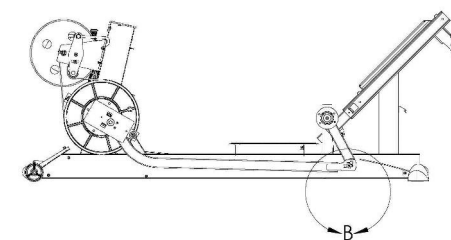


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF OCTANE FITNESS. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF OCTANE FITNESS IS PROHIBITED.

REV	DESCRIPTION	ECO #	DATE	ENG
1	See Sheet 1	1	11/11/11	1

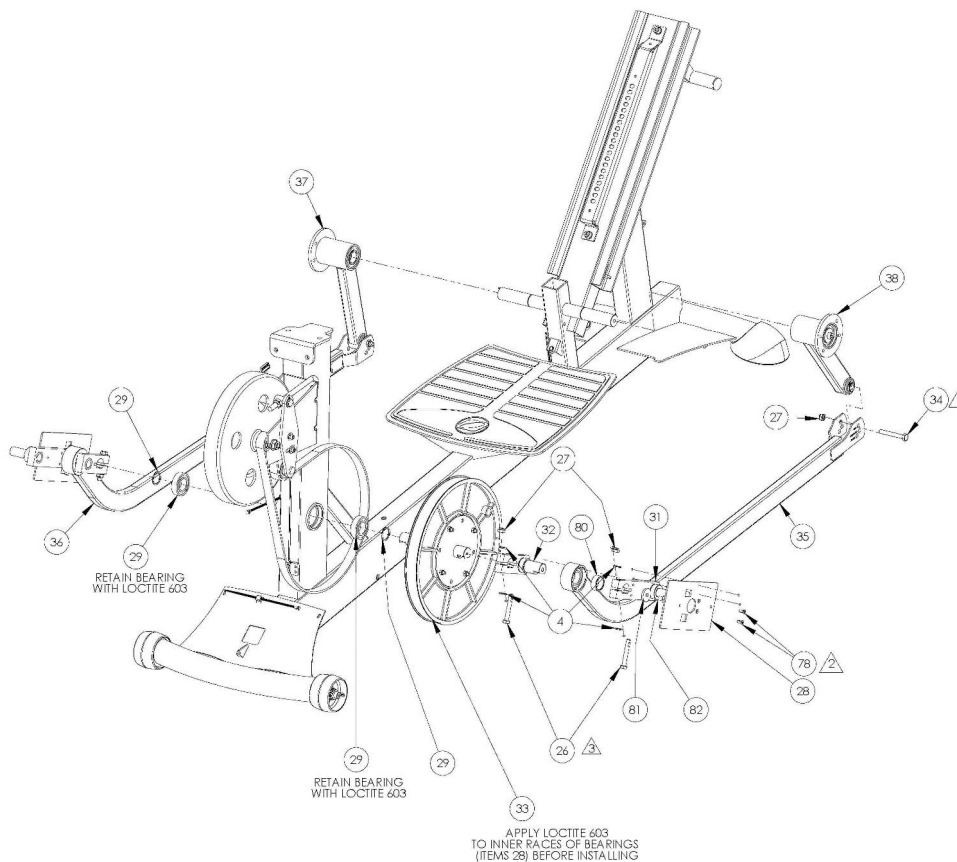

DETAIL B
SCALE 1 : 2

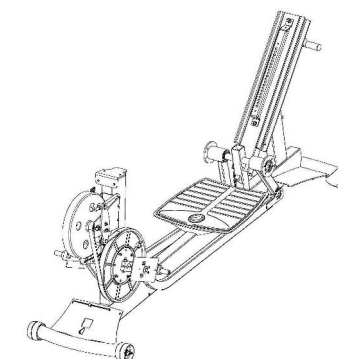

ITEM NO.	PART NUMBER	DESCRIPTION	SHEET #/CY
4	101029-00	WASHER, M8, 8.3 X 16.0 X 1.6, ST, BZ	10
26	107005-00	SCREW, M8 X 1.25 X 55 HHCS, 12.9 ST, BZ	4
27	103993-00	NUT, HEX, NYLON INSERT, M8 X 1.25, CZ CLASS 10	6
28	102203-00	PLATE, CRANK COVER	2
29	101646-00	BEARING, 6005 BALL, CHINESE	2
29	900009-00	RING, RETAINING, 25MM	2
31	101516-00	WLDMT, SMALL CRANK ARM	2
32	104762-00	WLDMT, LARGE CRANK ARM	2
33	107877-00	ASSEMBLY, DRIVE PULLEY	1
34	103101-00	SCREW, M8 X 1.25 X 60 HHCS, 8.8 ST, CZ	2
35	102285-00	ASSEMBLY, ARM LINK, LH	1
36	102281-00	ASSEMBLY, ARM LINK, RH	1
37	102514-00	ASSEMBLY, ROCKER RIGHT	1
38	102515-00	ASSEMBLY, ROCKER LEFT	1
78	102331-00	SCREW, M8 X 0.8 X 12, FLAT HEAD, TYPE 1 CROSS RECESSED, BZ	4
80	104738-00	SPACER, CRANK	2
81	104757-00	WASHER, THICK 28x8x4mm	2
82	102351-00	SCREW, M8 X 1.25 X 12 HHCS, 8.8 STL, CZ	2

NOTES:

1. TORQUE FASTENER TO 23 N-M (17 FT-LB)
2. TORQUE FASTENER TO 3 - 4 N-M (26 - 35 IN-LB).
3. TORQUE FASTENER TO 40 N-M (29.5 FT-LB).
4. RIGHT SIDE ROCKER AND LINK ARE ASSEMBLED IN THE SAME MANNER AS THE LEFT.
5. OCTANE FITNESS ENGINEERING APPROVAL ON FIRST SAMPLE AND VEHICLE INSURANCE REPORT REQUIRED PRIOR TO PRODUCTION FROM NEW OR REVISED TOOLING.
6. SUPPLIER MUST SUPPLY A DECLARATION OF COMPLIANCE WITH EUROPEAN COMMISSION DIRECTIVE 2002/26/EC ON THE RESTRICTION OF USE OF CERTAIN HAZARDOUS SUBSTANCES (ROHS).

[illegible]