


8  
7  
6  
5  
4  
3  
2

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF OCTANE FITNESS. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF OCTANE FITNESS IS PROHIBITED.

REV	DESCRIPTION	ECN #	DATE	ENG
-	See REVISION SHEET	-	-	-

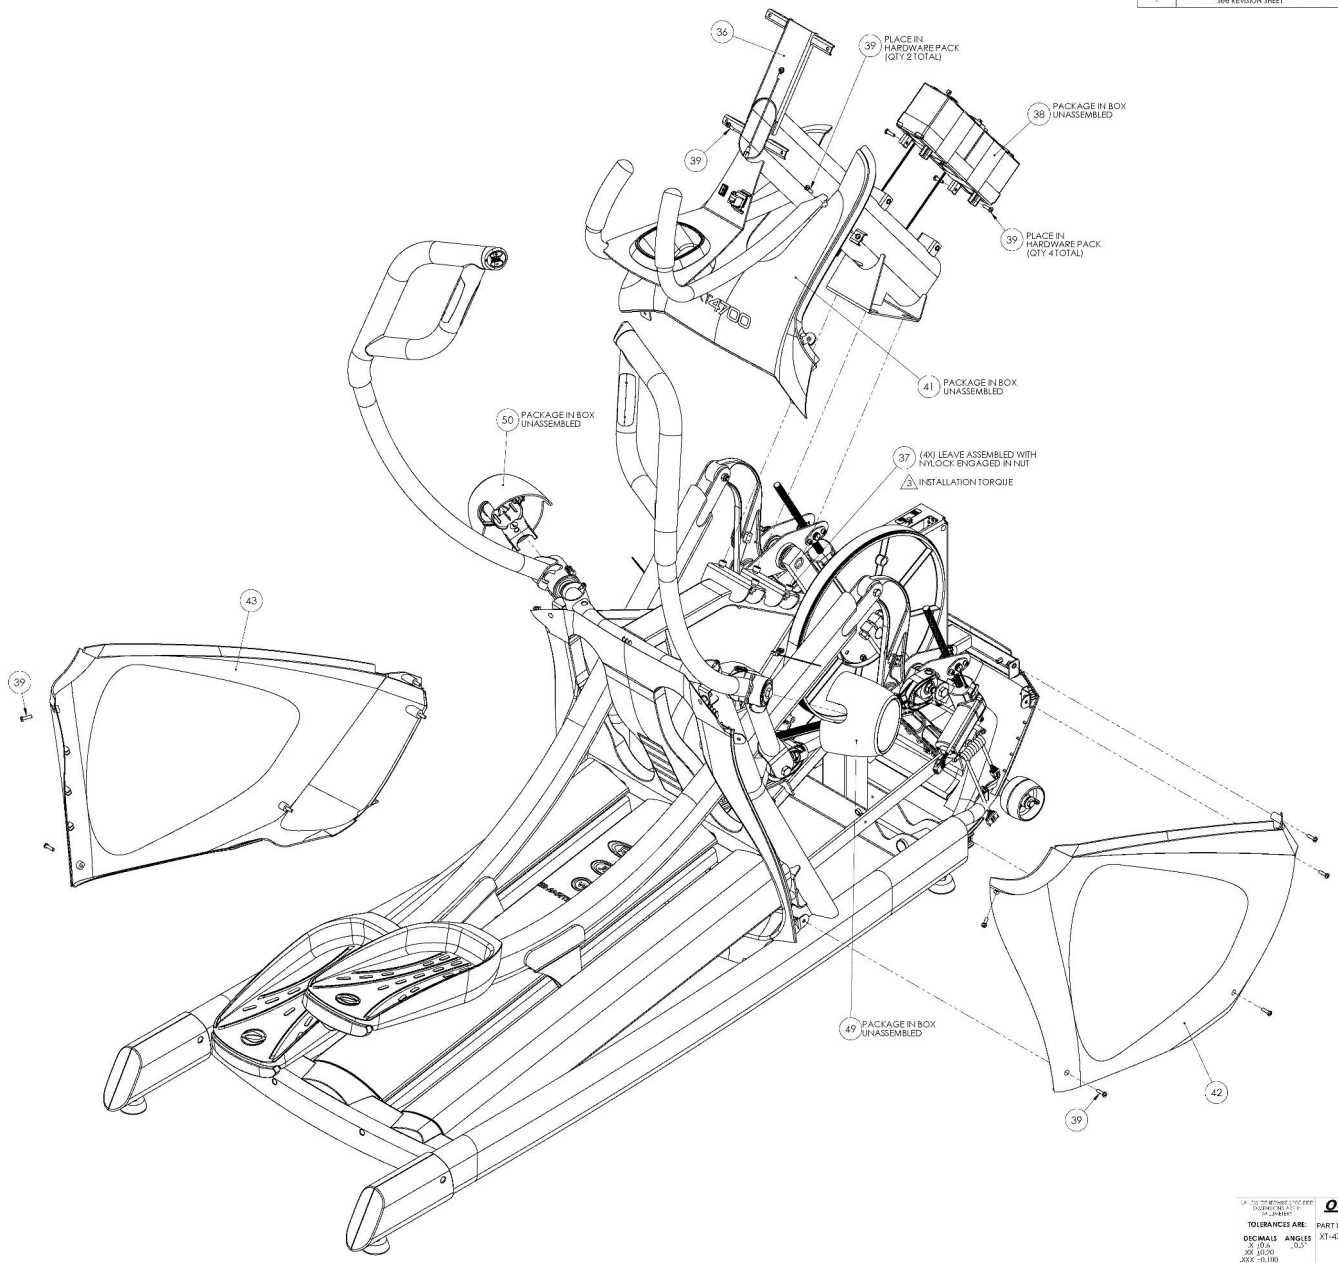

NOTES:

- 1. TORQUE FASTENER TO 6 N-M (4 FT-LBS)
- 2. TORQUE FASTENER TO 12 N-M (9 FT-LBS)
- 3. TORQUE FASTENER TO 23 N-M (17 FT-LBS)
- 4. TORQUE FASTENER TO 45 N-M (33 FT-LBS)
- 5. TORQUE FASTENER TO 60 N-M (44 FT-LBS)
- 6. TORQUE FASTENER TO 75 N-M (55 FT-LBS)
- 7. TORQUE FASTENER TO 102 N-M (75 FT-LBS)
- 8. OCTANE FITNESS ENGINEERING APPROVAL ON FIRST SAMPLE AND VENDOR INSPECTION REPORT REQUIRED PRIOR TO PRODUCTION FROM NEW OR REVISED TOOLING.
- 9. CAD GENERATED MODEL. ANY DIMENSIONS NOT ON THIS PRINT SHOULD BE EXTRACTED FROM THE CAD MODEL.
- 10. SUPPLIER MUST SUPPLY A DECLARATION OF COMPLIANCE WITH EUROPEAN COUNCIL DIRECTIVE 2011/65/EU, ON THE RESTRICTION OF USE OF CERTAIN HAZARDOUS SUBSTANCES (RoHS).

ITEM NO.	PART NUMBER	DESCRIPTION	SHEET 3/QTY.
36	109687-001	ASSY, MAST, XT-4700	1
37	101295-001	SCREW, M8 X 1.25 X 20.0L SHCS, BLACK ZINC, 12.9 STL	4
38	109653-001	ASSY, BATTERY PACK	1
39	102134-001	SCREW, M5 X 0.8 X 18, PAN HEAD, TYPE 1 CROSS RECESSED, SS	21
41	111337-001	ASSY, TRAY SHROUD, XT-4700	1
42	111075-001	SHROUD, BOTTOM RIGHT	1
43	111076-001	SHROUD, BOTTOM LEFT	1
49	110048-001	ASSY, ARM PIVOT, XT-3700/4700, RH	1
50	110049-001	ASSY, ARM PIVOT, XT-3700/4700, LH	1

**OCTANE FITNESS**  
Fuel Your Life

109000-001  
XT-4700 BASE

TOLERANCES ARE:  
DIMINALS ANGLES  
DECIMALS ANGLES  
X1-4700 BASE

APPROVED BY: [Signature] DATE: 10/20/2023  
DRAWN BY: [Signature] DATE: 10/20/2023