


Gumstix Pi Compute Development Board Technical Specifications



COM Connectors	
COMs	1 × DDR2 SODIMM for Raspberry Pi Compute
Connectivity & Headers	
I2C	1 × I2C Header
UART	1 × UART Header
SPI	1 × SPI Header
PWM	2 × PWM Outputs
GPIO	20-Pin Header (16 I/O pins) 2 × LEDs 2 × Pushbuttons
External Camera	COM to CSI2 Connector for Raspberry Pi Cameras
External Display	HDMI Connector COM to DSI Connector for Raspberry Pi Displays
USB	
USB Host	1 × USB Host
USB Device	1 × USB Device
USB Console	1 × USB Serial Console Port
Power	
PMIC	Texas Instruments TPS62111 Step-Down Converter
Power Input	5V/3A Barrel Connector

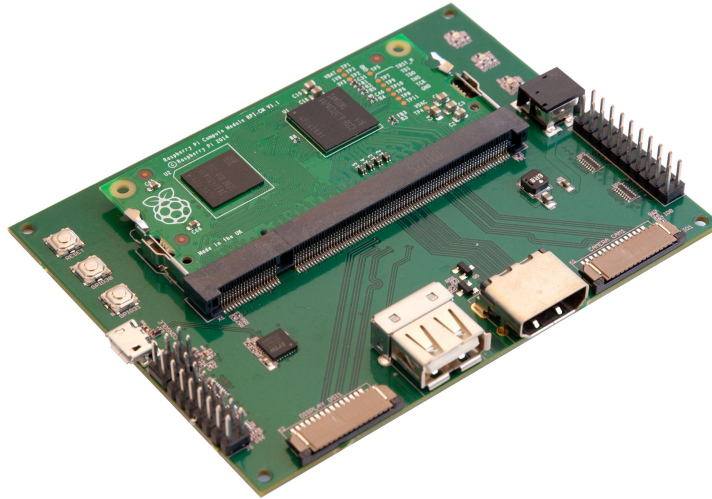