

# PERRIN

## 2018+ WRX/STI License Plate Delete

2020-07-14

PSP-BDY-112

Thank you for purchasing this PERRIN product for your car! Installation of this product should only be performed by persons experienced with installation of aftermarket performance parts and proper operation of high performance vehicles. If vehicle needs to be raised off the ground for installation, the installer must use proper jacks, jack-stands and/or a professional vehicle hoist for safety of the installer and to protect property. If the vehicle is lifted improperly, serious injury or death may occur! Please read through all instructions before performing any portion of installation. If you have any questions, please contact our tech department prior to starting installation. We can be reached in any of the following methods:

Email [Tech@PERRINperformance.com](mailto:Tech@PERRINperformance.com)

Instant Chat off the main page of [www.PERRINperformance.com](http://www.PERRINperformance.com)

Or simply call our tech team at 503-693-1702

### SPECIAL NOTES:


- In some states it is not legal to remove front plate from car. Please check with local law enforcement before installing.

### Parts Included with the PERRIN License Plate Delete:

- (1) PERRIN License Plate Delete for 2018+ WRX/STI
- (2) Rubber Inserts
- (2) 10-32x3/4" Black Oxided SS Button Head Screws

### Installation of PERRIN License Plate Delete

1. Remove existing front license plate from car.
2. Install rubber inserts:
  - a. Locate holes and enlarge holes using a 3/8" drill bit, then place rubber inserts into holes as shown above.
  - b. You can force the rubber inserts into each hole without drilling by using a small amount of grease on the body outside of the insert. The only downfall to doing this method is they will be very difficult to remove later.

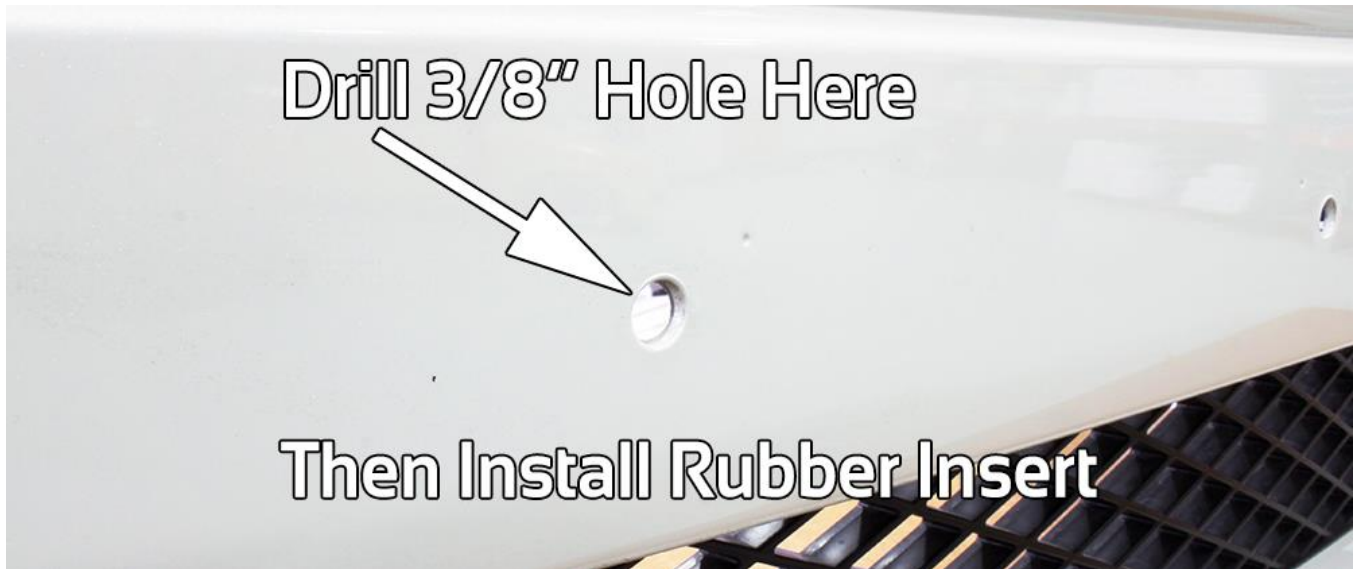

3. Decide which side of plate you want showing and using supplied screws, mount plate to car.
4. As you tighten the screws, the rubber inserts will start to compress and start to grab onto backside of bumper. Simply hand tighten screws until you feel a good amount of resistance. **Note: Just keep in mind that overtightening them can damage the inserts. See picture below showing how they work.**



Picture above shows what insert looks like from behind the bumper.

5. After a few days of driving, check that screws are still tight to ensure plate doesn't fall off car.

Questions, Comments, and Suggestions Contact: [Tech@PERRINperformance.com](mailto:Tech@PERRINperformance.com)  
Visit Our Website for Instant Chat Options at [www.PERRINperformance.com](http://www.PERRINperformance.com)  
Call Our Tech Team at 503-693-1702