


60004 | Mini Gateway Ethernet MGE

The 60004 Mini Gateway Ethernet (MGE) directs access to the ATLAS wireless system through an Ethernet interface. The MGE receives data from Locators and Tags. The Gateway shuttles data between Locators and tags, and the Crisis Controller Software.

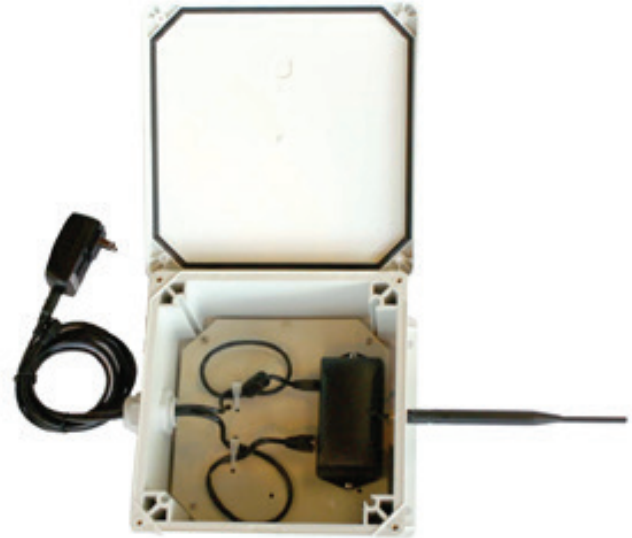

Features & Benefits

- ⚙️ Ethernet Interface: RJ-45 connector / 10/100 Mbps data rate
- ⚙️ External 5V power supply
- ⚙️ Able to receive/transmit in the harshest RF environments
- ⚙️ Monitors RF transmission from Heavy Duty Tags and FPTs
- ⚙️ Monitors RF transmission from LDNs
- ⚙️ Compatible with PALS system components
- ⚙️ Comes in weather proof enclosure (8" x 8" x 4")

Specifications

DIMENSIONS
2.3" x 4.9" x 3.3" (HxWxD)
CASE
Polycarbonate/ABS plastic/Lexan®
WEIGHT
8 ounces
POWER REQUIREMENTS
5V 500mA, <i>(External 5V power supply is provided)</i>
ETHERNET INTERFACE
RJ-45
DATA RATE
10/100 Mbps
OPERATING TEMPERATURE
0 to 50 degrees Centigrade

