


C2F type dismantling joint

TECHNICAL PARAMETERS

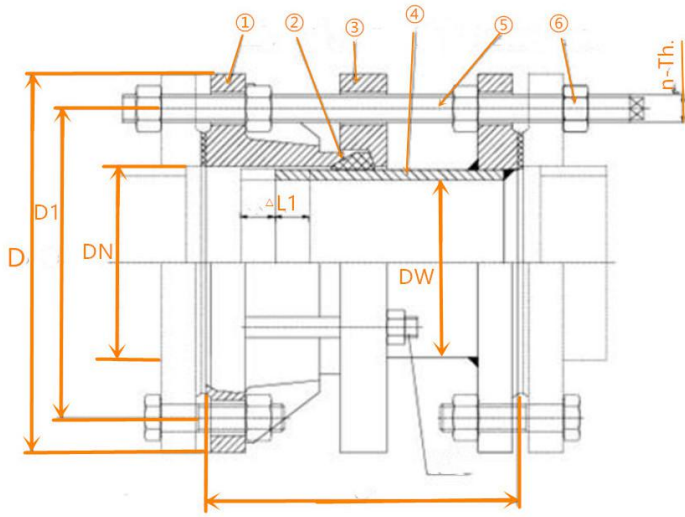

NO.	Name	Material
1	Valve body	Carbon steel SS304 SS316
2	Gasket	NBR EPDM
3	follower	Carbon steel SS304 SS316
4	limited short pipe	Carbon steel SS304 SS316
5	stud	Carbon steel SS304 SS316
6	nut	Carbon steel SS304 SS316


The C2F type dismantling joint is a new product that connects the pump, valve and other equipment to the pipeline. It is connected by bolts to make it a whole and has a certain displacement, so that it can be installed on site according to the installation and maintenance. The dimensions are adjusted so that the axial thrust can be transferred to the entire pipe during operation. This not only improves the work efficiency, but also protects the pumps, valves and other equipment.

MAIN DATA:

I Diameter DN	External diameter of pipe Dw	Length		Flange connecting dimension							
				0.6Mpa				1.0Mpa			
		L	L1	D	D1	n-Th	b	D	D1	n-Th	b
65	76	200	40	160	130	4-M12	16	185	145	4-M16	20
80	89			190	150	4-M16	18	200	160	8-M16	22
100	114			210	170			220	180		
125	140			240	200	8-M16	20	250	210		
150	168			265	225			285	240		
200	219			320	280	22	340	295	12-M20	28	
250	273			375	335	12-M16	24	395			350
300	325	220	50	440	395	12-M20	24	445	400	16-M20	30
350	377			490	445			505	460		
400	426			540	495	16-M20	28	565	515	16-M24	32
450	480			595	550			615	565		
500	530			645	600	20-M20	30	670	620	20-M24	34
600	630			755	705	20-M24	30	780	725		
700	720			240	60	860	810	24-M24	32	895	840
800	820	350	975	920		24-M27	34	1015	950	24-M30	44
900	920		1075	1020				36	1115	1050	28-M30
1000	1020	370	1175	1120		28-M27	36		1230	1160	28-M33
1200	1220		1405	1340		32-M30	40	1455	1380	32-M36	56
1400	1420	380	1630	1560		36-M33	44	1675	1590	36-M39	62
1600	1620		1830	1760		40-M33	48	1915	1820	40-M45	68
1800	1820	400	2045	1970	44-M36	50	2115	2020	44-M45	70	
2000	2020		2265	2180	48-M39	54	2325	2230	48-M45	74	
2200	2220	450	80	2475	2390	52-M39	60	2550	2440	52-M52	80
2400	2420			2685	2600	56-M39	62	2760	2650	56-M52	82
2600	2620	450	80	2905	2810	60-M45	64	2960	2850	60-M52	88
2800	2820			3115	3020	64-M45	68	3180	3070	64-M52	94
3000	3020			3315	3220	68-M45	70	3405	3290	68-M56	100
3200	3220			3525	3430	72-M45	76				

Notes:1.The size meets standard GB/T12465-2007

2.Flange Standard :Flange is available with ANSI / JIS/ BS/ GB/ GOST Standard and so on.

 <p>河南顺赢新能源有限公司 Henan Shunying New Energy Co.,Ltd.</p>	Proposal/Inquiry/Order No:	NOTES:
	Customer Name:	
	Project Name:	
	Contractor:	