


Stainless steel dismantling joint

TECHNICAL PARAMETERS

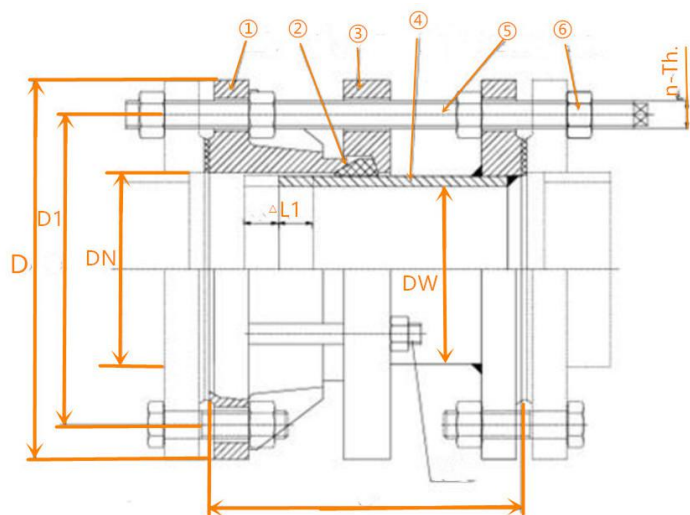

NO.	Name	Material
1	Valve body	SS304 SS316
2	Gasket	NBR EPDM
3	follower	SS304 SS316
4	limited short pipe	SS304 SS316
5	stud	SS304 SS316
6	nut	SS304 SS316


The stainless steel dismantling joint is a new type of product developed on the basis of the original dismantling joint product. This product increases the length of the end tube, effectively avoiding the generation of compensation due to the increase of the length of the pipeline. . The series of disassembly compensation joints are novel and reasonable in design, simple and compact in structure, good in sealing performance, convenient in loading and unloading, firm and reliable in telescopic limit, and long in service life.

MAIN DATA:

I Diameter DN	External diameter of pipe Dw	Length		Flange connecting dimension							
				0.6Mpa				1.0Mpa			
		L	L1	D	D1	n-Th	b	D	D1	n-Th	b
65	76	200	40	160	130	4-M12	16	185	145	4-M16	20
80	89			190	150	4-M16	18	200	160	8-M16	22
100	114			210	170			220	180		24
125	140			240	200	8-M16	20	250	210		8-M20
150	168			265	225			285	240	28	
200	219			320	280	12-M16	24	340	295	12-M20	28
250	273			220	50	375	335	12-M20	24	395	350
300	325	440	395			16-M20	26	445	400	16-M24	32
350	377	490	445					505	460		
400	426	540	495			20-M20	30	615	565	20-M24	34
450	480	595	550			20-M24	30	670	620	20-M27	36
500	530	645	600			24-M24	32	780	725	24-M27	40
600	630	240	60			755	705	24-M27	34	895	840
700	720			860	810	28-M27	36	1015	950	28-M30	46
800	820			975	920			1115	1050	28-M33	50
900	920			1075	1020	1230	1160	32-M36	56		
1000	1020			1175	1120	1455	1380	36-M39	62		
1200	1220			1405	1340	1675	1590	40-M45	68		
1400	1420			1630	1560	1915	1820	44-M45	70		
1600	1620	380	80	1830	1760	2115	2020	48-M45	74		
1800	1820			2045	1970	2325	2230	52-M52	80		
2000	2020			2265	2180	2550	2440	56-M52	82		
2200	2220			2475	2390	2760	2650	60-M52	88		
2400	2420			2685	2600	2960	2850	64-M52	94		
2600	2620			2905	2810	3180	3070	68-M56	100		
2800	2820			3115	3020						
3000	3020	3315	3220								
3200	3220	3525	3430								

Notes:1.The size meets standard GB/T12465-2007

2.Flange Standard :Flange is available with ANSI / JIS/ BS/ GB/ GOST Standard and so on.

 <p>河南顺赢新能源有限公司 Henan Shunying New Energy Co.,Ltd.</p>	Proposal/Inquiry/Order No:	NOTES:
	Customer Name:	
	Project Name:	
	Contractor:	