


## Threaded metal hose pump connector

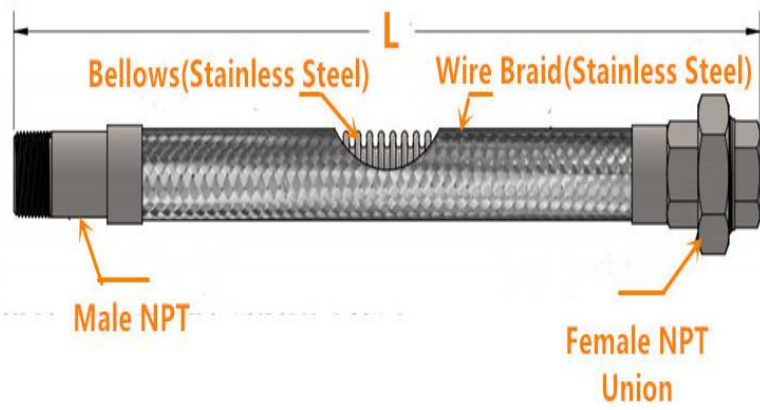


TECHNICAL PARAMETERS	
Working pressure	0.6-4.0Mpa
Working temperature	- 15 ~ 400℃
Material	stainless steel, carbon steel
Connection method	threaded connection
Applicable medium:	water, steam, air, weak acid and alkali, oil, etc.

The threaded metal hose pump connector is a flexible metal component that is used to isolate the vibration of the pump suction side and discharge side pumps. They help prevent damage from vibration, expansion and contraction. Made of stainless steel corrugated metal, these components are surrounded by high-strength stainless steel woven braids that are flexible enough to withstand high pressures and temperatures.

**MAIN DATA:**

Nominal diameter	Inside diameter	Outside diameter mm		Minimum bending radius		Maximum working pressure Mpa	
		Bellwos	With inner braided	Static	Dynamic	Inner braided	Outside braided
8	8.8	13.2	14.4	50	110	15	20
10	11.7	16.5	17.7	65	145	15	20
15	13.5	19.5	21.1	80	180	15	20
20	20	27	28.6	120	270	10	15
25	27	34.5	36.1	160	360	63	10
32	32	40	41.6	175	400	40	63
40	39.6	52	53.6	225	510	40	63
50	49.7	62	63.6	280	640	30	50
65	61.2	80.2	81.8	410	915	30	50

Notes: 1、 Please sent us letter and drawing for customization if you have special requirements.

 <p><b>河南顺赢新能源有限公司</b> Henan Shunying New Energy Co.,Ltd.</p>	Proposal/Inquiry/Order No:	NOTES:
	Customer Name:	
	Project Name:	
	Contractor:	