


Carbon steel Flange Double Sphere Rubber Joint

TECHNICAL PARAMETERS

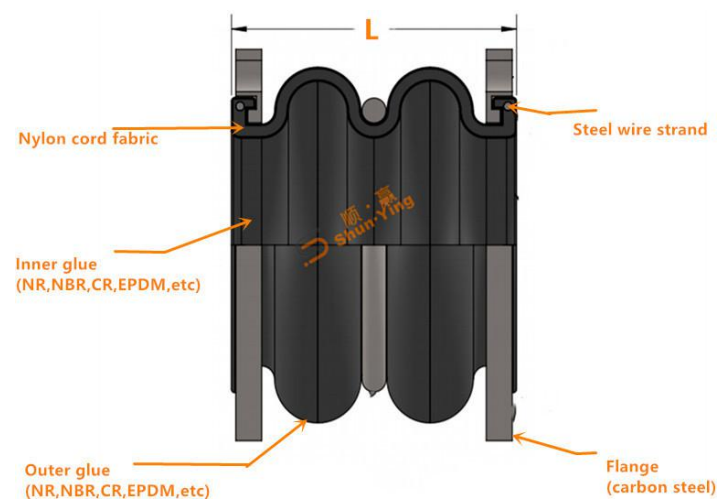

Item/ Model	1	2	3
Working pressure Mpa(kgf/cm²)	1.0(10)	1.6 (16)	2.5 (25)
Explosive pressure Mpa (kgf/cm²)	2.0 (20)	3.0 (30)	4.5 (45)
Vacuum Kpa (mm/Hg)	53.3 (400)	86.7 (650)	100 (750)
Applicable temperature ℃	-15℃~+115℃ special up to -30℃~+250℃		
Applicable medium	acid, alkali, corrosion, oil, hot water, cold water, compressed air, compressed natural gas, etc.		

Spray-painted carbon steel flange double sphere rubber joints are made of independent rubber layers and reinforcement materials which are vulcanized together after moulding or moulding. Spray-painted carbon steel flanges can be made in different colors according to different needs of customers.

MAIN DATA:

Nominal Diameter(DN)		Length L	Diameter of the centraling of the bolt	Hole diameter quantity	Axial displacement		Horizontal displacement	Angular deflection
mm	inch	mm	mm		Extension	Compression	mm	(a1+a2)
40	1½	165	110	18-4	30	50	45	35°
50	2	165	125	18-4	30	50	45	35°
65	2½	175	145	18-4	30	50	45	35°
80	3	175	160	18-8	35	50	45	35°
100	4	225	180	18-8	35	50	40	35°
125	5	225	210	18-8	35	50	40	35°
150	6	225	240	22-8	35	50	40	35°
200	8	325	295	22-8	35	50	40	35°
250	10	325	350	22-12	35	60	35	30°
300	12	325	400	22-12	35	60	35	30°
350	14	330	460	22-16	35	60	35	30°
400	16	330	515	26-16	35	60	35	30°
450	18	330	565	26-20	35	60	35	30°
500	20	350	620	26-20	35	60	35	30°
600	24	350	725	30-20	35	60	35	30°
700	28	350	840	30-24	35	60	35	30°
800	32	400	950	30-34	35	60	35	30°

Notes:1.Please sent us letter and drawing for customization if you have special requirements.
2.Flange Standard :Flange is available with ANSI / JIS/ BS/ GB/ GOST Standard and so on.

 河南顺赢新能源有限公司 Henan Shunying New Energy Co.,Ltd.	Proposal/Inquiry/Order No:	NOTES:
	Customer Name:	
	Project Name:	
	Contractor:	