

Sirocco™

NEMA-4X Emergency Light

The Sirocco™ NEMA-4X rated emergency light is designed for use in commercial and industrial environments, such as hose-down areas, food-processing facilities, parking garages, and other heavy-duty settings. This unit is approved for Wet Location use in the United States as NEMA-4X and is NSF certified for use in food processing plants. The design makes it also ideal for schools and other public facilities. The unit will provide 90 minutes of illumination for rated wattage upon loss of the AC power, and is factory preset with a 15-minute time delay and a non-audible diagnostics. The SREL is Damp and Wet Location UL924 listed.



Features

Body	Highly durable thermoplastic housing mounted with a die-cast aluminum backplate protected entirely by a UV stabilized clear polycarbonate cover Secured with stainless steel tamper-proof screws (bit included)
Mounting	Back mount
Illumination	MR16 Lamps in LED or Halogen available in various wattages Backup power provided by Lead Calcium, NiCAD, or NiMH rechargeable battery
Battery	Maintenance-free NiCAD, NiMH, or Lead Calcium
Operating Temp	Standard: 50°F to 104°F (10°C to 40°C) Heater Option: -40°F to +104°F (-40°C to +40°C)
Electronics	120/277 VAC, 60Hz Standard Multiple conduit knockouts available on the unit. Battery wattage ranges from 18 to 60 Watts for use with your choice of lampheads
Self-Diagnostics (Option)	The unit tests itself one minute every 30 days, 30 minutes on the 6th month and 90 minutes every 12 months. It is capable of full recharge in compliance with UL specifications. Unit includes magnetic test switch. A “Service Required” light is located near the test switch; it will flash in the event of a fault. An LED-based diagnostic display is located inside the unit to identify specific sources of a failure.
Warranty	3 -year limited warranty

Highlights

- Polycarbonate cover for NSF certification
- Vandal resistant
- Stainless steel tamper-proof screws
- Wet Location rating
- Available with Halogen or LED lamps

Compliance

- UL924
- ANSI/NFPA-101
- ANSI/NFPA-70 (NEC)
- ICC (IBC & IFC)
- NSF
- OSHA





Sirocco™

NEMA-4X Emergency Light

Product Dimensions & Details

Weight: 14 lbs. (6.35kg)

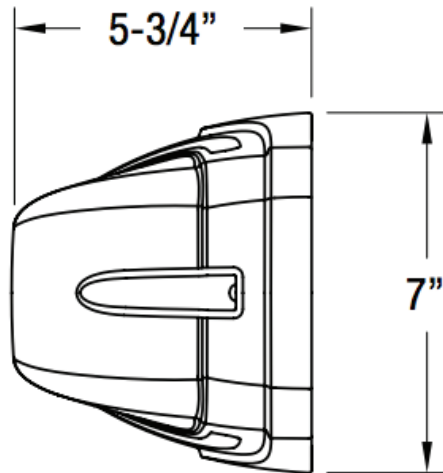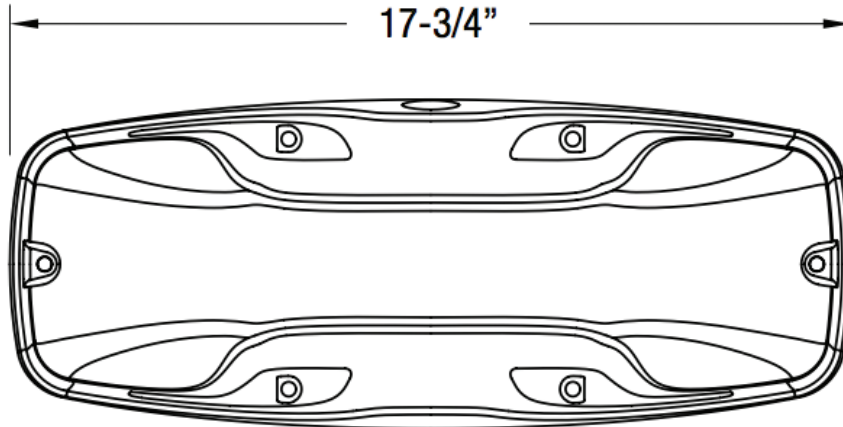

Ordering Information

Example: SREL-LC-2C-BK-RA-H1

Series

SREL = Sirocco™ NEMA-4X Emergency Light

Battery Type

LC = Lead Calcium

NC = NiCad, Nickel Cadmium

NM = NiMH, Nickel Metal Hydride

Operation

2C = 6V, 18W

4A = 12V, 24W

4B = 12V, 36W

4C = 12V, 40W

4E = 12V, 54W

4F = 12V, 60W

Housing Color

BK = Black

WH = White

GY = Gray

Lamp Type

RA = MR16 Halogen 6V, 6W

RC = MR16 Halogen 12V, 12W

RD = MR16 Halogen 12V, 20W

LA = MR16 LED 6V, 4W

LH = MR16 LED 12V, 4W

LJ = MR16 LED 12V, 5W

LK = MR16 LED 12V, 6W

Options

H1 = Internal Heater

SD = Self Diagnostics

Extended Run-Time Chart

		Operation						
		LC 6V, 18W	LC 12V, 24W	LC 12V, 36W	LC 12V, 60W	NiCAD 12V, 24W	NiCAD 12V, 40W	NiMH 12V, 60W
Run-Time	90 mins	18	24	36	54	24	40	60
	2 Hours	12	16	24	36	18	27	40
	3 Hours	8	12	20	27	12	20	30
	4 Hours		8	14	20	8	14	20

The Exit Store LLC
 303 W Lancaster Ave #138
 Wayne, PA 19087
 Toll Free: 844-438-3948 [844-GET-EXIT]
 Tel: 484-913-1916
 Fax: 484-913-1919
 sales@theexitstore.com

www.theexitstore.com