

Titan™

Hazardous Location Combo

The Titan™ Series Hazardous Location Remote Power Pack is rated for use in Class I, Division 1 & 2, Groups C & D and Class II, Division 1 & 2, Groups E, F & G environments. It can be supplied with up to 3 hazardous (lamp or exit) fixtures mounted directly on the unit. Corrosion-resistant, copper-free cast aluminum construction with a Fully Gasketed, spin-off cover, stainless steel vent/drain and silicone conformal coated circuit board protect against moisture. The epoxy finish offers corrosion protection from anticipated environments. The unit features a fused DC output circuit, sealed relay, low-voltage disconnect, and brownout protection. Remote fixtures may be purchased separately.



	Features
Body	Corrosion-resistant, copper-free, epoxy powder-coated cast aluminum
Face	May have 0, 1 or 2 faces
Mounting	Back mount only
Illumination	May have 0, 1, 2, or 3 Tungsten Lamps
Battery	Sealed maintenance-free hi-temp NiCad
Operating Temp	-58°F to 122°F (-50°C to 50°C)
Electronics	120/277 VAC, 60Hz Standard Solid state transfer Combination test switch and pilot light Current limiting, temperature compensated charger Brownout protection Low voltage disconnect provides total load disconnect (battery) protection to guard against deep discharge during extended power outages
Warranty	3 -year limited warranty

Highlights

- Class 1: Division I & II Groups C&D;
Class 2: Division I & II Groups E, F & G
- UL844, UL924, and UL1203 Listed
- Self-contained, maintenance-free NiCad power system

Compliance

- UL884
- UL1203
- UL924
- ANSI/NFPA-101
- ANSI/NFPA-70 (NEC)
- ICC (IBC & IFC)
- OSHA



Titan™

Hazardous Location Combo


Product Dimensions & Details

Weight: 18 lbs. (8.16kg)

Housing:
12" X 12" X 9 1/2"
(4) Mounting Lugs:
10" and 13 1/2" on center

Overall dimensions
(including fixtures):
38" X 38" X 10"

Note: Dimensions are
approximate and are
subject to change.

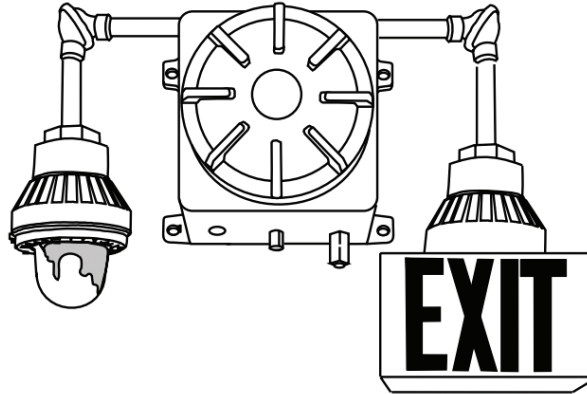

Ordering Information

Example: TTN-2J-G-1-1-SBT

Series

TTN = Titan™ Hazardous Location Remote Power Pack

Operation

2C = 6V, 18W
2E = 6V, 24W
2H = 6V, 36W
2J = 6V, 50W
4B = 12V, 36W
4D = 12V, 50W
4G = 12V, 72W

Legend

Blank
G = Green
R = Red

Face Count

0 = None
1 = Single
2 = Double

Number of Lamps

0 = None
1 = 1
2 = 2
3 = 3

Lamp Type

SA = SBT 6V, 9W
SB = SBT 6V, 12W
SC = SBT 6V, 18W
SE = SBT 6V, 25W
SF = SBT 12V, 12W
SG = SBT 12V, 18W
SH = SBT 12V, 25W

Options

TD = 15-minute time delay

* All exit sign attachments are provided with 25 watt lamp only, emergency lights configured separately

** 50 watt capacity minimum required for all units with exit wording and 1 lamp

The Exit Store LLC
303 W Lancaster Ave #138
Wayne, PA 19087
Toll Free: 844-438-3948 [844-GET-EXIT]
Tel: 484-913-1916
Fax: 484-913-1919
sales@theexitstore.com

www.theexitstore.com

Extended Run-Time Chart

		Operation						
		6V, 18W	6V, 25W	6V, 36W	6V, 50W	12V, 36W	12V, 50W	12V, 72W
Run-Time	90 mins	18	25	36	50	36	50	72
	2 Hours	12	18	21	36	21	36	42
	3 Hours		9	12	18	12	18	24
	4 Hours			6	10	6	10	12