

#### **CODE NUMBER**

3250423

#### **DESCRIPTION**

1.6 gpf, Polished Chrome Finish, Single Flush, Battery, G2 Exposed Sensor Flushometer.

#### **DETAILS**

Flush Volume: 1.6 gpf (6.0 Lpf) (1.6)
Finish: Polished Chrome (CP)

Power Type: BatteryValve: Diaphragm

• Valve Body Material: Semi-red Brass

Fixture Type: Water ClosetFixture Connection: Top

Rough-In Dimension: 24" (610mm)
Spud Coupling: 1 ½" (38mm)
Supply Pipe: 1" (25mm)

### **FEATURES**

- Sweat Solder Adapter with Cover Tube and Cast Set Screw Wall Flange
- Handle Packing, Main Seat, Stop Seat and Vacuum Breaker Molded from PERMEX® Rubber Compound for Chloramine resistance
- User friendly three (3) second Flush Delay
- "Low Battery" Flashing LED
- Infrared Sensor with Multiple-focused, Lobular Sensing Fields for high and low target detection
- Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Flex Tube Diaphragm designed for improved life and reduced maintenance
- Engineered Metal Cover with replaceable Lens Window
- Four (4) Size AA alkaline Batteries included
- Courtesy Flush® Override Button
- 1" I.P.S. Screwdriver Bak-Chek® Angle Stop with Free Spinning Vandal Resistant Stop Cap

PERMEX® Synthetic Rubber Diaphragm with Dual Filtered Fixed Bypass



### **COMPLIANCES & CERTIFICATIONS**







(ADA Compliant, cUPC Certified, BAA Compliant)

#### RECOMMENDED SPECIFICATION

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi- Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

#### VALVE OPERATING PRESSURE (FLOWING)

15-80 PSI (103-552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

## **DOWNLOADS**

- Optima Plus Valve Installation Instructions
- G2 Repair and Maintenance Guide
- Control Stop Repair and Maintenance Guide
- Flush Connections Flanges Repair and Maintenance Guide
- Tail Piece Repair and Maintenance Guide
- Sloan Optima Plus Repair and Maintenance Guide
- Additional Downloads

## NOTES


All information contained within this document subject to change without notice.

Looking for other variations of the G2 8115 product? View the general spec sheet with all options.

Find a compatible urinal for this flushometer.
Find a compatible water closet for this flushometer.



# **ROUGH-IN**

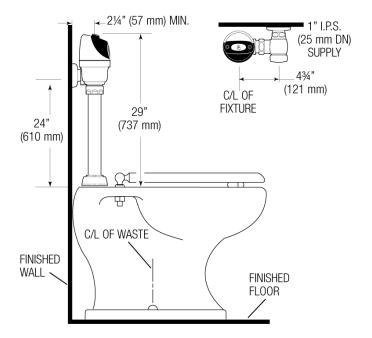

The Model 8115 valve is designed for installations where the water supply is roughed-in 24" (610 mm) above the top of the water closet.

