LED Flush Mount

LD3-FM12W18

NSTALLATION SHEET

START FROM HERE

- Make sure POWER is COMPLETELY OFF at the fuse box
- Have your fixture installed by a qualified licensed electrician
- Prepare everything in a clear area
- Wear gloves at all time during this installation
- · Read instructions carefully before you start assembly
- Keep this installation sheet for future reference

Technical Support: 1-855-855-8926


Please Note:


- This Kuzco LED fixture comes with pre-wired LED module(s).
- Unless instructed to do so, please do not touch any part of the LED module(s) as any unnecessary contact with the module could cause permanent damage.
- For dimming, an ELV (Electronic Low Voltage), TRIAC or 0-10V type of dimmer is required.
- 120-277V input

Conduit Installation

Note: Conduit and conduit fitting not included

- 1. Remove fixture from its original package
- 2. Use hand tool (5a) to remove mounting plate (1a) from fixture (2a) (See Illustration 1)
- **3.** Drill holes for conduit (**not included**) and mounting screws (**1e**) using template guide on page 2
- 4. Make proper electrical connections (black to hot "L", white to neutral "N", ground to "GND") with wire nuts (1b) provided in hardware package. Connect 0-10V dimming wire, DIM+ to purple, DIM- to gray, with wire nuts provided
- **5.** Attach mounting plate (1a) to conduit fitting (not included), then secure mounting plate (1a) to mounting surface with screws (1e) and anchors (1d)
- **6.** Twist fixture (2a) onto mounting plate (1a) and secure with fixture screw (2b)

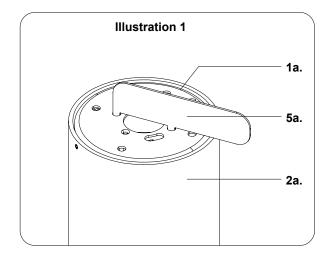

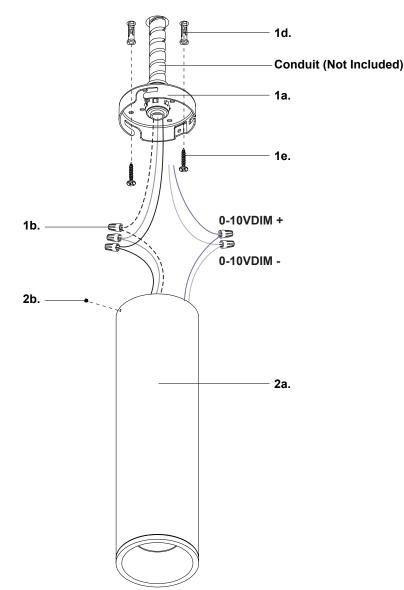



LED Flush Mount

LD2-FM12W12

NSTALLATION SHEET

START FROM HERE

- Make sure POWER is COMPLETELY OFF at the fuse box
- Have your fixture installed by a qualified licensed electrician
- Prepare everything in a clear area
- Wear gloves at all time during this installation
- · Read instructions carefully before you start assembly
- Keep this installation sheet for future reference

Technical Support: 1-855-855-8926

Please Note

- This Kuzco LED fixture comes with pre-wired LED module(s).
- Unless instructed to do so, please do not touch any part of the LED module(s) as any unnecessary contact with the module could cause permanent damage.
- For dimming, an ELV (Electronic Low Voltage), TRIAC or 0-10V type of dimmer is required.
- 120-277V input

Mounting Holes Template Guide

