


# LUMIÈRE CONFIGURATION - E

LUMIÈRE LIGHT WALL

PRODUCT CODE: LLW15E



On frame On graphic

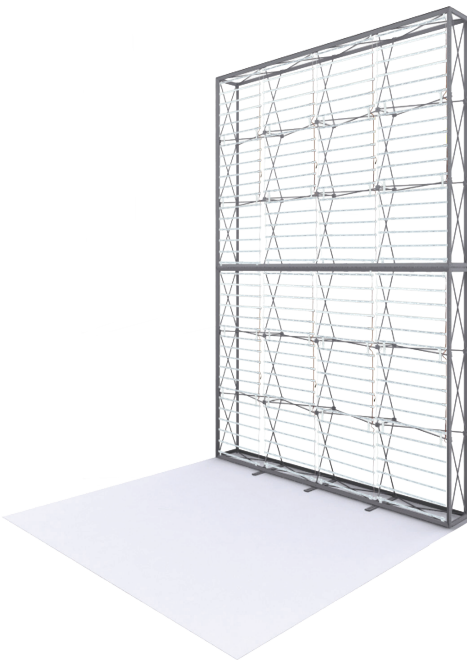

Straight Connector

## PRODUCT DESCRIPTION

Illuminate your message with the Lumière Light Wall! Lumière ladder lights make backlit graphics pop on this innovative combo display of silicone-edge graphics and portable RPL fabric pop ups. Plus, the Lumière shrinks down in size: simply collapse the geometric frame and the SEG bungeed channel bars, and fold or roll the fabrics graphics. Setup requires 1 person and 5-10 minutes. SEG portability is easy and stylish.

DISPLAY DIMENSION	118.1" W x 117" H x 14.5" D
-------------------	-----------------------------

## GRAPHIC DIMENSIONS

4X3 MAIN GRAPHICS	118.5" W x 89" H (4 Graphics)
-------------------	-------------------------------

4X3 END CAP GRAPHICS	14.25" W x 89" H (4 Graphics)
----------------------	-------------------------------

## FRAME CONFIGURATION QUANTITY

4X3 FRAME	2 Frames
-----------	----------

## GRAPHIC MATERIAL

UV Backlit Fabric

## GRAPHIC FINISHING

Silicone beading is sewn around the perimeter of the fabric graphic. Silicone beading is hidden from view once installed.

## DISPLAY CONSTRUCTION

Aluminum Frame

## LADDER LIGHTS SPECIFICATION

EACH LIGHT BEAD	0.8W
-----------------	------

ANGLE	160°
-------	------

OPERATING VOLTAGE	DC12V/24V
-------------------	-----------

TOTAL WATTAGE	1036.8W
---------------	---------

TOTAL AMPERAGE	86.4A
----------------	-------

## TRANSFORMER SPECIFICATION

OUTPUT	12V/29A
--------	---------

INPUT	100-120VAC/6.8A 200-240VAC/3.4A 50/60Hz
-------	---

## SHIPPING WEIGHTS & DIMENSIONS

Lumière Ladder Lights (2 boxes total)

Shipping Weight	31 lbs (each box)
-----------------	-------------------

Shipping Dimensions	13" L x 12" W x 37" H (each box)
---------------------	----------------------------------

4x3 Lumière Light Wall (2 boxes total)

Shipping Weight	35 lbs (frame only) (each box) 39 lbs (with graphics) (each box)
-----------------	---

Shipping Dimensions	34" L x 14" W x 9" H (each box)
---------------------	---------------------------------

## GRAPHIC TURN AROUND TIME

2 business days after proof approval

AVAILABILITY	CA and PA
--------------	-----------

## AVAILABLE ACCESSORIES



La Caja Case



Tahoe Case



Hard Case Podium



Medium Hard Case



Half Hard Case



Genie Counter Case

# LUMIÈRE CONFIGURATION - E

LUMIÈRE LIGHT WALL

PRODUCT CODE: LLW15E

## PARTS LIST




Qty 4 - Pop Up Frame



Qty 8 - 4 Section  
Channel Bars



Qty 8 - 3 Section  
Channel Bars



Qty 8 - End Cap  
Channel Bars



Qty 2 - Carry Bag




Qty 2 - Channel Bar Bag



Qty 8 - Straight Connector



Qty 3 - Stabilization Feet



Qty 8 - Ladder Lights




Qty 8 - Transformers



Qty 2 - Transformer  
Power Cord



Qty 8 - Male / Female  
Transformer Connector  
Cords



Qty 32 - Top/Bottom  
Middle Light Brackets



Qty 32 - Top/Bottom  
Light Bracket

# LUMIÈRE CONFIGURATION - E

LUMIÈRE LIGHT WALL


PRODUCT CODE: LLW15E

## SET UP INSTRUCTIONS


### Set Up Pop Up Frame



**a.** Place frame with the adjustable feet facing down.




**b.** Expand the frame.

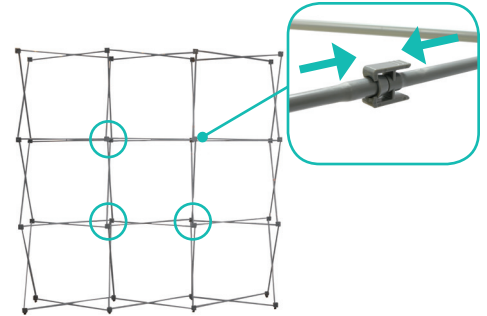


**c.** Close frame by pushing the outside of the frame until male and female ends connect.


### Insert Channel Bars

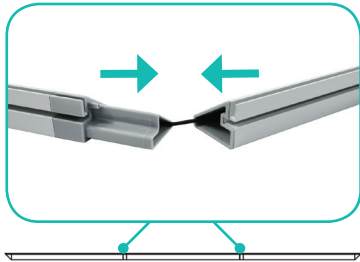

**a.** Expand each channel bar. Follow bungee to connect.

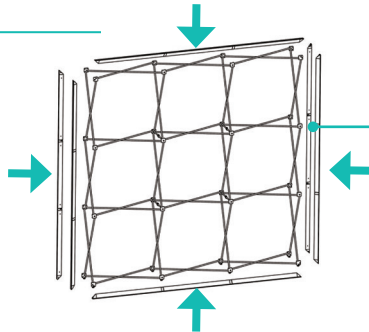

**b.** Attach channel bars to frame.

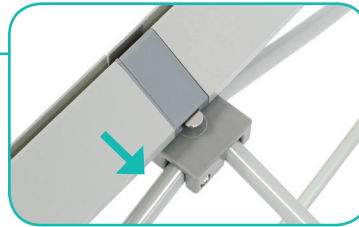

**c.** Slide channels bars onto frame, from top to bottom, then secure onto metal peg.



**d.** Attach the top and bottom end-caps on each side of the frame.


### Hook Ladder Lights




**a.** Hang ladder lights by placing the brackets on the top and bottom of the frame.



**b.** Snap brackets onto ladder lights. Then place brackets on the top and bottom middle frame.

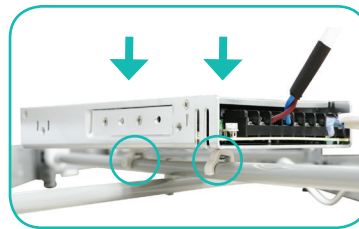

**c.** Place transformers on the bottom of the frame by snapping onto the cross sections.

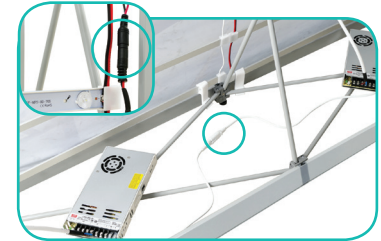

**d.** Connect all wire transformers and ladder lights together. Then plug each transformers together.

### Install Graphic



**a.** In each corner, insert the silicone edge beading into the groove.




**b.** Then insert the remainder of the beading. Repeat backlit installation for the back frame.



**c.** Then repeat graphic installation on the end caps for each side.

## SET UP INSTRUCTIONS

### Connecting Top Walls

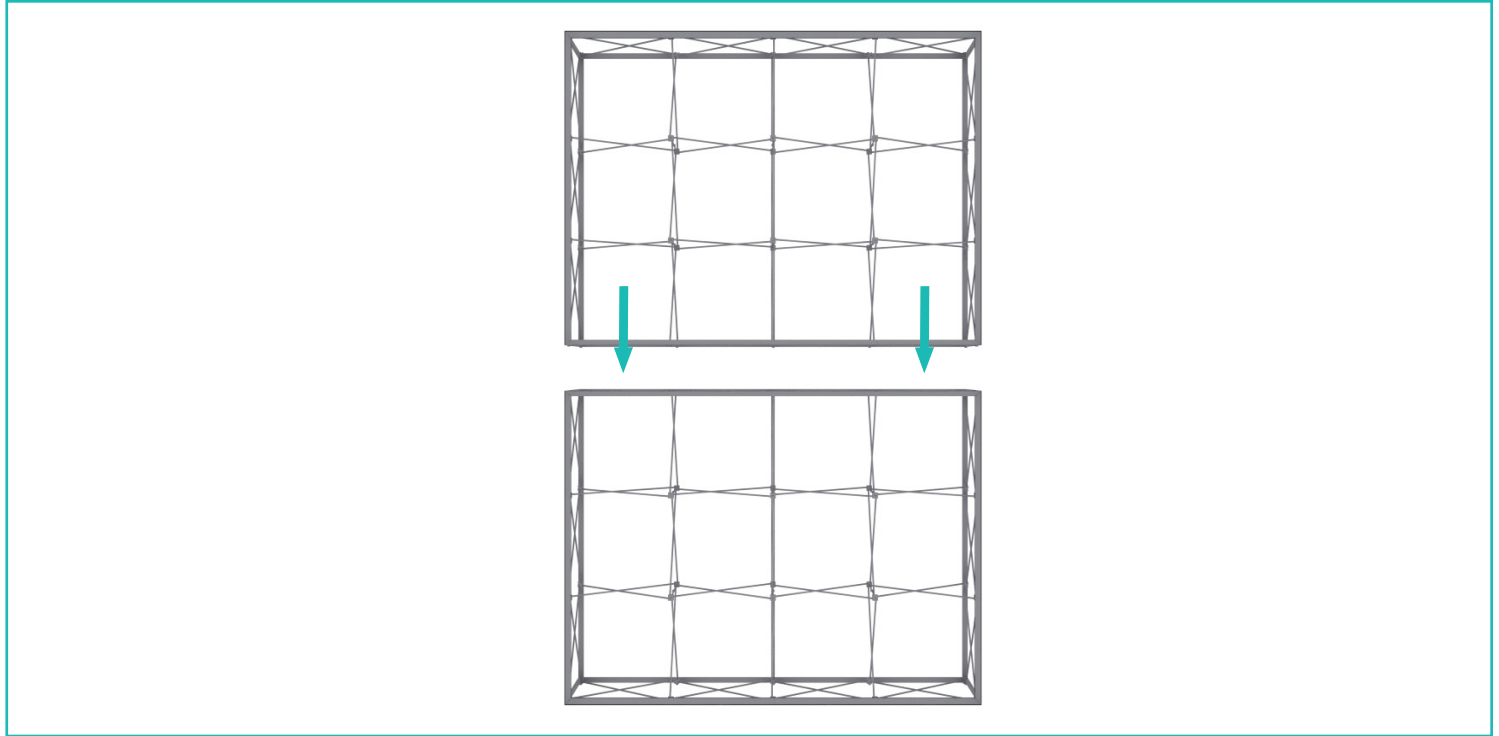

Place the 4x3 frame on top of the 4x3 frame.


**Note:** 2 people are required to hold each side of the top frame while the third person secures with the Straight Connectors.

**Note:** Rendering shown without graphics for clarity. 4x3 front side graphic must be installed first before placing the frames on top.


### Straight Connection




\*Starting from behind, make sure the frames are flushed next to each other.

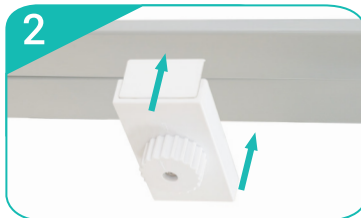

Slide Straight Connector onto the channel bars of both frames.

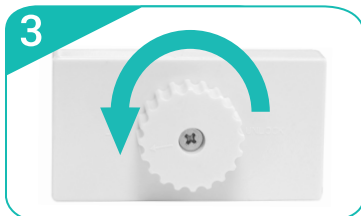

Turn dial to the left to lock the Straight Connector in place. Repeat for each vertical sections (8 total).

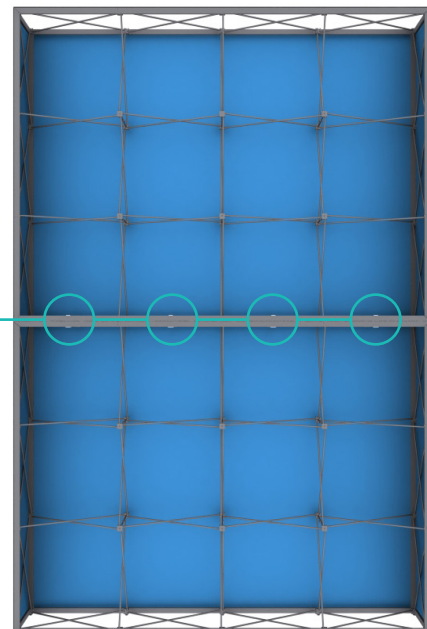

\*Back side of the stacked 4x3 frames shown above.


# LUMIÈRE CONFIGURATION - E

LUMIÈRE LIGHT WALL

PRODUCT CODE: LLW15E

## TEMPLATE GUIDE

### Front View

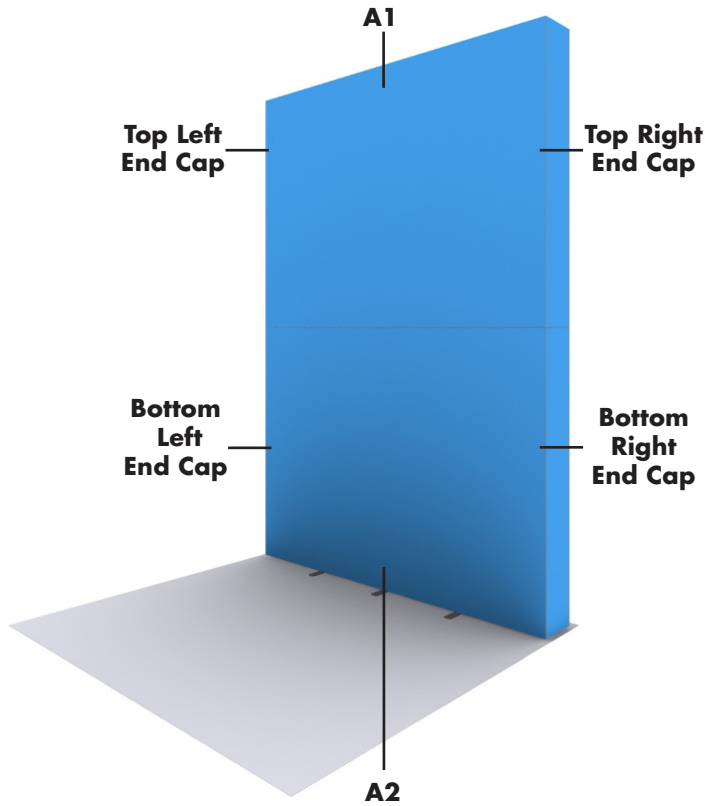

### Back View

