

WLE™

Wet Location Exit Sign

The WLE™ Wet Location Exit Sign is a rugged and durable exit sign suitable for wet, dirty, and dusty areas. The fixture has a corrosion-resistant polycarbonate enclosure that seals out moisture, dust, and other elements. The Wet Location Exit Sign legend is illuminated by high output, energy efficient red or green LEDs. It features a long-life, maintenance-free NiCad battery that provides 90 minutes of illumination when AC power is lost. For backup models installed in environments where temperatures drop below 32° F, a battery heater can be added on to ensure functionality in freezing environments. This sign is only available in back mount and single-face configurations.



	Features
Body	Corrosion resistant, Gasketed, 5VA flame retardant, UV-stabilized, polycarbonate enclosure in industrial gray with clear polycarbonate cover.
Face	Single face Field-selectable directional chevrons
Mounting	Back mount
Illumination	Energy-efficient LED light source is paired with a color-matched diffuser providing uniform red or green illumination
Battery	Long life, maintenance-free, NiCad battery
Operating Temp	-4°F to 122°F (-20°C to 50°C)
Electronics	Dual voltage, field-selectable input 120/277 VAC, 60Hz is standard External LED status indicator and push-to-test switch Solid state transfer and charger Low-voltage disconnect provides total load disconnect (battery) protection to guard against deep discharge during extended power outages
Self-Diagnostics (Option)	The self-diagnostic test feature conducts tests monthly, biannually and annually to ensure the unit is operating reliably and meeting all relevant safety codes.
Warranty	3 -year limited warranty

Highlights

- Wet Location listed
- Fully Gasketed construction seals out moisture
- Battery heater (option) enables operation in cold temperature
- Vandal-resistant polycarbonate construction

Compliance

- ANSI/NFPA-101
- ANSI/NFPA-70
- ANSI/UL924
- ICC (IBC & IFC)
- OSHA




WLE™

Wet Location Exit Sign

Product Dimensions & Details

Weight: 13 lbs. (5.89kg)

Ordering Information

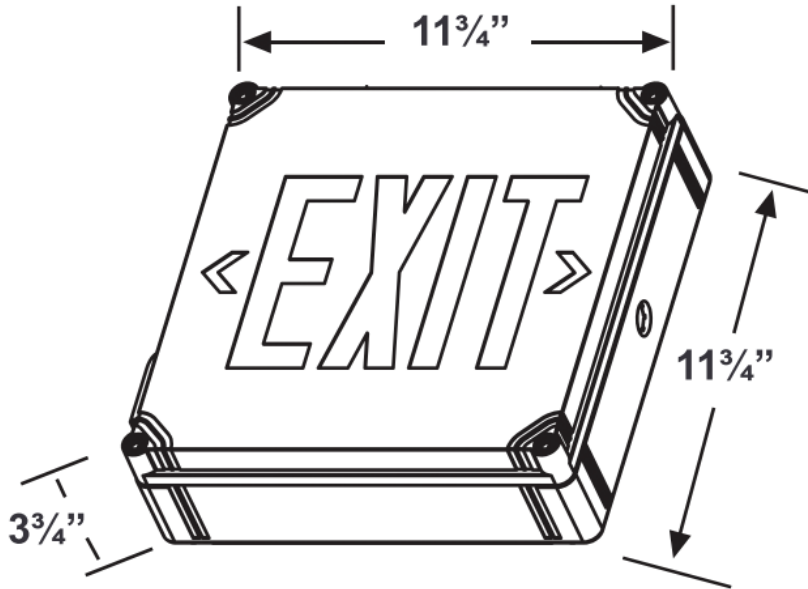

Example: WLE-AC-G-1-MB

Series

WLE = WLE™ Wet Location Exit Sign

Operation

AC = AC Only

EM = Battery Backup

Legend

G = Green

R = Red

Face Count

1 = Single

Mounting

MB = Back Mount

Options

H1 = Internal Heater

SD = Self Diagnostics

CX = Dual Circuit 120/277 VAC

Power Consumption

Power Input: 120/277 VAC

Operation	Max Watts
Battery Backup	5.4W

The Exit Store LLC
 303 W Lancaster Ave #138
 Wayne, PA 19087
 Toll Free: 844-438-3948 [844-GET-EXIT]
 Tel: 484-913-1916
 Fax: 484-913-1919
 sales@theexitstore.com

www.theexitstore.com