

RoHS Compliant 515-1154-801F Lightpipe

Part Numbers with the "F" suffix ending are RoHS Compliant.

Packaging is marked with "RoHS Compliant" label or equivalent markings.

REV	REVISIONS	DRN	CKD	APP	DATE
А	NEW RELEASE	WFB	JTD	Ν.Ο.	6 - 3 - 14
В	TOLERANCE ON .473 DIM WAS ±.003	LD		NO	10-9-19
С	.942REF.WAS.945;.468+/003 WAS .473; ADDED.474+/003 AND .125	JGL		NO	5/18/2020

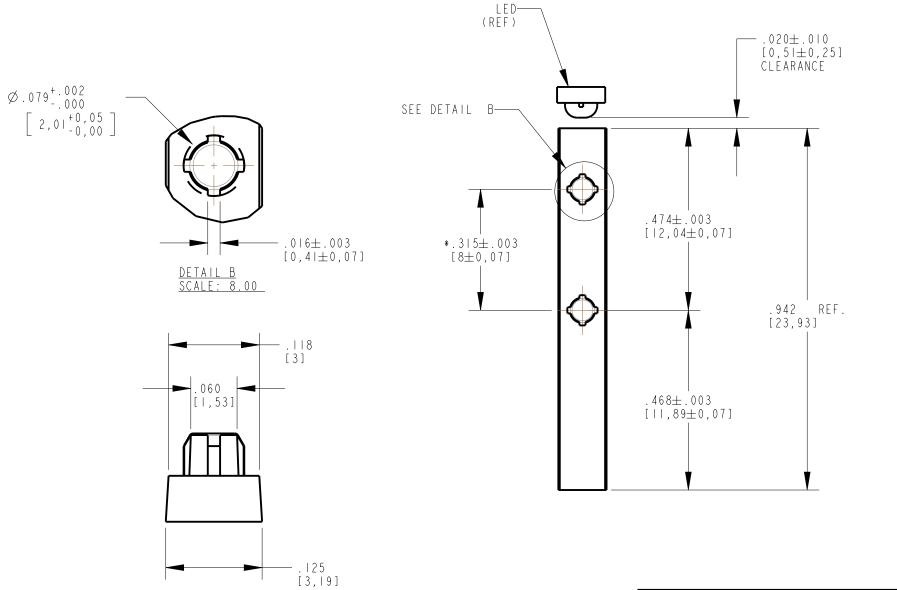

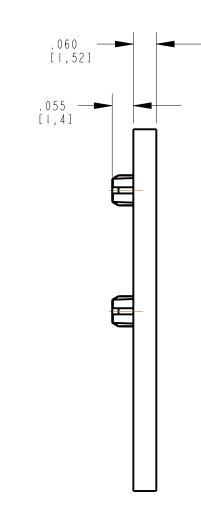

- 1. COMPONENT MOLDED IN A CLEAR TRANMISSIVE POLYCARBONATE, UL 94V-0 GRADE.
 2. COMPONENT DESIGNED TO BE PRESSED INTO P.C. BOARD.
 3. DIALIGHT LIGHTPIPE PART NUMBER: 515-1154-801F
 4. RECOMMENDED LIGHT SOURCE: RIGHT ANGLE LED FROM

- DIALIGHT LED SELECTOR GUIDE
- 5. ALL SURFACES ARE POLISHED WITH EXCEPTION OF PRESS FIT PINS.6. * DENOTES CRITICAL DIMENSION OR SPECIFICATION

* . 315± . 002 * Ø . 076± . 002	
*D.076±.002 — [1,93±0,05] 6 PLACES RECOMMENDED HOLE PATTERN LAYOUT	

THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT CORP. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT CORP.

SCALE: 2.000	DRAWING NUMBER	REV			
ALL DIM's: INCH (mm)	$C = I \circ A \circ$	\sim			
TOLERANCES: UNLESS OTHERWISE SPECIFIED	C - 18043				
FRACTIONS: ±1/64 DECIMALS (.XX): ±.01 DECIMALS (.XXX): ±.005	TITLE SINGLE ELEMENT LP .945"LG ROHS COMPLIANT				
DECIMALS (.XXXX): ±.0005 ANGLES: ±1°	MATERIAL				
FINISH	Dialight 1501 ROUTE 34 SOUTH FARMINGDALE, NJ 07727 (732) 919-3119 www.dialight.com				
FSCM 83330	SHEET I OF I FAMILY TABLE:	<u> </u>			