


CABLE LE LANYARD

LANYARD

TECHNICAL DATA & SELL SHEET - ISSUE 1

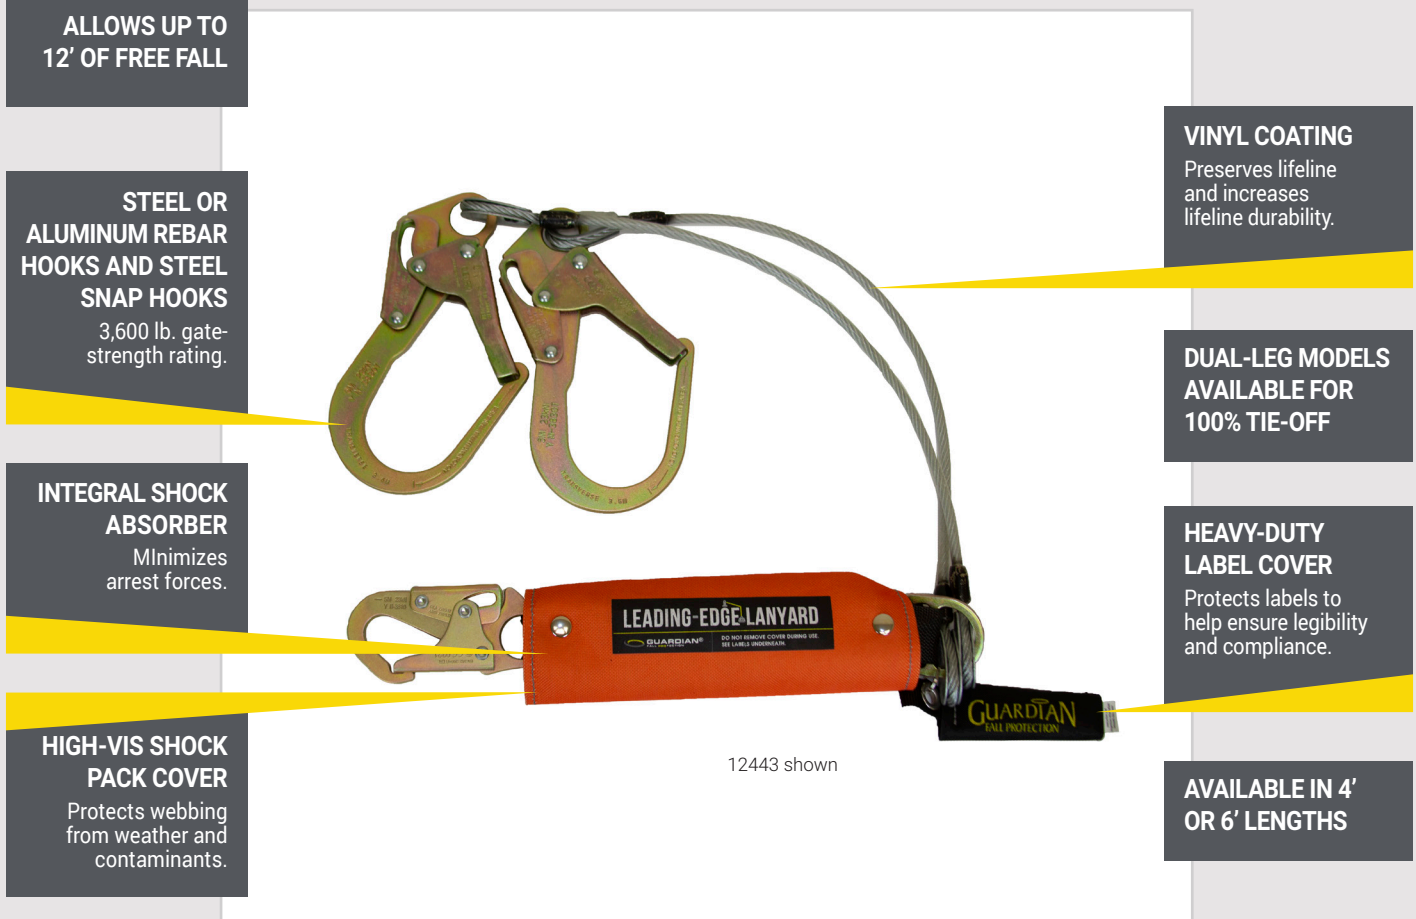

Cable: 3/8" Vinyl-Coated Galvanized Steel
Hooks: Galvanized Steel OR Aluminum **Webbing/Shock Pack:** Polyester & Nylon
Capacity (for LE & 6'-12' Non-LE Free Fall Applications): 130-310 lbs.
Capacity (for Up to 6' Non-LE Free Fall Applications): 130-420 lbs.

FOR MORE INFO, PLEASE CALL **1.800.466.6385** OR VISIT **GUARDIANFALL.COM**


CABLE LE LANYARD

LANYARD

TECHNICAL DATA & SELL SHEET - ISSUE 1

Standards

- OSHA 1910
- OSHA 1926 Subpart M
- ANSI Z359.13-2013
- ANSI A10.32-2012

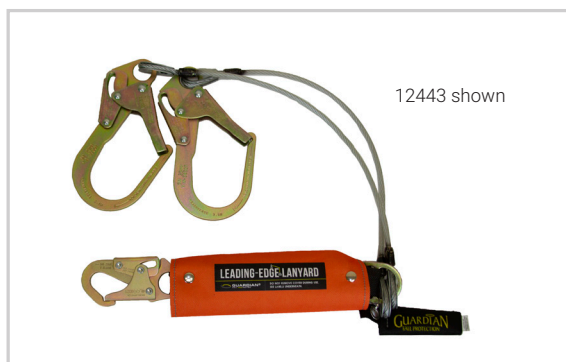

Performance:

- Length: 4 or 6 ft.
- Maximum Users: 1
- Maximum Elongation: 60"

Notes:

- Do not remove shock pack cover during use.
- Remove this lanyard from service if a fall has occurred.

Verified for leading edge applications by Guardian Fall Protection through extensive testing in an ISO/IEC: 10725-compliant laboratory. Dynamically drop tested over a .005" radius steel edge with lifeline in both perpendicular and offset orientations.

Applications



Personal Fall Arrest: Cable LE Lanyard may be used to support a Maximum 1 Personal Fall Arrest System (PFAS) for use in Fall Arrest applications. Structure must withstand loads applied in the directions permitted by the system of at least 5,000 lbs.



Restraint: Cable LE Lanyard may be used in Restraint applications. Restraint systems prevent workers from reaching the leading edge of a fall hazard. Always account for fully deployed length of lanyard/SRL. Structure must withstand loads applied in the directions permitted by the system of at least 1,000 lbs. No free fall is permitted. Restraint systems may only be used on surfaces with slopes up to 4/12 (vertical/horizontal). Applicable D-rings: Dorsal, Chest, Side, & Shoulder.

HOOK TYPES



Steel Snap Hook



Steel Rebar Hook



Aluminum Rebar Hook

Prod. Code	Description	Length	User Weight
12441	Cable LE Lanyard: Single-Leg Vinyl-Coated Cable w/ Steel Rebar Hook	4'	130-420 lbs
12442	Cable LE Lanyard: Double-Leg Vinyl-Coated Cable w/ Steel Snap Hooks	4'	130-420 lbs
12443	Cable LE Lanyard: Double-Leg Vinyl-Coated Cable w/ Steel Rebar Hooks	4'	130-420 lbs
12444	Cable LE Lanyard: Single-Leg Vinyl-Coated Cable w/ Steel Snap Hook	6'	130-420 lbs
12445	Cable LE Lanyard: Single-Leg Vinyl-Coated Cable w/ Steel Rebar Hook	6'	130-420 lbs
12446	Cable LE Lanyard: Double-Leg Vinyl-Coated Cable w/ Steel Snap Hooks	6'	130-420 lbs
12447	Cable LE Lanyard: Double-Leg Vinyl-Coated Cable w/ Steel Rebar Hooks	6'	130-420 lbs
12448	Cable LE Lanyard: Double-Leg Vinyl-Coated Cable w/ Aluminum Rebar Hooks	4'	130-420 lbs