## **LED Flush Mount**

## LD4-FM06W18

INSTALLATION SHEET

### START FROM HERE

- Make sure POWER is COMPLETELY OFF at the fuse box
- Have your fixture installed by a qualified licensed electrician
- Prepare everything in a clear area
- · Wear gloves at all time during this installation
- · Read instructions carefully before you start assembly
- · Keep this installation sheet for future reference


**Technical Support:** 1-855-855-8926

#### Please Note

- This Kuzco LED fixture comes with pre-wired LED module(s).
- Unless instructed to do so, please do not touch any part of the LED module(s) as any unnecessary contact with the module could cause permanent damage.
- For dimming, an ELV (Electronic Low Voltage), TRIAC or 0-10V type of dimmer is required.
- 120-277V input

#### **Octagon Junction Box Installation**

- 1. Remove fixture from its original package
- 2. Use hand tool (5a) to remove mounting plate (1c) from fixture (3a) (See Illustration 1)
- Attach mounting plate (1c) to electrical junction box (1a) using junction box screws provided (1e) in hardware package
- 4. Make proper electrical connections (black to hot "L", white to neutral "N", ground to "GND") with wire nuts (1b) provided in hardware package. Connect 0-10V dimming wire, DIM+ to purple, DIM- to gray, with wire nuts provided
- 5. Twist fixture (3a) onto mounting plate (1c) and secure with fixture screw (3b)

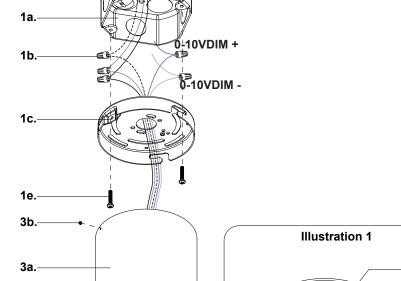

#### **Conduit Installation**


1c.

5a.

3a.

Note: Conduit and conduit fitting not included

- 1. Remove fixture from its original package
- 2. Use hand tool (5a) to remove mounting plate (1c) from fixture (3a) (See Illustration 1)
- **3.** Drill holes for conduit (**not included**) and mounting screws (**1e**) using template guide on page 2
- 4. Make proper electrical connections (black to hot "L", white to neutral "N", ground to "GND") with wire nuts (1b) provided in hardware package. Connect 0-10V dimming wire, DIM+ to purple, DIM- to gray, with wire nuts provided
- Attach mounting plate (1c) to conduit fitting (not included), then secure mounting plate (1c) to mounting surface with screws (1e) and anchors (1d)
- **6.** Twist fixture (3a) onto mounting plate (1c) and secure with fixture screw (3b)

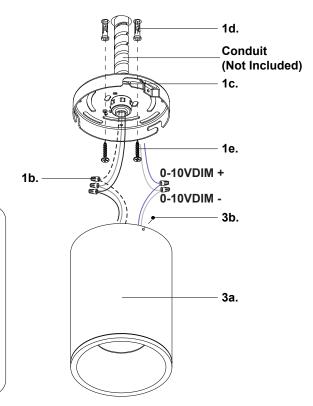



# **LED Flush Mount**

LD4-FM06W18

NSTALLATION SHEET

### START FROM HERE

- Make sure **POWER** is **COMPLETELY OFF** at the fuse box
- Have your fixture installed by a qualified licensed electrician
- Prepare everything in a clear area
- Wear gloves at all time during this installation
- · Read instructions carefully before you start assembly
- Keep this installation sheet for future reference

**Technical Support:** 1-855-855-8926

#### Please Note

- This Kuzco LED fixture comes with pre-wired LED module(s).
- Unless instructed to do so, please do not touch any part of the LED module(s) as any unnecessary contact with the module could cause permanent damage.
- For dimming, an ELV (Electronic Low Voltage), TRIAC or 0-10V type of dimmer is required.
- 120-277V input

### **Mounting Holes Template Guide**

